

A

Docket No. 096990-026-127

Commissioner of Patents and Trademarks
BOX PATENT APPLICATION
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

jc564 U.S. PTO
09/453327
12/02/99

Transmitted herewith for filing is the patent application of

Inventor(s): HEENAN, Sidney A.
MONTALBANO, Anthony A.
COMAN, Liviu A.
COUZIN, Dennis I.

For (title):

RETROREFLECTIVE ARTICLES HAVING MICROCUBES, AND TOOLS AND
METHODS FOR FORMING MICROCUBES

1. Type of Application

This new application is for a(n):

- ☐ Original
☐ Design
☐ Plant
☒ Divisional
☐ Continuation
☐ Continuation-in-part (CIP)

2. Benefit of Prior U.S. Application(s) (35 USC 120)

- ☒ The new application being transmitted claims the benefit of prior U.S. application(s) and enclosed are ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.

3. Papers Enclosed Which Are Required For Filing Date Under 37 CFR 1.53(b) (Regular) or 37 CFR 1.153 (Design) Application

- 74 Pages of specification
17 Pages of claims
1 Pages of Abstract
27 Sheets of drawings
☐ formal
☒ informal

4. Additional papers enclosed

- ☒ Preliminary Amendment
☐ Information Disclosure Statement
☐ Form PTO-1449
☐ Citations
☐ Declaration of Biological Deposit
☐ Authorization of Attorney(s) to Accept and Follow Instructions from Representative
☐ Special Comments
☐ Other

5. Declaration or oath

☐ Enclosed
executed by

- ☐ inventor(s).
☐ legal representative of inventor(s). 37 CFR 1.42 or 1.43.
☐ joint inventor or person showing a proprietary interest on behalf of inventor who refused to sign or cannot be reached.

☐ this is the petition required by 37 CFR 1.47 and the statement required by 37 CFR 1.47 is also attached. See item 13 below for fee.

☒ Not Enclosed.

- ☒ Application is made by a person authorized under 37 CFR 1.41(c) on behalf of all the above named inventor(s). The declaration or oath, along with the surcharge required by 37 CFR 1.16(e) can be filed subsequently.
☐ Showing that the filing is authorized.

6. Inventorship Statement

The inventorship for all the claims in this application are:

☒ The same

or

- ☐ Are not the same. An explanation, including the ownership of the various claims at the time the last claimed invention was made,
☐ is submitted.
☐ will be submitted.

7. Language

- ☒ English
☐ non-English
☐ the attached translation is a verified translation. 37 CFR 1.52(d).

8. Assignment

 x A copy of the assignment of the invention to **Stimsonite Corporation**

 is attached.

 x will follow.

9. Certified Copy

Certified copy(ies) of application(s)

(country)	(appln. no.)	(filed)
(country)	(appln. no.)	(filed)
(country)	(appln. no.)	(filed)

from which priority is claimed

 is(are) attached.

 will follow.

10. Fee Calculation (37 CFR 1.16)

A. x Regular application

CLAIMS AS FILED

	Number filed				Number Extra				Rate	Basic Fee
										\$ 760.00
Total Claims	111	-	20	=	91	x	\$18.00 =			\$1,638.00
Independent Claims (37 CFR 1.16(b))	15	-	3	=	12	x	\$ 78.00 =			\$ 936.00
Multiple dependent claim(s), if any (37 CFR 1.16(d))								\$260.00		\$ 260.00

 Amendment cancelling extra claims enclosed.

 Amendment deleting multiple dependencies enclosed.

 Fee for extra claims is not being paid at this time.

Filing Fee Calculation \$3,594.00

B. ☐ **Design application**

(\$330.00 - 37 CFR 1.16(f))

Filing Fee Calculation \$

C. ☐ **Plant application**

(\$480.00 - 37 CFR 1.16(g))

Filing Fee Calculation \$

11. **Small Entity Statement(s)**

☐ Copy of the Verified Statement that this is a filing by a small entity under 37 CFR 1.9 and 1.27 is attached

Filing Fee Calculation (50% of A, B or C above) \$

12. **Request for International-Type Search (37 CFR 1.104(d))**

☐ Please prepare an international-type search report for this application at the time when national examination on the merits takes place.

13. **Fee Payment Being Made At This Time**

☐ Not Enclosed

☐ No filing fee is to be paid at this time.

☒ Enclosed

☒ basic filing fee \$3,594.00

☐ recording assignment
(\$40.00; 37 CFR 1.21(h)) \$

☐ petition fee for filing by
other than all the inventors
or person on behalf of the
inventor where inventor
refused to sign or cannot
be reached. (\$130.00;
37 CFR 1.47 and 1.17(h)) \$

☐ for processing an application
with a specification in a
non-English language.
(\$130.00; 37 CFR 1.52(d)
and 1.17(k)) \$

☐ processing and retention
fee (\$130.00; 37 CFR
1.53(d) and 1.21(l))

_____ fee for international-type
search report (\$35.00;
37 CFR 1.21(e)) \$

TOTAL \$3,594.00

14. Method of Payment of Fees

 X One check in the amount of \$3,594.00

_____ Charge Account No. 10-1202 in the amount of \$_____. A duplicate of this
transmittal is attached.

15. Authorization to Charge Additional Fees

 X The Commissioner is hereby authorized to charge the following additional
fees by this paper and during the entire pendency of this application to
Account No. 10-1202:

 X 37 CFR 1.16(a), (f) or (g) (filing fees)
 X 37 CFR 1.16(b), (c) and (d) (presentation of extra claims)
 X 37 CFR 1.16(e) (surcharge for filing the basic filing fee
and/or declaration on a date later than the filing date of the
application)
 X 37 CFR 1.17 (application processing fees)
_____ 37 CFR 1.18 (issue fee at or before mailing of Notice of
Allowance, pursuant to 37 CFR 1.311(b))

16. Instructions As To Overpayment

_____ credit Account No. 10-1202
 X refund

Date: December 2, 1999

Respectfully requested,

By: Sandra B. Weiss
Sandra B. Weiss
Attorney for Applicant
Reg. No. 30,814
JONES, DAY, REAVIS & POGUE
77 West Wacker Drive
Chicago, Illinois 60601-1692
(312) 782-3939

CERTIFICATE OF MAILING (37 CFR 1.8a)

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date December 2, 1999 in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number E1245532923US addressed to the: Commissioner of Patents and Trademarks, Box Patent Application, Washington, D.C. 20231.

Date: 12/2/99

Paulette Haseltine

Jacqueline Roselloni
(Signature of person mailing paper)

ADDED PAGES FOR NEW TRANSMITTAL WHERE BENEFIT OF
PRIOR U.S. APPLICATION(S) CLAIMED

17. Relate Back - 35 U.S.C. 120

 X Amend the Specification by inserting the first line the sentence:

"This is a

 continuation

 continuation-in-part

 X divisional

of copending application(s)

 X U.S. serial number 08/655,595 filed on May 30, 1996.

 International Application filed on and which designated
the U.S."

18. Further Inventorship Statement Where Benefit of Prior Application(s) Claimed

 X This application discloses and claims additional disclosure by incorporation and a new
declaration or oath is being filed. With respect to the prior application the inventor(s) in
this application are

 X the same

 the following inventor(s) have been added

The inventorship for all the claims in this application are

 X the same

 not the same, and an explanation, including the ownership of the
various claims at the time of the last claimed invention was made

 is submitted

 will be submitted.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:) Examiner:
HEENAN, Sidney A., et al.) Group Art Unit:
Serial No.:)
Filed: (herewith))
For: RETOREFLECTIVE ARTICLES)
HAVING MICROCUBES, AND)
TOOLS AND METHODS FOR)
FORMING MICROCUBES)

PRELIMINARY AMENDMENT

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

Dear Sir:

Prior to substantive examination of this application, please amend the
specification as follows:

IN THE SPECIFICATION:

At page 16, for the definition that starts with "Contiguous microcubes", please
add the following sentence to the end of that definition -- An array of contiguous microcubes is
one in which the non-dihedral face edges of each microcube (except those at the perimeter of the
array) are coincident with non-dihedral face edges of another microcube.--

At page 17, line 6, delete "or dihedral angles" and insert therefor -- space --.

At page 19, the paragraph starting with "Microcube", insert a period "." after the
indication (1mm²), and delete the rest of that paragraph.

At page 20, line 2, delete "usually".

At page 40, at line 14 (the end of the second full paragraph on the page), insert --
The entrance plane is assumed to be parallel to a symmetry plane of the cube corners. --.

At page 52, line 8, delete "for" and insert therefor -- of --.

At page 53, rewrite Equation I as

EQUATION I:
$$\text{cant} = \cos^{-1} \left\{ \frac{1}{\sqrt{3AB}} \left[1 + \left(\sqrt{A} + \sqrt{B} \right) \sqrt{\frac{AB - 1}{A + B}} \right] \right\}$$

At page 60, line 20, delete "9°" and insert therefor -- -9° --.

At page 60, line 2419 - page 61, line 1, delete "equal to the cube axis cant, CAC, plus 35.26° (in this example at an angle, X, equal to 9° plus 35.26°, or 44.26°);" and insert therefor -- equal to 35.26° less the cube axis cant (hereinafter "CAC"), (in this example at an angle X, equal to 35.26° - (-9°), or 44.26°); --.

At page 61, line 3, after "face" insert -- 113 --.

At page 61, line 5, delete "plus" and insert -- minus --.

At page 61, line 10, delete "9°" and insert therefor -- -9° --.

At page 61, line 12, delete "9°" and insert therefor -- -9° --.

It is respectfully requested that the foregoing amendments be entered and this application be given prompt consideration on its merits.

Respectfully submitted,



Sandra B. Weiss
Reg. No. 30,814
JONES, DAY, REAVIS & POGUE
77 West Wacker
Chicago, Illinois 60601-1692
(312) 782-3939

項目	単位	数値	単位	数値
1. 総人口	人	1,234,567	2. 男性人口	612,345
3. 女性人口	人	622,222	4. 0歳人口	12,345
5. 1歳人口	人	11,234	6. 2歳人口	10,123
7. 3歳人口	人	9,012	8. 4歳人口	8,901
9. 5歳人口	人	7,890	10. 6歳人口	6,789
11. 7歳人口	人	5,678	12. 8歳人口	4,567
13. 9歳人口	人	3,456	14. 10歳人口	2,345
15. 11歳人口	人	1,234	16. 12歳人口	1,123
17. 13歳人口	人	1,012	18. 14歳人口	901
19. 15歳人口	人	890	20. 16歳人口	789
21. 17歳人口	人	678	22. 18歳人口	567
23. 19歳人口	人	456	24. 20歳人口	345
25. 21歳人口	人	234	26. 22歳人口	123
27. 23歳人口	人	112	28. 24歳人口	101
29. 25歳人口	人	90	30. 26歳人口	89
31. 27歳人口	人	78	32. 28歳人口	67
33. 29歳人口	人	56	34. 30歳人口	45
35. 31歳人口	人	34	36. 32歳人口	23
37. 33歳人口	人	12	38. 34歳人口	11
39. 35歳人口	人	10	40. 36歳人口	9
41. 37歳人口	人	8	42. 38歳人口	7
43. 39歳人口	人	6	44. 40歳人口	5
45. 41歳人口	人	4	46. 42歳人口	3
47. 43歳人口	人	2	48. 44歳人口	1
49. 45歳人口	人	1	50. 46歳人口	1
51. 47歳人口	人	1	52. 48歳人口	1
53. 49歳人口	人	1	54. 50歳人口	1
55. 51歳人口	人	1	56. 52歳人口	1
57. 53歳人口	人	1	58. 54歳人口	1
59. 55歳人口	人	1	60. 56歳人口	1
61. 57歳人口	人	1	62. 58歳人口	1
63. 59歳人口	人	1	64. 60歳人口	1
65. 61歳人口	人	1	66. 62歳人口	1
67. 63歳人口	人	1	68. 64歳人口	1
69. 65歳人口	人	1	70. 66歳人口	1
71. 67歳人口	人	1	72. 68歳人口	1
73. 69歳人口	人	1	74. 70歳人口	1
75. 71歳人口	人	1	76. 72歳人口	1
77. 73歳人口	人	1	78. 74歳人口	1
79. 75歳人口	人	1	80. 76歳人口	1
81. 77歳人口	人	1	82. 78歳人口	1
83. 79歳人口	人	1	84. 80歳人口	1
85. 81歳人口	人	1	86. 82歳人口	1
87. 83歳人口	人	1	88. 84歳人口	1
89. 85歳人口	人	1	90. 86歳人口	1
91. 87歳人口	人	1	92. 88歳人口	1
93. 89歳人口	人	1	94. 90歳人口	1
95. 91歳人口	人	1	96. 92歳人口	1
97. 93歳人口	人	1	98. 94歳人口	1
99. 95歳人口	人	1	100. 96歳人口	1
101. 97歳人口	人	1	102. 98歳人口	1
103. 99歳人口	人	1	104. 100歳人口	1
105. 101歳人口	人	1	106. 102歳人口	1
107. 103歳人口	人	1	108. 104歳人口	1
109. 105歳人口	人	1	110. 106歳人口	1
111. 107歳人口	人	1	112. 108歳人口	1
113. 109歳人口	人	1	114. 110歳人口	1
115. 111歳人口	人	1	116. 112歳人口	1
117. 113歳人口	人	1	118. 114歳人口	1
119. 115歳人口	人	1	120. 116歳人口	1
121. 117歳人口	人	1	122. 118歳人口	1
123. 119歳人口	人	1	124. 120歳人口	1
125. 121歳人口	人	1	126. 122歳人口	1
127. 123歳人口	人	1	128. 124歳人口	1
129. 125歳人口	人	1	130. 126歳人口	1
131. 127歳人口	人	1	132. 128歳人口	1
133. 129歳人口	人	1	134. 130歳人口	1
135. 131歳人口	人	1	136. 132歳人口	1
137. 133歳人口	人	1	138. 134歳人口	1
139. 135歳人口	人	1	140. 136歳人口	1
141. 137歳人口	人	1	142. 138歳人口	1
143. 139歳人口	人	1	144. 140歳人口	1
145. 141歳人口	人	1	146. 142歳人口	1
147. 143歳人口	人	1	148. 144歳人口	1
149. 145歳人口	人	1	150. 146歳人口	1
151. 147歳人口	人	1	152. 148歳人口	1
153. 149歳人口	人	1	154. 150歳人口	1

COUZIN, Dennis I.
1021 Ashland Avenue
Evanston, Illinois 60202

RETROREFLECTIVE ARTICLES HAVING MICROCUBES, AND TOOLS AND METHODS FOR FORMING MICROCUBES

BACKGROUND OF THE INVENTION

This invention relates to tools for making microcube retroreflective elements for use in manufacturing retroreflective articles, and in particular, retroreflective sheeting; to articles and sheeting having microcubes; and to methods of making such tools and articles. This invention further relates to tools, articles, and methods wherein said microcubes may have boundary shapes other than triangular.

Microcube retroreflective sheeting is now well-known as a material for making reflective highway signs, safety reflectors, reflective vests and other garments, and other safety-related items. Such retroreflective sheeting typically comprises a layer of a clear resin, such as for example, an acrylic or polycarbonate or vinyl, having a smooth front surface and a plurality of retroreflective microcube elements on the reverse surface. Light incident on the smooth front surface passes through the sheeting, impinges on the retroreflective elements, and is reflected back out through the smooth front surface in a direction nominally 180° to the direction of incidence.

The reverse surface of the resin layer bearing the microcubes may be further provided with additional layers, such as metallization, which enhances the entrance angularity of

the sheeting, or hydrophobic silica, adhesives, release liners, or other layers which otherwise contribute to the functionality of the sheeting.

Cube corner retroreflectors have been used on automobiles and for highway markings since the early 1900's. These prior art devices were based on macrocube corner elements made by the pin making art. From the use of macrocubes, a number of optical principles involving cube corner technology have been published, and some have been patented. Generally, these principles have involved changes in the size, shape or tilt of the cube faces, or of the included dihedral angles between faces, to achieve desired retroreflector performance. These known optical principles have included:

increasing the efficiency of the retroreflector at large observation angles by changing one or more of the three dihedral angles of the cube, as taught in U.S. Heenan 3,833,285;

increasing the efficiency of the retroreflector at large incident angles by inclining the cube axis with respect to the normal (often called "angled reflex"), taught, for example, in Leray patents U.S. 2,055,298 and Br. 423,464, and in U.S. Heenan 3,332,327;

increasing entrance angularity in one or more planes by including in the array cubes with cube axis cant, as taught in U.S. Heenan 3,873,184 and U.S. Heenan 3,923,378, and, in particular, by positioning one face of each of the oppositely oriented cubes more parallel to the front face of the reflector, as taught in U.S.

Heenan et al 3,541,606 to increase entrance angularity in two planes at right angles to each other;

increasing uniformity of retroreflectance versus orientation by rotating some cubes by varying degrees about a normal to the front surface of the article, and also by assembling them in arrays of variant dispositions, as in Uding Canadian Pat. No. 785,139; and by angling the cube axis in combination with multiple rotations, as in U.S. 3,923,378.

While these retroreflective optic design principles are well-known in the cube corner art, in more recent years some have attempted to patent them again in microcube sheeting technology, apparently because those persons either did not know what was done in prior macrocube technology, or chose either to ignore or to limit the applicability of the prior art teachings when applied to microcube retroreflective sheeting.

Prior to applicants' present invention, virtually all microcube sheeting has been limited to the use of microcubes made by ruling along parallel planes. This limitation is a result of the microcube dimensions being smaller than the dimensions obtainable by the cutting, polishing and lapping techniques used in the pin making art. The need to use traditional ruling techniques has inhibited the application of known optical principles to microcubes, and has, with one exception, further generally limited percent active aperture to less than 100%.

The present invention is a major advance in microcube sheeting technology. It enhances both the applicability to microcubes of prior known retroreflective optic principles and

the manufacturability of microcubes of different base configurations. Before detailing these advances, further background information is provided.

Retroreflective sheeting and methods of forming the microcube retroreflective elements in such sheeting are disclosed, for example in U.S. Pricone et al. 4,486,363, assigned to the common assignee herein, and incorporated herein by reference in its entirety. As disclosed in such patent, the resinous layer of the sheeting may be on the order of 0.01 inch (.25 mm) thick or less, and the retroreflective elements formed in the reverse face of the resinous layer comprise triangular microcubes such as are known in the manufacture of flexible retroreflective sheeting.

To manufacture such microcube sheeting, generally a master plate of retroreflective triangular microcubes is made by ruling a pattern of retroreflective cube corners into a planar surface of the plate. This is taught generally by Stamm U.S. 3,712,706; is mentioned in U.S. 5,122,902; and is also taught in detail in U.S. 4,478,769, assigned to the applicants' assignee and incorporated herein by reference in its entirety.

As shown in FIGS. 1A, 2 and 3 of the '769 patent, the planar surface of a master plate is ruled with a diamond tool which cuts a series of precise parallel V-shaped grooves. To rule equilateral triangular microcubes, three sets of parallel grooves intersecting one another at angles of 60° are made; each groove also will have an included angle of substantially 70.53° , and will be ruled to a groove depth determined by the height of the microcubes desired. This automatically results in an array of oppositely oriented pairs of equilateral triangular microcubes on the face of the master.

The ruled master may then be used to make a series of duplicates, such as by electroforming, and the duplicates are assembled together to form a single "mother" tool. The assembled "mother" tool is used to electroform molds, which are then assembled and ultimately used to form a tool capable of providing the microcube retroreflective elements on the sheeting, such as by embossing, casting, or other means known in the art. A continuous embossing method is disclosed in the aforementioned U.S. 4,478,769; a casting technique for forming microcubes is disclosed, for example, in U.S. Rowland 3,684,348 and 3,689,346.

As will be described hereafter, triangular microcubes having bases other than equilateral triangles have been used in an effort to achieve enhanced entrance angularity by use of the well known optical principles taught in macrocube technology. Thus, as taught in applicants' assignee's commonly assigned patent Montalbano U.S. No. 4,633,567, variations of the triangular microcube may be achieved by changing the tool ruling angles (thus, canting the cube axis), thereby adopting and applying some of the prior optical principles to microcube technology. For example, it is possible to achieve arrays having different entrance angularity or orientation angularity (c.f. Rowland U.S. Patent No. 3,684,348, col. 10, 11. 1-18 and Montalbano U.S. Patent No. 4,633,567, col. 6, 11. 4-36)

As previously noted, U.S. 3,833,285, discloses that the observation angularity of cube corner retroreflection can be increased in one plane by increasing (or decreasing) one of the three dihedral angles of the cubes; U.S. 3,873,184 and 3,923,378, disclose an array of retroreflective elements wherein the cube axes of neighboring cubes are inclined with respect to each other and oppositely oriented such that the entrance angularity is increased; U.S. 3,541,606 discloses that if one cube face of each of the oppositely oriented cubes is "more parallel" to the

front surface, entrance angularity is increased in two planes at right angles to each other. Each of the foregoing patents is incorporated herein by reference.

The identical optical principles used in macrocubes for enhancing retroreflectivity have also been applied to the triangular micro-sized cubes such as are used in retroreflective sheeting. Thus, U.S. 4,588,258 to Hoopman discloses a retroreflective article with purportedly novel wide angularity wherein an array of triangular microcube elements comprises sets of matched pairs with the cube axes of the cubes in each pair being tilted toward one another; but this simply duplicates the face-more-parallel structure disclosed, for example, in applicants' assignee's prior U.S. 3,541,606, U.S. 3,923,378 or U.S. 3,873,184 patents. Moreover, the Hoopman matched pairs of triangles are inherent when ruling triangles, which at the time of Hoopman's application was the only technique used for manufacturing microcubes.

Similarly, U.S. 4,775,219 to Appeldorn, *et al.*, discloses a retroreflective article of modified observation angularity having an array of microcube retroreflective elements formed by three intersecting sets of parallel V-shaped grooves, wherein at least one of the sets includes, in a repeating pattern, at least two groove side angles that differ from one another. The Appeldorn article merely achieves, in an obvious manner, the identical principle taught years ago in applicants' commonly assigned U.S. Patent 3,833,285.

However, all triangular cubes, while providing adequate retroreflectance, suffer the known disadvantage that inherently by their geometry no more than 66% of their area can be retroreflective for any particular incidence angle. In an attempt to overcome this deficiency of triangular cubes, the Minnesota Mining and Manufacturing Company, in a series of published

PCT applications (WO 95/11463; WO 95/11465; WO 95/11467; WO 95/11470), has disclosed arrays of microcubes including some non-triangular cubes, and techniques for ruling such arrays. However, the disclosed arrays have cubes of greatly different heights (which may pose manufacturing problems) and greatly varying aperture size (affecting diffraction and impacting on retroreflectivity). At best, the disclosed arrays provide calculated percent effective aperture (at 0° incidence) of 91%, which appears to fall to about 87% when manufacturing draft is considered (see, e.g., WO 95/11470, FIG. 12). If the cubes are canted by the disclosed ruling technique, the efficiency drops even further. The very nature of forming these cubes by intersecting ruled grooves parallel to a single plane inherently limits the results which can be obtained.

The advantages of the techniques and articles of the present invention, as compared to those obtained by the earlier, triangular microcubes or even by the more recent ruled mixtures of triangular and non-triangular cubes, are shown in the drawings of this application and are more specifically described hereinafter.

Unlike triangular cube corners, hexagonal and rectangular cube corners have the advantage that 100% of their area can be retroreflective even at large incidence angles. Also unlike triangular microcubes, however, hexagonal and rectangular microcubes are not defined by continuous straight lines that extend along a planar surface, and therefore cannot be ruled with intersecting sets of parallel lines all parallel to a common plane. Thus, with the sole exception of the rectangular cubes disclosed in U.S. Nos. 4,349,598 and 4,895,428 (wherein one of the active cube faces is perpendicular to the reflector front surface) it is not possible to cut or rule a master containing all hexagonal or all rectangular microcubes by ruling straight lines in a single flat

surface. Moreover, because of the geometric limitations inherent in ruling the cubes for the U.S. 4,349,598 and U.S. 4,895,428 patents, the cube structures disclosed therein are not useful where the primary light source will generally be at a near-zero incidence angle, such as in highway sign sheeting.

5

Processes for making tools having macrocubes are known in the prior art. Such tools are typically made by assembling a cluster of metal pins, each pin having a single cube corner machined and polished on one end. Hexagonal pins typically may have a dimension across parallel flats on the order of about 0.10 inch (2.5 mm). Rectangular pins have a short dimension of about .070 inch (1.8 mm) and a long dimension of about .120 inch (3.0 mm). A cluster of such pins is then used as a master to electroform a mold. These larger cubes, because of their height, are too large for use in the manufacture of thin flexible retroreflective sheeting requiring microcubes, but do find utility where larger (and thus taller) retroreflective elements are acceptable, such as in molded plastic reflectors for roadway markers, automobile taillights, and the like.

10
15
20

Because of manufacturing limitations, the smallest pin known to applicants has a cube shape about .040" square. Microcubes as used in flexible retroreflective sheeting generally are no greater than about .016 inch (0.4 mm) on a side, and in applicants' assignee's commercial sheeting products, the longest edge of the cube shape is about .010 inches (.25 mm).

20

The term microcube (or a cube of small dimensions), has been used in patents of others to describe or claim sheeting products produced from tools made directly or indirectly

from ruled masters, as opposed to retroreflector articles comprising macrocubes typically formed by grouping pins (or by other techniques used to form the larger cubes).

For tooling hexagonal cubes, an alternative to the "pin cluster" manufacturing technique is shown in Applied Optics, Vol. 20, No. 6, p. 1268, 15 April 1981. It is there stated that one way to achieve hexagonal cube corners is to accurately machine and polish grooves in the edge surfaces of a stack of flat plates and to assemble the plates at a desired angle. The reference shows a photograph of several flat plates with grooves cut in one edge, stacked one atop the other and with adjacent plates shifted with respect to one another so that the grooves are offset. The tilted stack of plates so assembled results in a set of hexagonal cubes which may be used as a master for electroforming molds. However, this technique was disclosed decades earlier by applicants' assignee's founder and was stated to be an unsatisfactory technique for tooling retroreflectors, see U.S. 1,591,572 (FIG. 16, p. 5, 11. 85-99).

Heretofore, the above-described "stacked plates" method of forming macrocubes was not of practical interest for producing molds for retroreflective products on a commercial scale. First, the molds for macrocubes could be made satisfactorily by the aforementioned clustering of hexagonal pins. Secondly, as observed in U.S. 1,591,572, by using conventional machining and polishing techniques, it was not possible to cut and polish inside-intersecting faces with the precise angular tolerances and sharp edges achievable with the pin technique. In particular, any irregularities in the cube surfaces as might be caused by either the cutting operation or the polishing operation could disadvantageously increase the divergence of the retroreflected light and thus diminish the effective retroreflectivity of the cubes so formed. This recognized difficulty in polishing grooved internal angles is highly exacerbated with microcubes

because the area that cannot be polished flat is a relatively greater percentage of the resulting cube face area.

As part of the present application, applicants disclose a technique for making and using thin plates that can be ruled without the need of polishing and that can be assembled in various ways to achieve microcube elements not previously available.

It is an object of the present invention to provide an array of microcubes which cannot be produced by ruling in one plane.

It is a further object of the invention to provide an array of microcubes in which the non-dihedral face-edges are not all parallel to a common plane.

It is still another object of the invention to provide means for interrelating three constructional parameters defining a hexagonal microcube (i.e., slippage, groove depth, and plate thickness, explained infra), by which the desired optical characteristics of the microcube can be optimized.

It is still another object of the invention to provide a retroreflective article and, in particular, retroreflective sheeting, having a pattern of hexagonal retroreflective microcubes having desired retroreflective characteristics.

It is another object of the instant invention to provide a method of making a tool including two or more contiguous hexagonal microcubes, which tool can be used for making a retroreflective article and, in particular, retroreflective sheeting.

5 It is still another object of the invention to provide a method of making a tool having a pattern of all hexagonal microcubes, which tool is made in part by ruling a set of grooves into the ends of a set of plates and then assembling the plates so as to define an array of hexagonal microcubes having desired retroreflective characteristics.

10 It is yet another object of the invention to provide an article having hexagonal microcubes wherein all of the cube faces are pentagonal; to provide a tool for making such an article; and to provide methods for making such an article and such a tool.

15 It is yet another object of the invention to provide a retroreflective article and, in particular, retroreflective sheeting, having rectangular retroreflective microcubes in which no dihedral face-edges of one cube are collinear with those of another cube, and in particular, such an article in which the microcubes provide desired retroreflective characteristics.

20 It is another object of the invention to provide a tool having a unique pattern of rectangular microcubes in which cube axis cant is not constrained by the need for collinearity of dihedral face-edges of adjacent cubes, which tool can be used for making a retroreflective article and, in particular, retroreflective sheeting.

It is another object of the instant invention to provide a method of making a tool having a pattern of rectangular microcubes in which dihedral face-edges are not collinear, which tool can be used for making a retroreflective article having rectangular microcubes, such as sheeting.

5

It is still another object of the invention to provide a method of making a tool having a pattern of rectangular microcubes, which tool is made in part by ruling grooves and bevels into plate ends to provide a desired rectangular cube shape and pattern.

10

It is also an object of the invention to provide a method of making rectangular microcube tools by means of assembling flat plates, on one end of which the rectangular microcubes have been formed.

15

It is still another object of the invention to provide an article having a pattern of retroreflective square microcubes, wherein the microcubes in a square set of four cubes have cube axes canted in four different directions.

20

It is yet another object of the invention to provide an article having a pattern of retroreflective pentagonal microcubes; to provide a tool for making such an article; and to provide methods for making such an article and such a tool.

It is still another object of the invention to provide an article having a pattern of pentagonal microcubes with canted cube axes, and such an article having pentagonal microcubes

with differently canted cube axes, and tools for making such articles and methods for making such tools and articles.

Still a further object of the invention is to provide a retroreflective article having one or more triangular microcubes in which the cube shape and the position of the projection of the cube apex within the cube shape are independent of the cube axis cant.

Yet a further object is to provide such a retroreflective article in which adjacent triangular microcubes may have different degrees of inclination of the cube axes and are not necessarily matched pairs.

Other objects, advantages, and novel features of the instant invention will be understood by those skilled in the art from the following specification and the drawings appended hereto.

SUMMARY OF THE INVENTION

In accordance with the invention, methods are disclosed for making a tool having a pattern of microcubes for use in making a retroreflective article. A plurality of plates is provided, each plate having two substantially parallel planar surfaces and at least one end made of a material that can be cut by a cutting tool that will produce an optical surface, as cut. The plate has a micro-sized thickness " t ", i.e., on the order of about one or two microcube widths, depending upon the type of microcube-corner to be tooled. The thickness need not be the same for all plates.

Many shapes of microcubes are manufacturable using the plate process disclosed herein. Two shapes, hexagonal and rectangular, are discussed in detail; other shapes are described more generally to illustrate the versatility of the process.

Hexagonal microcubes

To produce a pattern of hexagonal microcubes, the plates are stacked one against another so that the set of ends of cuttable material lies substantially in a single plane, which, in a preferred form, is substantially perpendicular to the parallel planar surfaces of each plate. A series of parallel V-shaped grooves is ruled with a cutting tool into the set of cuttable ends. The ruled grooves preferably have polished surfaces as cut and therefore do not require subsequent lapping and polishing as do pins used in making macrocubes.

In one embodiment of the invention, the direction of cutting the grooves is nominally perpendicular to the planar surfaces of the plates, the length "L" of each inclined surface of the groove perpendicular to the direction of cutting is chosen to be equal to the thickness "t" of the plate, and the included angle between the inclined surfaces is about 90° ; the included angle may be varied from 90° by tilting the cutting face of the cutting tool with respect to the surface being cut.

The grooved plates are then offset from one another by half a groove width horizontally and possibly, but not necessarily, by the depth "d" of one groove vertically, so that the top edge of a groove in one plate coincides with the bottom edge of a ruled groove in the adjacent plate, thus creating two superimposed arrays of hexagonal cube corners. One array consists of female (concave) hexagonal cube corners, each comprised of the exposed planar

surface of one plate plus the two surfaces of one groove of the next adjacent plate. The other array consists of male (convex) hexagonal cube corners, each comprised of the exposed planar surface of one plate plus two adjacent surfaces from adjacent grooves in that same plate. For greater accuracy in the eventual retroreflective article, the male cube corners are preferred, because they avoid any plate-to-plate angular errors.

Rectangular microcubes

To produce a pattern of rectangular microcubes, in one embodiment, plates of a chosen thickness "t" are stacked alternately with slightly shorter spacers. The assembly of plates and spacers is tilted at a predetermined preferred angle, with one set of edges of the cuttable ends lying in a plane parallel to the bed of the ruling machine. The cuttable end of each plate is then bevel cut by means of a cutting tool so that the beveled face is perpendicular to the bed of the ruling machine. A series of grooves of desired included angle is then cut by the cutting tool in a direction substantially perpendicular to the beveled face. To create an electroforming master comprising rectangular microcubes, the spacers are removed and the plates are then stacked together with adjoining plates rotated 180° with respect to each other with the apices of the rectangular cube-corners all lying in the same plane perpendicular to the plane of the sides of the plates and with the apices of cubes in adjoining plates aligned parallel to the grooves.

Manufacture of Article

The stack of grooved plates (for hexagonal cubes) or grooved and beveled plates (for rectangular cubes) may then be used as a master for electroforming a mold insert or for initiating a mothering process to electroform a larger mold insert or an embossing belt, as shown in patent U.S. 4,478,769 for the manufacture of retroreflective articles and, in particular,

retroreflective sheeting, but now having a pattern of hexagonal or rectangular microcubes. The use of hexagonal or rectangular microcubes instead of triangular microcubes advantageously increases the active aperture of the article as projected parallel to the principal refracted ray from 66% or less to essentially 100%.

5

GLOSSARY OF TERMS

For purposes of this application, Applicants are using certain terms in a particular sense, as defined herein, and other terms in accordance with industry accepted practice, such as current ASTM definitions. Note that many of these definitions distinguish between a cube and a cube shape, each of which is defined herein.

100

Adjacent -- for microcubes, having a portion of an edge of the shape of one cube essentially coincident with a portion of an edge of the shape of another cube.

150

Angle of incidence -- the angle between the illumination axis and the normal to the front surface of a retroreflector. See also "entrance angle."

Array active aperture -- the sum of the active apertures of the individual microcube elements making up the array. (See also "percent active aperture")

20

Contiguous microcubes -- microcubes, a non-dihedral face-edge of one of which is coincident with a non-dihedral face-edge of another microcube. **Compare**, "adjacent cubes." Note that non-contiguous microcubes may be adjacent.

Cube (also "cube corner") -- an element consisting of three nominally perpendicular faces, regardless of the size or shape of the faces; often referred to in industry and literature as "corner cubes", "trihedrals" or "tetrahedrons".

5 Cube area -- the area enclosed by the cube shape.

Cube axis -- a central axis that is the trisector of the internal or dihedral angles defined by the three intersecting faces of a microcube. In the art, sometimes called the "symmetry axis."

10 Cube axis cant -- the angle between the cube axis and the principal refracted ray. The sign of the cant is negative for face-more-parallel and positive for edge-more-parallel. A cube is considered canted when the cube axis cant is not zero.

15 Cube diagonal -- for certain cube corners, an imaginary line passing through the apex of the cube corner at an angle such that in a projection of the outline of the cube corner parallel to the cube diagonal, every line through the apex terminating on both ends at the cube shape will be bisected by the apex.

20 Cube perimeter -- closed spatial curve comprising the non-dihedral edges of the faces of a cube. In instances where there is an uninterrupted surface shared by two or more microcubes, the dividing lines between microcubes shall be considered to be the shortest lines that can be drawn to complete the polygon (see e.g. FIG. 27B).

Cube shape -- the two-dimensional geometrical figure defined by the projection of the cube perimeter in the direction of the principal refracted ray. Thus, a triangular cube has a cube shape that is a triangle, a hexagonal cube has a cube shape that is a hexagon, and so forth.

5 Cube symmetry plane -- a plane that divides a cube corner into mirror images.
Not all cube corners have a plane of symmetry.

Design ray -- an imaginary line through the cube apex in a tool, which ray is coincident with the principal refracted ray in the article.

10 Dihedral face-edge -- intersection of two faces of a single cube.

Entrance angle -- the angle between the illumination axis and the optical axis (retroreflector axis). Note the distinction between entrance angle and angle of incidence. The
15 angle of incidence is always measured between the incident ray and the normal to the surface (which may or may not be the retroreflector axis), whereas the entrance angle is measured between the incident ray and the retroreflector axis (which may or may not be the normal to the surface). Entrance angle is a measure only of the amount by which an incident ray is angled to the retroreflector axis, and is not concerned with the normal; angle of incidence is a measure only
20 of the amount by which an incident ray is angled to the normal, and is not concerned with the retroreflector axis. For example, a pavement marker may be designed for the normal to the marker surface to be angled 60° to the optical axis; if light from an approaching vehicle is incident upon that marker along the retroreflector axis, the entrance angle is 0° and the angle of incidence is 60° , if light from an approaching vehicle is incident on the marker at a horizontal

angle of 20° with respect to the retroreflector axis, the entrance angle is 20° and the angle of incidence is $61.98^\circ = [\cos^{-1}(\cos 60)(\cos 20)]$.

"Face-more-parallel" and "edge-more-parallel" refer to the positioning of the cube relative to the principal refracted ray. When the angles between the cube faces and the principal refracted ray are not all equal to 35.26° , the cube is "face-more-parallel" or "edge-more-parallel" depending upon whether the face angle with respect to the principal refracted ray that is most different from 35.26° is respectively greater or less than 35.26° . In the case of sheeting or other retroreflectors for which the principal refracted ray is nominally perpendicular to the front surface of the retroreflector, then for face-more-parallel microcubes the selected cube face will also be more parallel to the reflector front surface than will any face of an uncanted microcube.

Horizontal entrance angle -- for pavement markers, the angle in the horizontal plane between the direction of incident light and the retroreflector axis.

Incidence angle -- see, "angle of incidence."

Microcube (also "microcube corner") -- a cube corner having a maximum area of about 0.0016 square inches (1mm^2) (which corresponds to a cube height for square base cube of about 0.040" (1.0 mm)) or less.

Non-dihedral face-edge -- edge of a microcube face that is not a dihedral face-edge, i.e., an edge that is a segment of the cube perimeter.

Optical axis -- a designated line segment from the retroreflector center that is usually chosen centrally among the intended directions of illumination, such as the direction of the road on which or with respect to which the retroreflector is intended to be mounted.

5 Paired -- oppositely oriented. Paired cubes, as used herein, refers to oppositely oriented adjacent cubes. Paired arrays, as used herein, refers to two arrays, the cubes in one array being oppositely oriented to the cubes of the other.

10 Percent active aperture -- that portion of the projected area of an array that is retroreflectively functional for a particular selected direction of projection. (This definition assumes that the rear surfaces of the cube are 100% reflective. This definition is equivalent to that used in WO 95/11470, page 6, lines 23-25.)

15 Principal incident ray -- a light ray parallel to the optical axis, chosen so that after refraction at the article's front surface, the ray passes through the apex of the cube corner.

Principal refracted ray -- the continuation of the principal incident ray after refraction at the retroreflector front surface.

20 Retroreflectance -- the product of percent active aperture times each cube face's reflectivity times the square of the transmission (to account for Fresnel transmission loss) of the front surface. (This term differs from "total light return" as defined in WO95/11467, page 17, lines 26 and 27, by inclusion in "retroreflectance" of the Fresnel loss of the front surface.)

Photometrically, retroreflectance is the measure of the total retroreflection accumulated over all appropriately small observation angles and all rotation angles.

Retroreflector axis -- same as "optical axis."

5

Rulable -- capable of being generated by the repeated straight-line motion of a shaped tool along paths parallel to a common plane.

Zone of reflectorization -- the range of entrance angles in a given entrance plane throughout which the retroreflector maintains a given minimum retroreflectance.

10

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a steel block for forming electroless nickel plates used in the present invention;

15

FIG. 2A is a cross section of the block of FIG. 1 in the direction of the arrows 2-2 after deposition of an electroless nickel layer on the top surface of the block;

FIG. 2B is a cross section of the block of FIG. 1 and the electroless nickel deposit after machining one of the upper edges;

20

FIG. 2C is a cross section of the block with the electroless nickel plate separated and with electroless nickel residue remaining in one of the block undercuts;

FIG. 3 is a perspective view of a stack of electroless nickel plates before being ruled;

FIG. 3A is a view perpendicular to the face of one of the plates of FIG. 3 showing an arrangement of dowel holes used in one method of aligning plates for ruling and assembly of the electroform master.

FIG. 4 is a perspective view of the same stack of plates after being ruled with grooves;

FIG. 5 is a perspective view of the plates of FIG. 4 with adjacent plates offset by one groove depth in the vertical direction and one half groove width in the horizontal direction;

FIG. 6 is a side view of the stack of plates of FIG. 5 in the direction of the arrows 6-6 and in which "L" (as shown in FIG. 4) equals "t";

FIG. 6A is a view in the direction of the arrows 6A-6A of FIG. 6;

FIG. 6B is a view in the direction of the arrows 6B-6B of FIG. 6, with different shading added to emphasize the offset between adjacent plates;

FIG. 7A is a view of a portion of the front face of a cutting tool used to rule grooves in the plate ends in accordance with the instant invention, taken perpendicular to the face of the tool;

FIG. 7B is a view in the direction of the arrows 7B-7B of FIG. 7A and illustrates a side view of the cutting tool of FIG. 7A;

FIG. 8A is a view of a portion of the front face of the cutting tool as tilted for cutting a groove;

FIG. 8B is a side view of the cutting tool of FIG. 8A in the direction 8B-8B of FIG. 8A, showing the tilt, e , of the face of the tool and the direction of cutting;

FIG. 9 is a view of one complete groove as cut in a plate with included groove angle $C + \Delta C$ corresponding to the tilt, e , of the cutting tool;

FIG. 10 is a side view of stacked plates similar to FIG. 6, but in which "L" is greater than "t" and in which adjacent plates are offset by one groove depth d in the vertical direction and one-half groove width in the horizontal direction;

FIG. 10A is a view taken in the direction of the arrows 10A-10A in FIG. 10, which direction is along the diagonal of the cubes formed by the plates, which may also coincide with the principal refracted ray;

FIG. 10B is a view taken in the direction of the arrows 10B-10B in FIG. 10,
which direction is perpendicular to the plane passing through the cube apices;

FIG. 10C is a view taken perpendicular to the faces of the plates, in which
different shading has been added to emphasize the offset between adjacent plates;

FIG. 11 is a side view of a stack of plates about to be ruled with grooves but set at
an angle to the cutting plane, the angle being greatly exaggerated for the purpose of illustration;

FIG. 11A is a side view of the stack of plates of FIG. 11 after ruling and after
being offset with respect to adjacent plates by one groove depth in the vertical direction and one-
half groove width in the horizontal direction;

FIG. 11B is a view taken perpendicular to the plane of the face of the plate (along
the arrows 11B-11B in FIG. 11A) illustrating that the edges of the grooves are angled with
respect to the perpendicular to the face of the plate (only portions of the plates being differently
shaded for illustrative purposes);

FIG. 12 is a side view of a stack of plates with "L" equal to "t" as in FIG. 6, but
stacked with adjacent plates offset $1.64t$ vertically and $.707t$ horizontally;

FIG. 12A is a projection taken in the direction 12A-12A of FIG. 12, which
direction is parallel to the cube diagonal;

FIG. 12B is a frontal view of the plates of FIG. 12;

FIGS. 12C and 12D illustrate the interrelationship of various cube parameters for different incident rays;

5

FIG. 13 is a partial side view of an article comprising paired arrays of hexagonal microcubes formed from stacked plates similar to FIG. 12, in which $d=0.55t$ and $s=0.45t$ to provide 9.74° face-more-parallel microcubes;

10

FIGS. 14A and 14B are partial plan and side views respectively of a plate before machining rectangular cubes;

15

FIG. 15 is a schematic side view of a section of a stack of alternating plates and spacers tilted at angle X for machining a bevel face with a cutting tool;

FIGS. 16A and 16B are partial plan and side views respectively of the single plate of FIGS. 14A and 14B after machining of the bevel face;

20

FIG. 17 is a view similar to FIG. 15 of a section of a stack of alternating plates and spacers after machining the bevel faces, with the spaces between plates filled with plastic in preparation for machining grooves;

FIG. 18 is a view in the direction 18-18 on FIG. 17 of the stack of plates and spacers after partial machining of groove faces and showing a cutting tool moving toward the plane of the paper and machining the grooves (and the next groove to be cut in dashed lines);

FIG. 19 is a side view of the cross section of a single plate of FIG. 18 at arrows 19-19;

FIG. 20 is a plan view in the direction of arrows 20-20 in FIG. 19 of a single plate after machining of the bevel faces and groove faces and showing the rectangular outline of the microcube corners, a typical microcube being shown in the dashed circle in FIG. 20;

FIG. 21 is a plan view of a stack of three plates machined as in FIG. 20, assembled with adjacent plates oriented 180° to each other and ready for use as a master in electroforming, with a typical individual cube indicated by three dotted faces;

FIG. 22 is a partial side view of a double thickness plate used in an alternative inventive method of making rectangular microcubes, after cutting a bevel face perpendicular to the plane of the bed of the ruling machine, with the plates positioned at an angle ($90^\circ - X$) to that plane;

FIG. 22A is a view of the cutting tool as positioned for cutting the bevel face of FIG. 22;

FIG. 22B is a view in the direction of arrows 22B-22B of FIG. 22 showing the first bevel face and a temporary face machined in the plate end by the cutting tool;

FIG. 22C shows the first bevel face and the temporary face in FIG. 22 filled in preparation for cutting grooves;

FIG. 23 shows the plate of FIG. 22 during cutting of groove faces in a direction substantially perpendicular to the direction of the first bevel cut by means of a second cutting tool;

FIG. 23A is a cross section through FIG. 23 at arrows 23A-23A, at the root of the cut for the groove faces;

FIG. 23B is a view of FIG. 23A in the direction of arrows 23B-23B after cutting of the groove faces to form a first row of rectangular cubes, one of which is indicated by the dotted faces in the dashed circle;

FIG. 24 is the side view of the plate of FIG. 23A repositioned for cutting a second bevel face for a second row of cubes by means of the first cutting tool, which, in effect, removes the temporary face (as shown by dashed lines);

FIG. 25 shows a front view of the plate of FIG. 24 after cutting the second bevel face for the second row of cubes and during machining of new groove faces substantially perpendicular to the second bevel face;

FIG. 25A is a cross section in the direction of the arrows 25A-25A at the root of the cut for the groove faces of the second row of cubes;

FIG. 25B is a plan view of a finished plate ready for use as an electroforming master, taken in the direction 25B-25B of FIG. 25A and showing the bevel faces and groove faces of the second row of cubes, one such cube of the second row being indicated in the dashed circle;

FIG. 26 is a plan view of two square microcubes;

FIG. 27 is a frontal view of a plate for forming the square microcubes of FIG. 26, taken in the direction of cutting of the groove faces, in which the groove roots define a plane parallel to but offset above the intersection of the bevel faces;

FIG. 27A is a cross-section view in the direction of arrows 27A-27A of FIG. 27 taken through a groove root;

FIG. 27B is a view in the direction of arrows 27B-27B of FIG. 27A, depicting a finished plate for use as an electroform master;

FIG. 27C is another partial side view of an article similar to FIG. 13, but depicting an array of rectangular microcubes made in a manner similar to that of FIGS. 27 through 27B, but in which $H = 2W$, axes are canted, and apices are decentered;

FIG. 28 depicts rectangular cubes wherein three principal optical parameters (apex decentration, boundary proportion, and axis cant) have been modified for illustrative purposes; cube size is a fourth parameter, not illustrated here;

FIG. 29 illustrates an improved rectangular cube, with face-more-parallel when used, for example, in a pavement marker with a 55° incidence angle;

FIG. 29A is a projection of the cube of FIG. 29 parallel to the principal refracted ray;

FIG. 30 is an illustrative rear isometric view of an array of cubes of the type shown in the marker of FIG. 29;

FIG. 31 illustrates the tooling of triangular microcubes with bases not all parallel.

FIG. 32 depicts an array of square microcubes providing four orientations without slippage walls;

FIG. 33 is a plan view of a plate with a single row of square cubes of the type shown in FIG. 32, with the three cutting steps indicated;

FIGS. 34A and 34B are plan and side views respectively of a portion of a plate having rectangular microcubes with the bevel face ruled in a direction perpendicular to the front

face of the plate, as contrasted to the tooling method described in FIGS. 15-21, for which the bevel face was ruled in a direction parallel to the front face of the plate;

FIG. 35 illustrates in plan view an array of penta-face hexagonal cubes with the end of one plate highlighted;

FIG. 36 illustrates an array of pentagonal microcubes made pursuant to the plate technique of the present invention;

FIG. 36A illustrates two pentagonal microcubes with different cants;

FIG. 37 is a graph of a family of curves comparing retroreflectance of microcubes of various refractive indices versus incidence angle from -90° to $+90^\circ$, for an array of hexagonal microcubes where $d/t=.7071$, $s/t=0$, of the type depicted in FIGS. 6 through 6B;

FIG. 38 is a graph of a family of curves of retroreflectance versus incidence angle I from -90° to $+90^\circ$, for arrays of unpaired hexagonal microcubes having refractive index=1.49 where d/t is varied and $s/t=0$;

FIG. 39 is a graph of a family of curves of percent active aperture (instead of retroreflectance) versus incidence angle I from -90° to $+90^\circ$ for the same microcubes used for FIG. 38;

FIG. 40 is a graph comparing the efficiency of the paired arrays of hexagonal microcubes and paired rectangular microcubes of FIGS. 13 and 27C, at entrance angles from 0° to 70° , with efficiency being shown as both percent active aperture and also as retroreflectance;

FIG. 41 is a graph of curves of retroreflectance versus horizontal entrance angle for the improved inventive rectangular microcubes of FIGS. 29 and 30 as compared with rectangular microcubes of cube axis cant = 1.9° for which the non-quadrilateral face is perpendicular to the front surface of the reflector as in prior art devices;

FIGS. 42A through 42E depict a family of three curves of retroreflectance versus entrance angle from 0° to 70° for paired arrays of hexagonal microcubes of refractive index=1.59 for each of five cube axis cants compared with the retroreflectance of a triangular microcube retroreflective article of Hoopman U.S. 4,588,258;

FIG. 43 depicts curves of retroreflectance versus entrance angles from 0° to 60° in a plane perpendicular to the plane of symmetry of the cubes for paired canted rectangles and paired arrays of canted hexagons compared with identically canted Hoopman;

FIG. 44 is a graph showing percent active aperture versus entrance angles from -20° through 20° for paired rectangles and paired squares, both without cant, compared with arrays of microcubes from FIG. 12 of prior publication WO 95/11470.

FIG. 45 is a graph showing percent active aperture versus entrance angles from -
70° through 70° for paired canted rectangular microcubes and paired arrays of canted hexagonal
microcubes, compared with FIG. 32 of prior publication WO 95/11463.

5 FIGS. 46a-c show the effect of diffraction on the pattern of retroreflected light for
three different sizes of hexagonal microcubes.

10 These various figures, which are not to scale, are intended to be merely illustrative
and not limiting. The various graphs are similarly not limiting but are for demonstrative and
comparative purposes. Other graphs and examples will be apparent from the detailed
descriptions which follow.

DETAILED DESCRIPTION OF THE INVENTION

The inventive method of making microcubes uses the principle of ruling the ends of certain plates in a particular fashion and then assembling these plates in a particular combination to form an array of microcubes. An "array" as used in this patent application shall mean a repeating pattern of geometrical elements, including microcubes. Those skilled in the art will recognize that a retroreflective article having desired performance characteristics could be made from a composite of different arrays. For example, such an article could include different arrays each made by one or more techniques of the instant invention, or such an article could include a combination of arrays of the instant invention and arrays made by prior art machining methods. Means for combining different arrays in a single article are known to those skilled in the art, and retroreflective articles having a plurality of arrays, one or more of which is made in accordance with the instant invention, are considered to be within the scope of the instant application. In every instance where different arrays are combined, it shall be understood that the specification and claims are relevant to that array, or that portion of the array, that is made by the technique of the instant invention.

The various examples discussed hereinafter demonstrate the advances in this technology in their simplest form and also disclose specific embodiments in which improved retroreflector performance can be achieved in microcubes using the same optical principles as have been employed in macrocubes.

All embodiments of the invention require the use of plates, which differ somewhat for different types of microcubes. The plates are of micro-sized thickness, on the order of about 0.004-0.040 inches (0.1-1.00 mm). There are four basic types of plates. Plates 10, suitable for

the tooling of hexagonal microcubes with rectangular cube faces, have flat and parallel faces and, uniquely, one face of the plate becomes a face of the microcube, and therefore, must have a polished surface. Plates 110 and 210, suitable for tooling rectangular and triangular microcubes, have flat and parallel faces and in a preferred form, neither face of the plate becomes a face of the microcube. Plates 710 and 810, suitable for tooling the pentagonal microcubes of FIG. 36, have one flat face and one grooved face, neither of which becomes a face of the microcube. Plates suitable for tooling the hexagonal microcubes with pentagonal faces of FIG. 35, or for cutting two rows of pentagonal microcubes on one plate, are grooved on both sides, the groove spacing and groove angles being not necessarily the same for both sides.

Method of Making Plates

The plates must be of a material that cuts cleanly when ruled, such as with a diamond cutting tool as is known in the art. Electroless nickel is a particularly suitable material for the rutable plates used in the method of the instant invention.

Although the above-described plates may differ, the method of their manufacture can be generally illustrated by the method of making plates 10 used in the manufacture of hexagonal microcubes. For purposes of illustration, plate 10 can have dimensions of about 1.0" x 4.0" and a thickness "t" of about 0.010".

Referring to FIG. 1, a stainless steel block 601 is provided having a flat top surface 602 of about 1.0" x 4.0". Block 601 may be of grade 440C stainless. Grind and polish the surface 602 of block 601. Machine an undercut 603 on the two 0.75" by 4.0" side surfaces tapering from zero at the polished face 602 to 0.005" deep at 0.250" down from the polished face

602. Passivate the block 601 by immersion for 10 seconds in 30% nitric acid, for example, and deposit electroless nickel 604, FIG. 2A, on the polished top surface 602 of the stainless block to the thickness desired plus approximately 0.002", in this example to a total thickness above the block of 0.012" and also approximately 0.25" down the sides of the block.

Machine the 1.0" by 4.0" surface 609 of the electroless nickel 604 with a diamond tool to the desired thickness, in this example to 0.010". Machine the sides of the block with diamond to cut away electroless nickel at 605 (FIG. 2B) to the stainless at the top of the undercut, freeing the .010" thick electroless nickel plate 606 FIG. 2C to be separated from the stainless block. Clean out the undercuts in the block by picking out the loose wedge 607 FIG. 2C of electroless nickel in the undercut. Repeat the process to make as many plates 606 as may be required. In the steps that follow, the plates 606 will be identified as 10, 110 or 210 in the tooling of hexagonal, single rectangular or double rectangular microcubes, respectively.

In the tooling of hexagonal microcubes, a portion of the surface 608 FIG. 2C of the electroless nickel plate 606 that was against the polished surface of the stainless block will become one face of the cube corner. Alternatively, the approximately 1.0" by 4.0" surface 609 of the electroless nickel can be provided with an optical finish during the step of machining the plate to size with a diamond tool, in which instance, it will be unnecessary to polish the face of the stainless steel block. For the tooling of rectangular microcubes, it will be unnecessary to polish the face of the stainless steel block before electroforming because neither face of the plate becomes a face of a microcube.

Method of Making Hexagonal Microcubes

As shown in FIG. 3, the plates 10 are preferably flat and each has at least one flat end 12 that is cuttable, such as by a diamond cutting tool. The plates 10 are stacked together so that at least one set of ends 12 lies within a plane. It will be understood that the three plates shown in FIG. 3 are for clarity of the illustration, and that more than three plates can be included in a single stack. A series of V-grooves 14 are ruled into the set of ends 12. FIG. 4 shows the same stack of plates 10 but with the V-grooves 14 ruled into the straight ends 12. The grooves 14 are preferably substantially parallel to one another and substantially perpendicular to the front face of the stack of plates 10. The V-shaped grooves have an included angle of substantially 90° , with each groove being defined by two top edges or crests 20 and a bottom edge or root 21. For optimum efficiency, the grooves 14 are spaced from one another so that they are separated only by the top edges 20 of adjoining grooves; i.e., there are no substantial flat surfaces between the grooves 14.

FIGS. 7A and 7B are front and side views, respectively, of a portion of the cutting tool for ruling grooves, in which C is the angle between cutting edges viewed perpendicular to the front face of the tool. The angle C may be chosen to be smaller than the desired included groove angle, $C + \Delta C$ in FIG. 9, in order that fine adjustment of that groove angle may be made by tilting the tool by a relatively coarse amount "e" in FIG. 8B, where "e" is the angle at which the face of the cutting tool is tilted from a perpendicular to the direction of the cut such that

$$\text{Equation A: } e = \cos^{-1} [(\tan 0.5C)/\tan 0.5(C + \Delta C)]$$

FIG. 8A is a view of a portion of the front face of the cutting tool tilted by the amount "e" of FIG. 8B, in which $C + \Delta C$ is the angle between cutting edges viewed parallel to the direction of cutting. FIG. 9 shows the changed angle $C + \Delta C$ in the cut groove.

5 In order to define a pattern of hexagonal retro-reflective microcubes the grooved plates 10 may be offset one from another as shown in FIG. 5. Adjacent plates are offset from one another in the horizontal direction by a distance "a", which as shown in FIG. 5 is equal to one half the width of a groove. Adjacent plates are also offset from one another in the vertical direction by a distance "d", which as shown in FIG. 4 is equal to the depth of one groove. The manner in which the plates are offset from one another is also shown in FIG. 6B, wherein alternating plates are shaded differently for clarity. It will be understood that, throughout this specification, "vertical" shall designate a direction perpendicular to the plane of the roots of the grooves of a single plate, and "horizontal" shall designate a direction perpendicular to the vertical and in the plane of the plate.

15 With the plates offset in this manner, "male" microcubes are defined by the inclined walls of adjacent grooves which meet at a top edge 20 to form two faces 17 and 18 of the microcube, and the front surface of the same plate which forms the third face 19 of the microcube. It can be seen in FIG. 6A that all three faces 17, 18 and 19 of a single male cube (shown by dots) are formed on a single plate 10. Female microcubes may be formed by the two faces of a groove in one plate and the front surface of an adjacent plate. An advantage of the male microcube is that the accuracy of the angles between the faces of each microcube is dependent solely on the accuracy of the groove ruling operation, and not on the accuracy with which the plates are stacked and assembled in forming the "master". The "master" of stacked

and assembled plates may then be subjected to an electroforming procedure to make tools, as will be discussed in greater detail below.

The hexagonal outline of the cube corners produced by the method described above, and the quadrilateral outline of the cube faces, are both readily apparent in FIGS. 5 and 6A. In particular, it is evident in FIGS. 5 and 6A that the hexagonal cube corners are not defined by continuous straight lines which extend along the entire surface of the ruled master, as is the case with triangular cube corners, shown for example in FIG. 1A of the aforementioned patent U.S. 4,478,769. Therefore, it is apparent that a tool comprising only hexagonal microcube corners cannot be machined by ruling three sets of parallel grooves as described in the '769 patent.

In the embodiment of FIGS. 5 and 6, the length of the sides of the groove ("L" in FIGS. 4 and 6B) and the thickness of the plate ("t" in FIGS. 3 and 6) are equal and the direction of the ruling is perpendicular to the face of the plate 10. For this embodiment, the cube axis is perpendicular to the plane of the cube apices and the angle X in FIG. 6 is nominally 35.26° .

While in the foregoing example all the cube dihedral angles are equal and all the cube faces are identical, it is recognized in the art of cube corner retroreflectors that for some applications it may be desirable to alter various optical properties of the retroreflective article by making predetermined modifications to the cube angles and the relative sizes and shapes of the respective cube faces. Those modifications can be achieved using the methods of the instant invention. Thus, for example, the thickness of the plate "t" need not necessarily be equal to the length of the side of the groove "L", the crest of one groove need not be coincident with the root

of a groove in an adjacent plate, and the direction of ruling is not necessarily perpendicular to the face of the plate 10.

The inventive method as described allows the cube designer to control certain retroreflective properties of the resulting array of microcubes. For example, various angles of the principal incident ray can be accommodated by varying the depth of the groove relative to the thickness of the plates (FIG. 10), and/or by tilting the bisector of the groove so that the lengths of the two sides of a single groove are not the same (not illustrated) and/or by changing the offset of adjacent plates (FIG. 12). In another embodiment, the entrance angularity can be increased either in a plane perpendicular to the cube symmetry plane by canting the cube axis to face-more-parallel (FIGS. 41 and 43) or in a plane parallel to the cube symmetry plane by using oppositely oriented pairs with either face-more-parallel or edge-more-parallel cant (FIG. 42), or in multiple planes parallel to and perpendicular to the symmetry plane by combining oppositely oriented pairs with face-more-parallel cant (FIGS. 43 and 45). In yet another embodiment, the divergence of the retroreflected beam (i.e., the observation angularity) can be increased in one plane or in multiple planes by making the groove angle slightly greater or less than 90° and/or by making the path of the cutting tool slightly angled to the normal to the face of the plates, as illustrated by greatly exaggerated angle "b" in FIG. 11, where "b" equals the small angle between the cutting path and the normal to the front surface of the plate. In FIG. 11, angle "b" lies in a vertical plane, but it could, by other shifts of the plates, lie in any plane that includes the cutting path and the normal to the face of the plates. FIG. 11A shows the adjacent plates of FIG. 11 offset so that the crest of a groove in one plate is aligned with the root of a groove in an adjacent plate. The manner in which the plates are offset from one another is shown in FIG. 11B, wherein alternating

plates are shaded differently for clarity; FIG. 11B also shows that, because of the exaggerated cutting angle, faces 17 and 18 are visible even though the view is perpendicular to face 19.

Those skilled in the art will recognize that the above variations of the inventive method allowing for control of incidence angularity, entrance angularity, and observation angularity, are not necessarily mutually exclusive, and can be combined by one skilled in the art to produce an array having a desired combination of retroreflector performance characteristics.

Three constructional parameters determine the geometry and thus the entrance angularity of a regular assembly of identical grooved plates that produces an array of hexagon cube corners: plate thickness t ; groove depth d ; and plate slip s . (See FIGS. 12C and 12D.) Slip is the distance between the crests of one grooved plate and the roots of the next adjacent plate. For the assembly of FIG. 6, the slip $s = 0$; for the assembly of FIG. 12, the slip s does not equal 0.

Light incident on the front surface of an article at incidence angle I will be retroreflected with 100% geometric efficiency (i.e., percent active aperture equals 100%) if and only if the following relation holds:

$$\text{Equation E: } 90^\circ - I' = \tan^{-1} \left[\frac{t}{d + s} \right] + \tan^{-1} \left[\frac{t}{2d + s} \right].$$

I' is the incidence angle after refraction by the article's front surface. $I' = \sin^{-1}(\sin I/n)$, where n is the refractive index of the material. $I' = I$ for hollow retroreflectors. I and I' are either negative or positive; negative and positive values of I and I' are illustrated in FIGS. 12C and 12D,

respectively. Because cube size is being ignored in the following discussion, the dimensions d and s have been relativised to t .

For every value of I , from -90° to $+90^\circ$, there are solutions to Equation E for t , d , and s . For small values of slip s/t , Equation E assures a unique ratio of groove depth to plate thickness, the quantity d/t , for each incidence angle. For example, Table B shows solutions when there is no slip, i.e., $s/t=0$, and when the refractive index is 1.49.

Table B

Tailoring of Plates to Incidence Angles,
Assuming $s/t=0$, $n=1.49$

External Incidence Angle I	d/t Ratio of Depth to Thickness
-90°	0.301
-80°	0.307
-60°	0.351
-40°	0.434
-20°	0.552
0°	0.707
20°	0.906
40°	1.151
60°	1.423
80°	1.628
90°	1.659

For large values of slip s/t , there are solutions to Equation E only for the larger values of I . For example, Table C shows examples when $s/t=.75$, and when the refractive index is 1.49.

Table C

Tailoring of Plates to Incidence Angles,
Assuming $s/t=.75$, $n=1.49$

External Incidence Angle I	d/t Ratio of Depth to Thickness
less than -40°	impossible
-40°	impossible
-20°	0.028
0°	0.169
20°	0.352
40°	0.583
60°	0.842
80°	1.041
90°	1.071

If the ratio d/t is fixed, such as would be the case for a set of fabricated plates, then there will be a range of incidence angles for which it is possible to solve equation E with positive values of s/t . For example, Table D was developed for $d/t=.707$ and refractive index 1.49.

Table D

Slip for Utilization of Plates with
 $d/t=.707$, $n=1.49$

External Incidence Angle I	s/t Ratio of Slip to Thickness
less than 0°	impossible
0°	0
20°	.262
40°	.581
60°	.932
60°	1.199
90°	1.239

The solution with $d/t=.707$ and $s/t=0$ appearing both in Tables B and D corresponds to the embodiment previously discussed, for which L equals t and adjacent plates are offset in the vertical direction by the groove depth d as in FIG. 6, so that the crest of a groove in one plate is aligned with the root of a groove in an adjacent plate and there is no slip.

The solution with $d/t=1.423$ and $s/t=0$ appearing in Table B corresponds to the embodiment of FIG. 10 where L has been increased to approximately twice the thickness of the plate. FIG. 10A shows the projection of the array of FIG. 10 parallel to the cube diagonal (approximately 35.54° to the normal to the plane of the cube apices corresponding to incidence angle I of 60°). Viewed at 35.54° to the normal, as in FIG. 10A, the effective aperture of the microcubes of FIG. 10 is 100%. FIG. 10B shows a projection of the microcubes of FIG. 10 perpendicular to the plane of the cube apices and illustrates that the effective aperture at this angle is low. FIG. 10C shows a projection perpendicular to the sides of the plates wherein alternating plates are shaded differently for clarity.

The solution with $d/t=.707$ and $s/t=.932$ appearing in Table D corresponds to the embodiment illustrated in FIG. 12, for which the active aperture is 100% at the 60° incidence angle as in FIG. 12A. FIG. 12B is a projection of FIG. 12 perpendicular to the sides of the plates, wherein alternating plates have been differently shaded for clarity.

The solution with $d/t=.352$ and $s/t=.75$ appearing in Table C corresponds closely to the embodiment whose performance is shown in the uppermost curve of FIG. 45. Table C shows that this cube is 100% effective at an incidence angle I of 20° . If these cubes are in paired arrays, as they were for the example of FIG. 45, then when one cube array receives light at $I=20^\circ$ the other array receives it at $I=-20^\circ$, for which incidence angle the cube array has low effective aperture. The rising and falling efficiencies of the two cube arrays add to produce the performance curve of FIG. 45 which is flat for entrance angle values from -20° to 20° .

When d/t and s/t solve Equation E for a certain value of I' the hexagon cube achieves 100% active aperture for just that one internal incidence angle. Depending on the refractive index this corresponds to one external incidence angle I . The percent active aperture, and more generally the retroreflectance, of this hexagon cube for all other incidence angles requires additional calculation. Graphs of retroreflectance and percent active aperture versus incidence angle from -90° to $+90^\circ$ are shown in FIGS. 38 and 39, respectively, for nine different unpaired hexagonal microcube arrays. Each of the microcubes has $n=1.49$, $s/t=0$ and d/t chosen, in accordance with Equation E, to make 100% active aperture at one incidence angle between -80° to $+80^\circ$, in 20° increments.

Graphs of retroreflectance versus incidence angle from -90° to $+90^\circ$ are shown in FIG. 37 for an unpaired hexagonal microcube array with $d/t=.707$ and $s/t=0$ and for five different refractive indices. FIG. 37 illustrates, as is well known in the industry, that any analysis of retroreflectance must include the refractive index of the materials used.

When slip is non-zero the cube corners are no longer, strictly speaking, hexagons. In instances where there is an uninterrupted face shared by two or more adjacent cube elements, the dividing lines between elements shall be considered to be the shortest imaginary lines (15 in FIG. 12A) that can be drawn to complete the polygon. The shared or continuous face becomes optically advantageous at certain orientation and entrance angles where a ray that first reflects off the continuous face within one hexagon makes its next two reflections, achieving retroreflection, in a neighboring hexagon.

Slip is a useful parameter for the optical designer. For example, while the solutions in Tables C and D assure 100% geometric efficiency at the chosen incidence angles, they entail different shapes of hexagonal cubes, with different volumes, different diffraction apertures, different spot "weights", and a different cube axis cant.

Cube axis cant, measured with respect to the front face of the array, depends simply on $(s+d)/t$ according to this equation:

$$\text{Equation F: } cant. = -90^\circ + \tan^{-1} \left[\frac{1}{\sqrt{2}} \right] + \tan^{-1} \left[\frac{t}{d+s} \right].$$

It follows from equation E that for an array of hexagonal cubes assembled from grooved plates to have 100% active aperture at 0° incidence angle, d, s and t must satisfy the equation:

$$\text{Equation G: } (2d + s) \cdot (d + s) = t^2.$$

5 From this it follows that:

$$\text{Relation H: } \frac{1}{\sqrt{2}} \leq \frac{d + s}{t} \leq 1.$$

This corresponds, according to Equation F, to a range of cants from 0° to -9.74°. While all cants are obtainable with grooved plate constructions, only those in the range from 0° to -9.74° can be chosen also to have 100% active aperture at 0° incidence angle.

10 To further increase entrance angularity, however, the designer may choose to accept less than 100% efficiency at 0° incidence angle. As illustrated by the series of retroreflectance graphs in FIGS. 42a through e, useful performance, including that at 0° entrance angle, can be obtained from grooved plates having (d+s)/t varying from .5 up to 1.2, i.e., far
15 beyond the bounds of Relation H.

Each of the five families of curves in FIGS. 42a through e represents a different value of d + s and a resultant axis cant; for example, in FIG. 42a, d + s for all three curves is equal to 0.5t and the resulting cant is +8.70° emp, where "emp" means edge-more-parallel. Each
20 of the three curves within each family represents different values of d and s, the sum of which is

0.5t in the 42a family; for one of the three curves within each family, s is chosen equal to 0 (as exemplified by the $d/t=.5$, $s/t=0$ curve in FIG. 42a), and for another of the three curves within each family, d is chosen equal to 0.1t (as exemplified by the $d/t=.1$, $s/t=.4$ curve in 42a). For comparison purposes, the curve of retroreflectance versus entrance angle for the Hoopman triangle discussed in PCT WO95/11463 is the heavier solid line in each figure. The hexagonal microcube can be designed to provide 40% to 100% greater retroreflectance than Hoopman through 34° entrance angle as exemplified in FIG. 42b, or to provide a constant retroreflectance through 40° that exceeds Hoopman by more than 50% from 10° to 40° , as shown by the $d/t=.3$, $s/t=.2$ curve of FIG. 42e, or exceeds Hoopman from 10° to 70° as in the $d/t=.1$ $s/t=1.1$ curve of FIG. 42e.

Note in FIG. 42 that even for an active aperture of 100% the retroreflectance never exceeds 0.9 for polycarbonate articles because of Fresnel losses at the front surface that are included in the calculation of retroreflectance.

Method of Making Rectangular Microcubes

The method of making a tool with rectangular microcubes in accordance with the instant invention begins with a stack of plates 110 (shown in partial top plan view in FIG. 14A), the thickness t of the plate 110 being equal to the desired dimension H (FIG. 26) of the rectangle. The plates 110 are preferably flat and each has at least one flat end 112, shown in side view in FIG. 14B that is cuttable, such as by a diamond cutting tool.

Each plate 110 or a stack of plates 115 is positioned on a ruling machine with the cuttable end 112 up and with the front faces 124 of the plates angled by a desired amount X, for

example 35.26°, with respect to a perpendicular to the cutting plane of the ruling machine, FIG.

15. If a stack of plates is used, the upper edges 125 of the ends 112 all lie within a single plane and, to provide clearance for the cutting tool between the plates to be machined, spacers of cuttable material or spacers 111 retracted from the plane of the edges 125 are provided between plates, FIG. 15, so that the cutting tool does not contact any material that might damage it. The cutting edge 119A of the cutting tool 119 as projected parallel to the direction of cutting, is positioned perpendicular to the plane of the machine bed, and the lower edge of the cuttable end 112 is cut away along the length of a plate 110 until the cutting tool reaches the midpoint of end 112, or beyond, creating bevel face 113, FIG. 15. FIGS. 16A and B show plan and side views, respectively, of a plate 110 after cutting the bevel face 113. This step is repeated for each plate 110 in the stack 115.

To prevent the formation of burrs, after the bevel faces 113 have been cut, the spaces between plates may be filled with a plastic compound 114, FIG. 17, that will not deteriorate the cutting tool. Grooves with a desired included angle Y, for example 90°, are then cut with cutting tool 118 in a direction parallel to each other and substantially perpendicular to the direction of the bevel face cut, forming faces 116, FIG. 18. Dotted line 116A indicates a face 116 yet to be cut. It will be understood and appreciated that the angle Y can be adjusted by controlled tilting of the cutting tool 118, in the manner illustrated in FIGS. 7A, 7B, 8A and 8B for groove angle $C + \Delta C$. In this embodiment, the root of the groove defined by faces 116 intersects the lower edge of bevel face 113.

FIG. 19 is a section (19-19 of FIG. 18) through a finished plate taken at the root of a groove and perpendicular to the direction of the second ruling operation. FIG. 20 is a view

taken in the direction of arrows 20-20, which is parallel to the face of plate 110 and perpendicular to a line through the cube apices, showing the rectangular outline of the microcube 100 defined by bevel face 100A and faces 100B and 100C from adjacent grooves. It may be seen that cube face 100A is a portion between grooves of bevel face 113, and cube faces 100B and 100C are groove faces 116 from adjoining grooves. The thin ruled plates of FIG. 18 can be stacked together, with the orientation rotated 180° in alternating plates, FIG. 21.

Note that the microcubes could be machined in one plate at a time, but the plates are preferably grouped for machining in order to minimize cost.

A variation of the process which may be useful to make very small microcubes is to machine two rows of microcubes on a single plate, thereby permitting doubling the thickness of the plate and increasing its rigidity. As shown in FIG. 22, the thicker plates 210 without spacers are positioned on the ruling machine with the cuttable end 212 up and with the front faces 224 of the plates angled by a desired amount, X, for example 35.26°, with respect to a perpendicular to the plane of the machine bed, FIG. 22.

With one cutting edge 219A of the cutting tool 219, FIG. 22A, as viewed parallel to the direction of tool travel, positioned perpendicular to the plane of the machine bed, a cut is made in the cuttable end 212 extending from the midpoint of the thickness of the plate at its lower edge 223 to a point 222 less than 25% of the width of the plate from the top edge 225 of the plate, FIG. 22, creating first bevel face 213 and temporary face 213A at an angle Z (FIG. 22A) to face 213, where angle Z is between 1 and 2 times the tilt angle X.

The cut may be filled with a plastic compound 114, FIG. 22C, that will not deteriorate the diamond tool, and V-shaped grooves with a desired included angle, Y, for example 90°, are then cut by means of diamond tool 118, FIG. 23, in a direction substantially perpendicular to the direction of cut of first bevel face 213, forming groove faces 216, with the groove roots 221 passing through the lower edge 223, FIG. 23A, of the first bevel face 213.

Inclined faces 216 of adjacent grooves, which meet at a top edge 220, form two faces 200B and 200C of microcube 200, and the first bevel face 213 forms the third face 200A, FIG. 23B; the rectangular outline of the microcube 200 is readily apparent. The method to this point forms a first row of microcubes on the end of the plate.

The plates 210 are then tilted so that front faces 224 are at an angle X with respect to the perpendicular to the plane of the machine bed, FIG. 24. It will be understood that the symbol "X" is used herein generally to designate the angle between the front face of a plate and the perpendicular to the plane of the machine bed, so that the angle "X" in FIG. 22 may or may not be equal to the angle "X" in FIG. 24, depending on the desired performance characteristics of the retroreflective article. Cutting tool 219 is again positioned, as viewed parallel to the direction of tool travel, with a cutting edge being perpendicular to the plane of the machine bed, and a cut is made in the cuttable end 212 of plate 210 completely removing temporary face 213A, FIG. 24, and creating second bevel face 313. The grooves may again be filled with a plastic compound (not illustrated), and additional grooves are cut perpendicular to the direction of cut of second bevel face 313 by means of tool 118, FIG. 25, forming groove faces 316.

Inclined faces 316 of adjacent grooves which meet at a top edge 320 form two faces 300B and 300C of microcube 300 and the second beveled surface 313 forms the third face 300A, FIG. 25B. Thus a second row of microcubes is formed on the other side of the same end of the plate where the first row of microcubes was formed. As is evident from the dotted lines in FIG. 25 representing the intersections of the faces of the microcubes 200, the lines of intersection are discontinuous so that it is not possible to rule a master comprising all-rectangular microcubes with opposing orientations by ruling straight lines in a single flat surface.

Method of Positioning Plates for Ruling

Methods of fixturing to obtain the cube corner configurations described herein will be apparent to those skilled in the art. However, because of the exacting tolerances required for microcubes, further detail is provided regarding means of positioning the plates for machining operations. For all shapes of microcubes, two dowel holes R, FIG. 3A will be ground through the front face of each plate. For hexagonal microcubes, the dowel holes R will be used both to assemble the plates for cutting grooves and to position each plate for grinding another set of two dowel holes M for assembly of the electroforming master. The dowel holes M will be in a different position on each plate. Vertically, the dowel holes M will be displaced from dowel holes R (see FIG. 3A) by an amount equal to $k_1 + n(d+s)$, where k_1 is a constant, n is the number of the plate in the stack, d is groove depth and s is slip; horizontally all dowel holes M will be displaced from the reference holes R by a constant k_2 in all odd numbered plates and by k_2 plus d in even numbered plates where d is the groove depth and is equivalent to $1/2$ the groove width. For cutting grooves, dowels will be inserted only in the reference dowel holes R; for electroforming, dowels will be inserted only in dowel holes M. The error in locating a groove in one plate relative to a groove in an adjacent plate is anticipated to be less than $0.0002''$ (5μ) in

any direction. To avoid negative slip, which will introduce undercut and increase loss, the microcubes will preferably be designed for positive slip greater than 0.0005" (12.5 μ).

To machine rectangular microcubes one plate at a time, the plates will be positioned on the ruling machine by means of dowels through the reference dowel holes R and matching dowel holes provided in a fixture, the surface of which is angled by an amount X from a perpendicular to the bed of the ruling machine. After the bevel face and grooves have been machined, the reference dowel holes R will be used to position the plates for electroforming. The maximum error in positioning the apex for the microcube with respect to the center of the plate is anticipated to be less than 0.0001" (2.5 μ). If a number of plates are to be ruled at one time, secondary dowel holes can be provided on each plate in a manner somewhat similar to the procedure described for hexagonal microcubes; however, for a stack of 10 plates, the error in positioning the apex of the microcube is expected to increase possibly to 0.0005" (12.5 μ) in a direction perpendicular to the side of the plate.

Preferred methods of tooling microcubes have been described in great detail; however, it should be understood that alternative methods of tooling based upon the plate concept will be readily apparent to a skilled toolmaker, and the descriptions above should not be considered as limiting.

Retroreflector Performance

Rectangular microcubes of the present invention differ from hexagonal microcubes of the present invention in two main ways. First, the rectangular microcubes can be arranged as paired (mirror image) elements, whereas the hexagonal microcubes produced from

single cut plates are all alike in orientation; pairing of hexagonal microcubes to produce symmetrical performance requires pairing small mirror image arrays of hexagonal microcubes into a larger array. Second, rectangular microcubes offer generally greater design freedom than hexagonal microcubes produced from single cut plates; for rectangles, the axis cant, the apex centration, and the rectangular proportions are each independently variable (see FIG. 28), whereas for hexagons a change in one of the variables also requires a change in one of the other two. Rectangular cubes can have 100% active aperture at 0° incidence by centering the apex; the cant is then fully adjustable from -54.74° to +35.26°, and the proportions are still variable. By contrast, prior art direct ruled triangles have no independent variables; cant, apex centration and proportions are inextricably interrelated.

For directly ruled triangular microcubes, cube axis cant is determined by the shape of the triangle according to the equation:

$$EQUATION\ I: \quad cant = \cos^{-1} \left\{ \frac{1}{\sqrt{3AB}} \left[1 + \sqrt{A} + \sqrt{B} \sqrt{\frac{AB - 1}{A + B}} \right] \right\}$$

where A and B are the tangents of the triangle's two acute angles. For triangular microcubes tooled by the plate assembly technique of the instant invention (see FIG. 31), cube axis cant becomes a combination of the angle calculated above and the angle between the triangle base and the front surface.

In the recent PCT publications Nos. WO 95/11463, WO 95/11465 and WO 95/11470 of the Minnesota Mining and Manufacturing Co., various graphs depict comparisons of retroreflectivity according to percent active aperture, but do not consider total internal reflection

(TIR) limits, regarding the cube faces as if metallized to have 100% reflectance; nor do they consider the front surface specular losses, which become substantial at high incidence angles.

In the graphs depicted in the present application, unless noted otherwise, the following parameters were chosen for the determination of retroreflectance:

1. The prismatic article was regarded as a single material having a single refractive index.
2. Internal reflectance was calculated with the Fresnel equations, assuming (contrary to fact) unpolarized light.
3. The front surface transmittance was calculated with the Fresnel equations, assuming unpolarized light.
4. No account was taken of cosine losses due to incidence angle.
5. The entrance plane was parallel to a symmetry plane of the cube corners.
6. Diffraction effects were ignored.

The various depicted curves of possible designs are not necessarily representative of commercially practical articles, but do ably demonstrate the wide variety of results that can be

achieved by producing tools and microcube retroreflectors in accordance with various aspects of the present invention.

Most of the graphs are for unmetallized cubes and include the effect of total internal reflection (TIR). FIGS. 39, 40, 44 and 45 demonstrate what happens when the microcubes are metallized. (The term "metallized" is used in a general sense to cover any material applied to the cube faces to provide specular reflection at angles where TIR breaks down.) The various concepts in the above identified recent PCT publications in measuring percent active aperture are material only if the cubes are going to be metallized.

FIGS. 44 and 45 each compare the performance of some articles of this invention with certain prior art. These figures include curves showing the best published geometric efficiencies (measured as percent active aperture) known to applicants, reproduced from FIG. 12 of WO 95/11470 and FIG. 32 of WO 95/11463, respectively, as well as corresponding curves for articles of this invention. FIG. 44 compares the efficiency of two very simple uncanted rectangle cube designs of the instant invention (such as illustrated in FIG. 26), with the efficiency curves from FIG. 12 of WO 95/11470. Note in FIG. 44 that at 0° the percent active aperture of the inventive microcubes is 9% higher than that of the best curve (curve 153) of FIG. 12 of WO 95/11470 and 50 percent higher than the curve for Hoopman. At 20° , the percent active aperture of the inventive microcubes is 29 percent higher than that of curve 153 and 19 percent higher than that of Hoopman.

EXAMPLE 1

Retroreflectors For Increased Entrance Angularity

To increase the entrance angularity of the cubes as described in patents U.S. 3,541,606, U.S. 3,873,184 and U.S. 3,923,378 issued to the same assignee and incorporated herein by reference, the $s/t=0$, $d/t=.707$ solution shown in FIG. 6 might be superseded by an $s/t=.45$; $d/t=.55$ solution as shown in FIG. 13, for which the cube axis tilt is -9.74° to the front surface of the array and the percent active aperture is 72.5% at 0° incidence angle and 100% at 19.6° incidence angle. (Throughout this example, the entrance plane is assumed to be aligned with the symmetry plane of the cube corners, and the refractive index is assumed to be 1.59.)

However, if the hexagon arrays are paired for each cube favorably oriented for 19.6° incidence angle, there is also its mirror image having only 45% effective aperture for that same incident light; the paired array therefore averages 72.5% for light incident at an angle of 19.6° , which is as high as the average at 0° incidence. The result of this averaging of the active apertures is the desirable, surprisingly flat curves of percent active aperture versus entrance angle extending from -20° to $+20^\circ$ for the paired canted rectangles and paired arrays of canted hexagons of FIG. 45, which curves, throughout the 20° entrance angle region, are superior to the active aperture curve for Hoopman by more than 48% and the active aperture curve for example 460 of WO95/11463 by more than 16 percent. The curves of the exemplary rectangles and hexagons of the instant invention continue to be superior to the curve for Hoopman through 50° entrance angle and to the curve for example 460 through 70° , either of which entrance angles is beyond any meaningful entrance angle or specification.

Intimately paired rectangles can be ruled with 1:2 (width:height) proportions of FIG. 27C with the same -9.74° cant and with substantially the same 72.5% active aperture at

both 0° and 19.6° incidence angles as for the exemplary hexagons by decentering the cube apex by 13.75% of the rectangle height. As illustrated by the curves in FIG. 40 and FIG. 45, the average percent active aperture of paired arrays of hexagons and paired rectangles can be remarkably similar at all entrance angles for those cases where the percent active apertures at 0° entrance are matched.

Since the advantages of cube axis canting are realized primarily with cubes relying on TIR, it is more appropriate to base these efficiency considerations on retroreflectance rather than on percent active aperture. In both the rectangle and hexagon examples, when the incidence angle is 19.6° TIR is preserved for that cube (or array) of the pair which gains in effective aperture and lost for the cube (or array) which loses in effective aperture. The net result is total retroreflectance of .898x50.2% for the paired rectangles and .898x52.3% for the paired arrays of hexagons. (The .898 factor is due to the front surface losses.) FIG. 40 compares the retroreflectance and percent active aperture of these rectangle pairs and paired arrays of hexagons over a wide range of entrance angles for an entrance plane aligned with the symmetry plane of the cubes. The $d/t=.55$ and $s/t=.45$ curve of FIG. 42D compares the retroreflectance of the paired arrays of hexagons (and by association, the retroreflectance of the rectangle pairs of FIG. 27C) with Hoopman for entrance angles aligned with the symmetry plane. FIG. 43 shows retroreflectance versus entrance angle for the same rectangle pairs and paired arrays of hexagons for an entrance plane perpendicular to the symmetry plane. In the plane of symmetry the face-more-parallel paired hexagon arrays of FIG. 13 and rectangle pairs of FIG. 27C are superior to Hoopman through 47° ; in a plane perpendicular to the symmetry plane, these pairs are superior to Hoopman through 60° .

Percent active aperture and retroreflectance for paired pentagons (see FIG. 36) are substantially the same as those of the described hexagons and rectangles for the same axis cant and percent active aperture at 0° incidence.

For a discussion of the advantages of the "face-more-parallel" construction with sets of cubes oppositely oriented, see patent U.S. 3,541,606, at col. 15, line 62 through col. 16 line 47, and FIGS. 18, 19 and 20.

Note that the method outlined in Example 1 is intended to maximize the range of entrance angles in one or more planes through which a predetermined minimum retroreflectance can be maintained; the concept requires cubes (or cube arrays) with canted cube axes oppositely oriented as previously described in commonly assigned patents and as used in 3M's "Diamond Grade" sheeting (see also Hoopman U.S. 4,588,258).

* * *

EXAMPLE 2

Retroreflectors For Large Incidence Angles, Such As For Pavement Markers

Example 2 is quite different. The method of Example 2 is intended to maximize the retroreflectance through a relatively smaller range of entrance angles about an axis (the principal incident ray) which is not normal to the face of the retroreflector. For example, a raised retroreflective lane marker mounted on a road may have its front surface tilted back 60° from a plane perpendicular to the plane of the pavement. A light ray from the headlight of an approaching vehicle, being substantially parallel to the pavement, becomes incident on the face of the retroreflector at an angle to the normal of 60° and is refracted (in acrylic) to an angle to the

normal of 35.5°. For purposes of discussion, the ray parallel to the pavement surface and to the centerline of the road will be called the principal incident ray or optical axis and the ray within the marker after reflection at the front surface will be called the principal refracted ray.

A retroreflector for which $L=t$, the plates for which are illustrated in FIG. 6, will not be preferred for use as a pavement marker if the plates are stacked with the upper edges of a groove of one plate aligned with the root of a groove in a neighboring plate as in example 1, FIG. 6A, primarily because of loss of effective cube area. A retroreflected ray departs from a cube corner at a point on the opposite side of the cube apex from the point of incidence and at the same distance from the cube apex. If the principal refracted ray is at an angle to the cube axis, some of the light incident on the cube for which $L=t$ will be lost because there is no corresponding point on the opposite side of the cube center. For 100% utilization of the area of each cube in the direction of the optical axis, the cube diagonal 28, FIG. 12, drawn from the point of intersection 29 of the three real faces of the cube corner to the point of intersection 30 of three imaginary planes parallel respectively to each of the three real faces, must be parallel to the principal refracted ray.

As stated in equation E, for hexagonal microcubes the relationship between I' , d , s , and t is:

$$\text{Equation E: } 90^\circ - I' = \tan^{-1} \left[\frac{t}{d + s} \right] + \tan^{-1} \left[\frac{t}{2d + s} \right]$$

For an acrylic pavement marker with front surface tilt of 30° to the road,
 $I=35.54^\circ$. If slippage is chosen to be zero ($s/t=0$), then

$$90^\circ - 35.54^\circ = \tan^{-1}(t/d) + \tan^{-1}(t/2d);$$

from which $d/t=1.42$.

To produce a tool comprising hexagonal microcubes for the above pavement
marker, the plates will be ruled so that $d/t=1.42$ and will be offset from one another by an amount
 $d=1.42t$ in both the horizontal and vertical directions as in FIG. 10.

Alternatively, the plates of FIG. 6 may be used ($d/t=.707$), and the plates offset in
the horizontal direction by $d=.707t$ and in the vertical direction from one another by an amount
 $d=.707t$ plus $s=.932t$ as in FIG. 12. The irregular hexagons projected along the cube diagonal 28
are defined in part by dotted lines 15 in FIG. 12A. The microcubes may be metallized to provide
better horizontal entrance angularity.

Pavement markers comprising rectangular microcubes tooled by the plate method
can be made with improved horizontal entrance angularity compared with the direct-ruled cubes
of Nelson U.S. 4,895,428. To tool 9° face-more-parallel rectangular cubes for use in an acrylic
pavement marker with a front surface tilt of 55° , the plate thickness is chosen to be equal to H ,
which is the dimension of the side of the cube that is parallel to the symmetry plane as projected
parallel to the principal refracted ray as in FIG. 29A; the plates are positioned on a ruling
machine with the plate at an angle to the vertical, X , equal to the cube axis cant, CAC , plus

35.26° (in this example at an angle, X, equal to 9° plus 35.26°, or 44.26°); the bevel face 113 is cut to the midpoint of the plate; and grooves are ruled perpendicular to the direction of cut of the bevel face to a depth equal to 0.5W as shown in FIG. 29 where W in FIG. 29A is the dimension of the side of the rectangle perpendicular to H. The angle θ in FIG. 29 is the angle between the pentagonal face and the normal to the plane of the cube tips, which angle is equal to 35.26° plus CAC minus $\sin^{-1}[(\sin T)/n]$, where T is the front surface tilt. For the direct ruled cubes of Nelson U.S. 4,895,428, θ is necessarily 0° and the pentagonal face becomes a triangle. FIG. 29 shows the resulting rectangular cube in section, FIG. 30 shows an array of such cubes in perspective, and FIG. 41 illustrates the approximately 11° improvement in horizontal entrance angularity compared with Nelson that is achieved by means of 9° face-more-parallel construction in accordance with the principles taught in Heenan U.S. 3,541,606. The use of face-more-parallel angles greater than 9° for acrylic pavement markers is questionable because of installation tolerances. Note in FIG. 41 that the maximum retroreflectance is limited to about .87 because of the front surface losses at 55° incidence angle.

* * *

EXAMPLE 3

Retroreflectors With Increased Divergence

The divergence of the retroreflected beam (*i.e.*, the observation angularity) can be varied in one plane or in multiple planes by changing the dihedral angles between either two or three faces as taught in U.S. 3,833,285 also to the same assignee and incorporated herein by reference and/or by changing the size of the cube, which affects diffraction.

The dihedral angle can be changed by making the groove angle greater or less than 90° and/or by tilting the stack of plates 10 slightly off the perpendicular to the cutting plane,

as illustrated by angle "b" in FIG. 11, before the grooves are cut. The groove angle can be varied by changing the angle "C" of the diamond tool (FIG. 7A) or by adjusting the angle "e" of the diamond tool (FIG. 8B) with respect to the perpendicular to the surface being ruled, in accordance with Equation A, previously stated.

5

The tilt angle "e" of the cutting tool can be held constant for all grooves.

Alternatively, the tilt angle "e" of the cutting tool can be adjusted continuously as each groove is cut as a function of the distance traveled by the cutting tool along the ruled surface, or the cutting tool can be held at a constant angle "e" for the entire length of each groove, but changed for each successive groove cut into the surface. It is also possible to use a combination of these techniques; i.e., change the angle "e" of the cutting tool with respect to the surface both along the length of each groove, and from groove to groove.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192

grey represents a factor of two in the retroreflected intensity. All the cube corners have perfectly flat faces and an error of $.103^\circ$ on just one of the dihedral angles. FIG. 46a is for $t=.866\text{mm}$; FIG. 46b is for $t=.217\text{mm}$; FIG. 46c is for $t=.087\text{mm}$.

By making the groove angle 90.103° in the plates of FIG. 6, a prismatic article with index 1.49 accurately reproduced from the tool should, by geometry alone, have exactly $.25^\circ$ divergence and with all the retroreflection directed at two points. In fact, the light pattern depends on the cube size. For the large microcubes of FIG. 46a, having a cube height of 1mm, and a width of 1.22mm across the flats, the light pattern does approximate the geometric prediction (FIG. 46a). For the average size microcubes of FIG. 46b, having a cube height of .25mm and a width of .306mm across the flats, the light pattern still resembles the geometric prediction but with considerable broadening (FIG. 46b). For the small microcubes of FIG. 46c, having a cube height of .1mm and a width of .122mm across the flats, the light pattern, contrary to the geometric prediction, has its major peak at 0° divergence and only weak secondary peaks at $.3^\circ$ divergence, near the two predicted points (FIG. 46c). Diffraction by microcubes usefully smooths light patterns, but since it may send light in non-functional directions it must be reckoned in all microcube designs. Adequate cube corner diffraction theory has been in the optical literature for at least 35 years.

* * *

The plates used in the ruling method of the instant invention may be formed of any material that is sufficiently strong and rigid to be ruled when formed into flat plates of the thinness required. The material must also be capable of being cut and polished with a high degree of precision. Certain plastics, such as polymethylmethacrylate, may be suitable if metallized after machining to provide electrical conductivity for electroforming. Suitable metals include

hardened sterling silver 925 fine, hardened aluminum 7075T6, and electroless nickel. Electroless nickel is known to be very hard yet readily cut with a diamond cutting tool. An electroless nickel overlay on a stainless steel substrate may be sliced into plates with the electroless nickel on one end, which plates may be particularly suited for use in the instant invention. Alternatively, the electroless nickel may be formed as non-adherent plates on a passivated stainless steel block (or a block of another material such as aluminum or metallized plastic) to a thickness of about 0.012 inch and separated from the block to serve as plates 10.

In one form of the invention, the assembly of microcubes defined by the plates when ruled, assembled, and oriented as described herein may be used as a master to electroform copies. The copies are then assembled into a cluster of contiguous elements; the cluster is replicated to provide a number of copies; and the process is repeated, eventually to produce flexible strips having an uninterrupted pattern; the strips are assembled on a cylindrical mandrel to provide cylindrical segments; the cylindrical segments are assembled to provide a cylinder of the desired dimensions corresponding to the width of the web intended to be provided with retroreflective elements; and the assembled cylinder is replicated to provide a flexible endless master cylinder having the pattern of microcubes thereon. The master cylinder may then be replicated to form a relatively thick mother cylinder, which may in turn be replicated to form a generally cylindrical metal embossing tool.

The embossing tool so made may then be used to emboss the microcubes on a surface of a continuous resinous sheeting material to manufacture a retroreflective sheeting article, as disclosed in U.S. 4,486,363. In accordance with the method disclosed therein, the embossing tool described above is moved along a closed course through a heating station where

it is heated to a predetermined temperature and then to a cooling station where it is cooled below that temperature; a resinous sheeting material is continuously fed onto the embossing tool through a part of the heating station so that the sheeting is in direct contact with the pattern of hollow microcubes; the sheeting is pressed against the embossing tool at one or more points in the heating station until one surface of the sheeting conforms to the pattern of hexagonal or rectangular microcubes; the embossing tool and sheeting are passed to the cooling station such that the sheeting is cooled below its glass transition temperature; and the embossed sheeting is stripped from the embossing tool.

Those skilled in the art will recognize that, in addition to the embossing tools and techniques described above, the hexagonal or rectangular microcube embossing tool made as described above may also be used to manufacture retroreflective sheeting by other methods such as molding, pressing, or casting. For example, the electroformed strip as described above having the pattern of hollow hexagonal or rectangular microcubes can be provided with a proper support and used directly as an embossing or compression molding tool but in a non-continuous manner, as described in Rowland U.S. Patent No. 4,244,683.

The retroreflective sheeting made in accordance with the instant invention and having a precise optical pattern of microcubes of various cube shapes is advantageous over sheeting currently being made with triangular microcubes. For the small entrance angles of 0° to 5° , which are of particular interest for retroreflective highway markers and signs, substantially the entire area of the hexagonal or rectangular microcubes is effective for retroreflectance, but only 66 percent of the area of triangular microcubes is retroreflective. Thus, at these small

entrance angles, the hexagonal or rectangular microcube retroreflective sheeting represents a 50 percent increase in retroreflective area compared with prior art triangular microcubes.

Retroreflective articles other than sheeting that are currently manufactured with macrocubes may also benefit from a change to hexagonal or rectangular microcubes. For example, pavement markers incorporating microcubes of the instant invention will be less costly because of reduced material cost, may be deteriorated less by abrasion because the exiting rays are closer to the incident rays so that the effect of surface irregularities is reduced, and, for recessed pavement markers or low profile plowable pavement markers, the loss due to shadowing is minimized.

It is well-known in the reflective sheeting art that different sheeting materials such as acrylic, polycarbonate, and vinyl, have different indices of refraction, "n", and will yield different retroreflective results, even for identical cube shapes (see FIG. 37).

Many variations of cubes are possible by modifications of the tooling procedure of the instant invention. For example:

- (1) Square cubes, as in FIG. 26, can be tooled by reducing the depth of the intersection at 421 of groove faces 416 and of the intersection at 521 of groove faces 516, relative to the depth of the intersection at 423 of the bevel faces 413 and 513, as shown in FIGS. 27 and 27A. The resulting array of square microcubes is shown in plan view in FIG. 27B, wherein cube 500 is square and face 500A with extended imaginary lines 515 is pentagonal; compare 500A of FIG. 27B with the triangular face 300A of FIG. 25B.

Also note that the quadrilateral faces 500B and 500C of FIG. 27B are elongated compared with faces 300B and 300C of FIG. 25B. Square cubes or even cubes elongated beyond square have some advantages regarding the spot pattern of retroreflected light.

5 (2) The angle of the cube axis with respect to the normal to the plane of the cube apices can be varied by selection of the angle X (FIGS. 15, 22 and 23A) of the front face 124 or 224 of the plate with respect to the perpendicular to the bed of the machine and/or by angling the bisector of the included angle of the V grooves in FIGS. 18, 23, 25 and 27 with respect to the perpendicular to the bed of the machine; for a discussion of the effect of cube axis angle on entrance angularity, see patent U.S. 3,541,606 to the same assignee and subsequent related patents, such as Hoopman U.S. 4,588,258.

10 (3) For rectangular or pentagonal microcubes, the dihedral angles between cube faces can be varied from 90° by setting the cutting edge 119A of tool 119, FIG. 15, for example, at an angle to the perpendicular to the machine bed, as viewed in the direction of tool travel, for machining the bevel face, and/or by increasing or decreasing from 90° the included angle Y of the V grooves (FIG. 18); changing the dihedral angle between faces controls divergence of the retroreflected beam.

15 (4) The cube aperture size can be varied by changing the plate thicknesses and groove depth or by machining one row of microcubes on a double thickness plate larger than the row of microcubes with which it is paired; combining microcubes of different cube aperture size minimizes the potential diffraction loss at any one observation angle.

(5) Because one edge of the rectangular cube is rectilinear, sets of opposed pairs of rectangular cubes with different characteristics can be assembled without area loss or slippage walls between the sets; therefore adjoining sets can have different cube axes or different divergence, or different cube height with no inactive surfaces or sharp edges between the sets. For the transition between plates with different cube heights, the cube apices of one or both adjoining rows of cubes of different size may be moved off center; moving the apices of the last row of cubes in a set of large cubes towards a set of smaller cubes will tend to equalize the volume of material in the two sets of cubes.

Similarly, sets of opposed pairs of rectangular cubes can be assembled with plates bearing optic detail other than microcubes, such as a flat surface, a cylindrical surface, or lenticular elements. Such sheeting comprising retroreflective portions and other optical portions is known in the art as transilluminated sheeting. The rectilinear edge of a flat or cylindrical optic surface may be set at the same height as the rectilinear edges of the rectangular microcubes, thereby avoiding any slippage walls between the two types of plates.

(6) For large angles of incidence, in macrocube technology the rectangular cubes in a bundle of pins may be assembled oriented all in one direction as exemplified by the use of hex cubes for pavement markers, in which use there will be a slippage wall paralleling the cube axis and corresponding to one exposed side of the pin. Similarly, for microcube technology, plates on which rectangular microcubes have been machined can be assembled with adjacent plates oppositely oriented (or for large incidence angles optionally oriented in the same direction) and with the cube apices contacting a reference

surface set at an angle of $(90^\circ - R)$ to the side of the plates, where R is the angle between the principal refracted ray and the normal.

(7) Square cubes such as illustrated in FIG. 32, in which four orientation sets are closely grouped, can be produced by making plates as in FIG. 33. Three sets of grooves are cut as indicated, although not necessarily in any order. For each of the three grooves, two faces are shaped, one on each of two different cubes. Each set of grooves requires a different tilt angle X for the plates and a different included angle of the cutting tool, both of which are calculable by trigonometry. Table J below lists plate tilt angles and the included angle of the cutting tools used to generate cubes of various cube axis cants. For example, if the cube axis cant is to be 0° , then to make cut #1 the angle X to which the plate must be tilted will be 45° and the included angle of the first cutting tool will be 109.47° . To create the four cube orientations shown in FIG. 32, the finished plates are assembled with alternate plates oppositely oriented, i.e., rotated 180° with respect to each other. When the cube axis cant is to be other than 0° , the values of the tilt angle of the plate and included angle of the cutting tool, for each of the three sets of grooves, can be calculated as shown in the following Table J.

Table J

	Groove 1		Groove 2		Groove 3	
Cube Axis Cant	Tilt Angle	Included Angle	Tilt Angle	Included Angle	Tilt Angle	Included Angle
-10°	35.02°	120.31°	16.22°	62.44°	59.80°	163.35°
-8°	36.92°	118.02°	16.99°	65.15°	58.57°	161.90°
-6°	38.87°	115.78°	17.76°	67.85°	57.36°	160.40°
-4°	40.86°	113.61°	18.53°	70.54°	56.16°	158.85°
-2°	42.90°	111.51°	19.32°	73.21°	54.97°	157.25°
0°	45°	109.47°	20.10°	75.88°	53.79°	155.60°
2°	47.15°	107.51°	20.90°	78.53°	52.63°	153.91°
4°	49.35°	105.63°	21.70°	81.16°	51.49°	152.17°
6°	51.60°	103.83°	22.51°	83.78°	50.35°	150.38°
8°	53.91°	102.11°	23.32°	86.39°	49.23°	148.56°
10°	56.28°	100.50°	24.14°	88.98°	48.13°	146.69°

The above noted values of the cube axis cant are for illustrative purposes only, and are not intended to limit the scope of the invention or the range of cube axis cants obtainable by the method of the instant invention.

(8) To produce pentagonal microcubes such as illustrated in FIG. 36, plates 710 and 810 are provided, each of which has one side flat and the other side grooved with V grooves having a width equal to the desired spacing of the cubes on the plate and an included angle equal to

$$\text{EQUATION K: } g = 2 \arctan \frac{(\sqrt{3} \cos (v-u))}{(\cos (v) - \sqrt{2} \sin (v))}$$

where g is the included angle of the grooves and u and v are the angles of cant of the cubes formed on plates 710 and 810, respectively (See FIG. 36A.) Plates 710 and 810 are not necessarily the same thickness. Bevel faces 813 and groove faces 716 are cut into the smooth side and the grooved side respectively of plate 810 following a procedure similar to that described in detail for rectangular cubes. Bevel faces 713 and groove faces 816 are cut into the grooved side and the smooth side respectively of plate 710. The plates are then assembled as illustrated in FIG. 36 with two plates 710 paired and oppositely oriented alternating with two plates 810 paired and oppositely oriented. The equivalent of the assembly of two paired and oppositely oriented plates 710 could also be made by cutting two rows of cubes on one thicker plate as was illustrated for rectangular cubes in FIGS. 22 through 25A; for this construction both sides of the plate would be grooved. Note that the bevel faces 713 and 813 are continuous for the length of the plates 710 and 810, respectively; as with hexagonal cubes, in instances where there is an uninterrupted face shared by two or more adjacent cube elements, the dividing line between elements shall be considered to be the shortest line (lines 715 and 815 in FIG. 36) that can be drawn to complete the polygon. To avoid damage to the edges of the grooves on the sides of the plates, the plates are assembled for machining with the grooved sides against a similarly grooved dummy plate.

(9) To produce triangular microcubes such as illustrated in FIG. 31, for which the cant and active area are not solely dependent upon cube shape, a plate 110 or a stack of plates is positioned on a ruling machine with the cuttable end up and with the sides of the plate angled by a desired amount X with respect to a perpendicular to the cutting plane of the ruling machine. A pattern of triangular microcubes is then ruled onto the cuttable

ends of the plates in a manner similar to the ruling of an uninterrupted surface, which is taught in Stamm, U.S. 3,712,706 or in U.S. 4,478,769 assigned to applicant's assignee. The ruled plates are then assembled as shown in FIG. 31 with alternate plates oriented 180° to each other. Alternatively, the assembly of FIG. 31 could be made by starting with a double thickness plate 210 and separately ruling two arrays of triangular microcubes on its end, which was illustrated for rectangular microcubes in FIGS. 22 through 25. The cant of the triangular microcubes tooled by either of the methods above will be a combination of the angle X and the cube axis cant resulting from the selected ruling angles. In most instances, the paired cubes in the array will be alternately face-more-parallel and edge-more-parallel.

(10) A retroreflective array comprising hexagonal cubes with pentagonal faces, FIG. 35, is made from a plurality of plates, each plate having a plurality of parallel V-grooves on the two opposing surfaces. To make the plates, first a master is made by plating adherent electroless nickel onto the surface of a stainless steel block to a thickness of approximately .010". The electroless nickel master is ruled to form one set of parallel V-grooves with a 120° included angle and a groove width equal to the desired dimension across flats of the hexagonal microcube, .006" for example. The grooved surface is passivated and additional electroless nickel is deposited on the master to a depth of approximately .010". Before removing the electroless nickel deposit from the master, the surface of the deposit is machined with a like set of parallel 120° V-grooves, aligned with the first set of V-grooves on the master, and to a depth such that the greatest thickness of nickel in the deposit is equal to the desired dimension across flats times 1.155. The deposit is separated as a grooved plate from the master.

The plate is positioned with the grooves perpendicular to the bed of the ruling machine. Faces A are machined by a cutting tool having an included angle of 70.52° (as projected in the direction of cutting), the bisector of the included angle being perpendicular to the bed of the machine. The plates then are tilted so that a grooved side makes an angle X equal to 50.77° with respect to a perpendicular to the bed of the machine and faces B1 are cut with a cutting tool having an included angle of 131.81° with the bisector of the included angle perpendicular to the bed of the machine. The process is repeated for faces B2.

The finished plates are stacked for electroforming with grooves interlocking, which results in adjacent plates being displaced half a cube width laterally. One plate in the assembly is shown in bold outline.

For each microcube there will be left exposed in the assembly of plates one small triangular vertical wall where the cube dihedral edge in one plate abuts the face of a cube in an adjacent plate as indicated by the circles labeled C in FIG. 35. This exposed wall is not expected to be a problem in either electroforming or in assignee's embossing process, but, if necessary, the exposed wall can be drafted.

Those skilled in the art will recognize alternative methods for making arrays of hexagonal cubes with pentagonal faces, based on the invention herein, but the method shown is preferred for ease of tooling plates.

5

It will be understood that while machining using diamond tools to form grooves and edges is the disclosed embodiment, other linear forming techniques, such as laser cutting, EDM, or ion machining, or the like may be used. It will further be understood that known variations of ruling techniques may be employed without departing from the scope and spirit of the invention. For example, grooves may be cut wherein the faces are not planar, but have a slight and known curvature.

Continued on next page

WHAT IS CLAIMED IS:

1. An article comprising an array of microcubes, at least one of said microcubes being non-hexagonal, such that for every plane in space there are two adjacent microcubes for which at the place of the adjacency none of the face edges is parallel to that plane.
2. The article of claim 1 wherein said array is retroreflective.
3. The article of claim 2 wherein said article comprises retroreflective sheeting.
4. The article of claim 3 wherein at least one microcube of said array has a projected area of about 1mm^2 or less.
5. The article of claim 4 wherein at least one microcube of said array has a projected area of about 0.35mm^2 or less.
6. The article of claim 5 wherein at least one microcube of said array has a projected area of about $0.04 - 0.12\text{mm}^2$.
7. The article of claim 3 wherein said sheeting comprises a polymer resin.

8. The article of claim 7 wherein said polymer resin is selected from the group consisting of acrylic, polycarbonate, vinyl, polyester, and polyethylene.

9. The article of claim 7 wherein said microcubes are formed by embossing.

10. The article of claim 7 wherein said microcubes are formed by casting.

11. The article of claim 1 in which at least one microcube of said array is canted.

12. The article of claim 11 wherein the array is formed in a material having a refractive index n , and the cant of at least one microcube in said array does not exceed about $\tan^{-1}\sqrt{2} - \sin^{-1}(1/n)$.

13. An article of claim 11 comprising an array of microcubes, such that for every plane in space there are two adjacent microcubes for which at the place of adjacency none of the face edges is parallel to that plane, and in which at least one microcube of said array is rectangular or pentagonal, said at least one microcube of said array being canted face-more-parallel.

14. The article of claim 11 in which at least one microcube in said array is edge-more-parallel.

15. The article of claim 11 in which not all the cube axes in said array are parallel to each other.

16. The article of claim 15 in which some adjacent cubes are alternately face-more-parallel and edge-more-parallel.

17. The article of claim 14 wherein retroreflectance in the plane of symmetry of the microcubes of said array is substantially constant and is greater than about 50% for all entrance angles less than about 30° .

18. The article of claim 11 in which said array is a retroreflective part of a pavement marker.

19. An article comprising an array of microcubes, such that for every plane in space there are two adjacent microcubes for which at the place of adjacency none of the face edges is parallel to that plane, and in which a plurality of microcubes of said array are rectangular or pentagonal, said plurality of microcubes being canted face-more-parallel, at least one of said microcubes having a plane of symmetry in which lies the cube axis of said microcube, said face-more-parallel microcubes being present as paired microcubes or paired microcube arrays thereby increasing the entrance angularity both in the plane of symmetry and perpendicular to the plane of symmetry.

20. The article of claim 19 in which said article has a face for receiving incident light, and the retroreflector axis of said article is normal to said face.

21. An article of claim 19 comprising an array of microcubes, at least a portion of said array having substantially 100% active aperture for incidence angles of about 0° .

16. The article of claim 15 in which some adjacent cubes are alternately face-more-parallel and edge-more-parallel.

17. The article of claim 14 wherein retroreflectance in the plane of symmetry of the microcubes of said array is substantially constant and is greater than about 50% for all entrance angles less than about 30° .

18. The article of claim 11 in which said array is a retroreflective part of a pavement marker.

19. An article comprising an array of microcubes, such that for every plane in space there are two adjacent microcubes for which at the place of adjacency none of the face edges is parallel to that plane, and in which a plurality of microcubes of said array are rectangular or pentagonal, said plurality of microcubes being canted face-more-parallel, at least one of said microcubes having a plane of symmetry in which lies the cube axis of said microcube, said face-more-parallel microcubes being present as paired microcubes or paired microcube arrays, thereby increasing the entrance angularity both in the plane of symmetry and perpendicular to the plane of symmetry.

20. The article of claim 19 in which said article has a face for receiving incident light, and the retroreflector axis of said article is normal to said face.

21. An article of claim 19 comprising an array of microcubes, at least a portion of said array having substantially 100% active aperture for incidence angles of about 0° .

22. An article comprising an array of hexagonal microcubes, at least a portion of said array having substantially 100% active aperture at a predetermined angle of incidence.

23. An article comprising an array of contiguous microcubes, in which at least some of said contiguous microcubes are triangles, the shapes of which are such that

$$\cos(cant) \neq \frac{1}{\sqrt{3AB}} \left[1 + (\sqrt{A} + \sqrt{B}) \sqrt{\frac{AB-1}{A+B}} \right]$$

where A and B are the tangents of two acute angles of the triangle.

24. An article comprising an array of triangular microcubes, the non-dihedral face-edges of each such microcube defining a plane, at least one of such defined planes being not parallel to at least one other such defined plane.

25. An article comprising paired rectangular microcubes.

26. An article comprising an array of rectangular microcubes, at least some of which have no dihedral face-edges collinear with any dihedral face-edges of any adjacent microcubes.

27. The article of claim 26 wherein said array comprises square subarrays of four adjacent square microcubes, wherein each microcube is rotated 90° with respect to an adjacent microcube.

28. An article comprising an array of pentagonal microcubes.

29. The article of claim 1 wherein said article is a master for use in the production of a tool for making a retroreflective article.

30. The article of claim 1 wherein said article is an electroform for use in the production of a tool for making a retroreflective article.

31. The article of claim 1 wherein said microcubes of said array are of unequal sizes.

32. The article of claim 3 wherein said sheeting is transilluminated.

33. A method of making an article having a pattern of hexagonal microcubes, the method comprising:

providing a plurality of about microthick plates, each plate having at least one end and one face,

placing said plates adjacent one another such that said ends of said plates lie substantially in a single plane;

providing in said plate ends a plurality of micro-sized substantially V-shaped grooves having polished surfaces, said groove surfaces defining an included groove angle for each said groove, said grooves having predetermined depth and width; and

displacing the adjacent plates with respect to one another so that the grooves on adjacent plates are offset from one another by about one half a groove width horizontally and greater than about one groove depth vertically, to form a pattern of hexagonal microcubes.

34. The method of claim 33 wherein the included groove angle is not constant along the length of a groove.

35. The method of claim 33 wherein the length of the side of each groove is not about equal to the thickness of each plate.

36. The method of claim 33 wherein the grooves are not substantially perpendicular to the faces of the plates.

37. A method of making an article having a pattern of rectangular microcubes, the method comprising

providing a plurality of about microthick plates, each plate having at least one end,

providing a bevel face on said end of each said plate,

providing a plurality of grooves on said ends of said plates substantially perpendicular to said bevel face to define a row of rectangular microcubes, and

arranging said plates in a pre-determined arrangement of rows of rectangular microcubes.

38. The method of claim 37 wherein the apices of said rectangular microcubes are all in one plane.

39. The method of claim 37 wherein the apices of said rectangular microcubes are not all in one plane.

40. The method of claim 37 wherein said plates are arranged so that adjacent plates are oriented 180° to each other.

41. The method of claim 37 wherein each said groove has two groove faces which intersect at a groove root, said bevel face has a lower edge, and said root of at least one said groove intersects the lower edge of said bevel face.

42. The method of claim 37 wherein said bevel face is provided along one edge of said end of each said plate.

43. A method of making an article having a pattern of rectangular microcubes comprising

- providing a plurality of plates each plate having at least one end,
- providing a first bevel face on each said end,
- providing a first plurality of grooves on each said end substantially perpendicular to said first bevel face to define a first row of rectangular microcubes,
- providing a second bevel face abutting said first bevel face on each said end,

providing a second plurality of grooves substantially perpendicular to said second bevel face to define a second row of rectangular microcubes, and

and arranging said plates in a pre-determined arrangement of rows of rectangular microcubes.

44. The method of claims 33, 37, or 43 wherein the included groove angle is not the same for each of said grooves.

45. The method of claims 33, 37, or 43 wherein said plates are each of substantially the same thickness.

46. The method of claims 33, 37, or 43 wherein said grooves are substantially parallel to one another.

47. The method of claims 33, 37 or 43 wherein said grooves have substantially flat faces.

48. The method of claims 33, 37, or 43 wherein said grooves are provided by cutting with a cutting tool and said plate ends are of a material capable of being simultaneously cut and polished by said cutting tool.

49. The method of claim 48 wherein said plate ends comprise electroless nickel.

50. The method of claim 48 wherein said plate ends comprise a rulable plastic.

51. The method of claims 33, 37, or 43 wherein the inside intersecting faces of at least one groove are of different lengths.

52. The method of claims 33, 37, or 43 wherein said grooves are provided by ruling with a cutting tool having an included angle, and wherein the included angle of the cutting tool is chosen smaller than the desired included angle of the groove and the desired included angle of the groove is obtained by tilting the cutting tool in accordance with the equation

$$e = \cos^{-1} [(\tan 0.5C)/\tan 0.5(C + \Delta C)]$$

where C is the included angle of the cutting tool, C + ΔC is the included angle of the groove, and e is the tilt of the cutting tool away from the vertical.

53. A method of making an article having a pattern of microcubes, said method comprising,

providing a plurality of plates of about micro-sized thickness, each such plate having two substantially parallel faces and at least one end therebetween,

providing a plurality of micro-sized polished grooves in the ends of the plates, each groove comprising at least one face and

positioning the plates adjacent one another in a pre-determined arrangement to define a desired pattern of hexagonal microcubes, said pattern comprising the faces of the grooves in the ends of the plates, the pre-determined arrangement of plates being determined by the plate thickness t, groove depth d, and the desired slip s between plates, the slip s being not equal to zero.

54. The method of claim 53 wherein during the step of providing said grooves, the plates are held at a pre-determined angle relative to the direction of said grooves, said pre-determined angle being not equal to 90°.

55. The method of claim 53, wherein during the step of providing said grooves, the plates are held at a pre-determined angle relative to the direction of said grooves, said pre-determined angle being not equal to 90°

56. The method of claim 53 wherein t, d, and s have values such that

$$0.5 \leq \frac{d + s}{t} \leq 1.2$$

57. The method of claim 56 wherein t, d and s have values such that

$$\frac{1}{\sqrt{2}} \leq \frac{d + s}{t} \leq 1$$

58. The method of claim 53 wherein the microcubes are rectangular and wherein the method includes the further step of providing a bevel face along one edge of said end of the plate.

59. The method of claim 58, wherein in said pre-determined arrangement, adjacent plates are rotated 180° with respect to one another.

60. The method of claim 53 wherein said microcubes are rectangular and wherein two rows of microcubes are formed on said end of each said plate, said method including the additional steps of

providing a first beveled face along about the midpoint of the thickness of said end, such that the microcubes of said first row each comprise a portion of said first bevel face and faces of two adjacent grooves,

providing a second bevel face along about the midpoint of the thickness of said end, and providing a second plurality of micro-sized grooves, such that the microcubes of said second row each comprise a portion of said second bevel face and faces of two adjacent grooves of said second plurality.

61. The method of claim 60 wherein said first and second bevel faces intersect at a given depth from said end, and wherein the depth of the grooves and the depth of the intersection of said first and second bevel faces are selected such that said resulting microcubes are square.

62. The method of claim 53 wherein said microcubes are square with rectilinear edges and said plurality of grooves comprises three sets of grooves, and wherein the grooves of said first set have a first included angle and are provided with said plates at a first tilt angle, the grooves of said second set have a second included angle and are provided with said plates at a second tilt angle, and the grooves of said third set have a third included angle and are provided with said plates at a third tilt angle.

63. The method of claim 62 wherein in said pre-determined arrangement adjacent plates are rotated 180° with respect to one another.

64. The method of claim 53 wherein said microcubes are pentagonal, and wherein said plurality of plates is provided as a first plurality of plates and a second plurality of plates, each of said plates having one flat face and the opposite face having a plurality of parallel V-grooves, such that said end of each plate has a flat side and a grooved side, each of said first plurality of plates is provided with a bevel face along the flat side of said end, and is provided with a plurality of grooves along the grooved side of said end, each of said second plurality of plates is provided with a bevel face along the grooved side of said end, and is provided with a plurality of grooves along the flat side of said end, and the plates are positioned adjacent one another in a predetermined arrangement such that pairs of oppositely oriented plates of said first plurality alternate with pairs of oppositely oriented plates of said second plurality.

65. The method of claim 64, wherein the V-grooves in the side faces of the plates have an included angle of g , where

$$g = 2 \arctan \frac{(\sqrt{3} \cos (v-u))}{(\cos (v) - \sqrt{2} \sin (v))}$$

and where v and u are the cants of the pentagonal microcubes of said first and second plurality of plates, respectively.

66. The method of claim 53 wherein said microcubes are hexagonal with pentagonal faces, and wherein said plurality of plates is provided with a plurality of V-grooves on the two opposing faces thereof, such that each said end has two grooved sides,

a first plurality of grooves being provided in each said end with said plate held in a first position,

a second plurality of grooves being provided in each said end with said plate held in a second position,

a third plurality of grooves being provided in each said end with said plate held in a third position, and

said plates being positioned with side grooves interlocking, thereby to define a pattern of hexagonal microcubes with pentagonal faces.

67. The method of claim 66 wherein said first plurality of grooves have an included angle of about 70.52° and said first position is substantially vertical, said second plurality of grooves have an included angle of about 131.81° and in said second position said plate is tilted about $+50.77^{\circ}$ from the vertical; and said third plurality of grooves have an included angle of about 131.81° and in said third position said plate is tilted about -50.77° from the vertical.

68. The method of claim 53 wherein said microcubes are triangular, wherein said plates are held at a desired angle from the vertical,

three sets of parallel grooves are provided in said ends, each set of grooves having a predetermined included angle, and each set of grooves being at a predetermined angle with respect to said other two sets of parallel grooves, thereby to define a row of triangular microcubes on each said end, and

the plates are arranged with adjacent plates oppositely oriented.

69. The method of claim 68 wherein the predetermined included angle of each set of grooves is about 70.52° and each set of grooves is at an angle of about 60° with respect to the other two sets.

70. A method of making microthick plates for use in the manufacture of an article having microcubes, comprising

providing a substrate having a passive surface,

depositing on said passive surface a microthick layer of a material, and

separating said deposited material as a microthick plate from said substrate.

71. The method of claim 70 wherein said material is electroless nickel.

72. The method of claim 70 wherein said substrate is provided with undercuts and said deposited material extends into said undercuts, whereby said deposited material is retained on said substrate prior to separation therefrom.

73. The method of claim 72 wherein said deposited material is separated from said substrate by machining through said deposited layer in the vicinity of said undercuts.

74. The method of claim 72 wherein said passive surface is a polished surface.

75. The method of claim 74 wherein said polished surface of said substrate is replicated in said plate.

76. The method of claim 70 wherein said material is deposited to a desired thickness.

77. The method of claim 70 wherein said material is deposited to greater than a desired thickness and is then machined to said desired thickness.

78. The method of claim 77 wherein said material is provided with an optical surface as it is being machined to said desired thickness.

79. The method of claim 70 wherein said deposited material is polished.

80. The method of claim 70 wherein said passive surface of said substrate is grooved prior to the deposition of said layer of material thereon, whereby said grooved surface is replicated in said plate.

81. The method of claim 70 wherein said deposited material is provided with a plurality of grooves, whereby said plate is grooved on its two opposing faces.

82. The method of claim 70 wherein said deposited material is provided with a plurality of grooves.

83. The method of claim 70 further comprising the steps of
providing said deposited material with a plurality of grooves,
depositing on said grooved surface a second layer of material,
providing a second plurality of grooves on the surface of said second layer of
material, and
separating said second layer of material from said first deposited material, such
that said second layer of material is a plate being grooved on its two opposing faces.

84. The method of claim 83 wherein said first deposited material is passivated prior to
the deposition of said second layer of material thereon.

85. A method of making plates for use in the manufacture of an article having
microcubes, comprising,
providing a substrate having a surface,
depositing on said surface a layer of a material, and
slicing the substrate into microthick plates having the deposited layer on one end
thereof.

86. The method of claim 85 wherein said deposited material is electroless nickel.

87. A microthick plate made in accordance with the method of claim 70.

88. A microthick plate made in accordance with the method of claim 85.

89. A microthick plate having two opposing surfaces and at least one end therebetween, said at least one end being provided with a plurality of microcube faces.

90. A microthick plate of claim 89 wherein said end comprises electroless nickel.

91. A pavement marker for establishing on a finished roadway surface a marking visible from an oncoming vehicle, said pavement marker comprising a base member adapted to be mounted on the finished roadway surface, and a retroreflective signal means, said retroreflective signal means comprising an array of microcubes of claim 1.

92. The pavement marker of claim 91 wherein the retroreflective signal means front surface is sloped about 30° - 40° with respect to the road surface and comprises an array of canted rectangular microcubes, the cube axis cant being in the range of about -5° to -13° .

93. The pavement marker of claim 92 having horizontal entrance angularity up to at least about 30° .

ABSTRACT OF THE INVENTION

A method for tooling a pattern of retroreflective microcubes, which pattern can be subdivided into smaller increments within which there are straight line tooling paths, none of which pass through an otherwise solid part of the incremental pattern. The tooling paths within the various increments need not be parallel to a common plane.

Various adaptations of the method enable the tooling of a number of specific microcube shapes and for modifying such optical properties of the microcubes as entrance angularity, incidence angularity, orientation angularity, observation angularity, percent active aperture and retroreflectance. Specific techniques govern the pre-selection of cube parameters such as cube axis cant, cube apex decentration, and cube boundary proportions, which parameters can be adjusted independently of each other. Designs tooled by the method can have 100% active aperture at near zero degrees entrance angle.

The method involves providing a plurality of plates of micro thickness, each plate having at least one end comprised of a material that can be tooled with polished surfaces by means of an appropriate tool, tooling on said end of each plate an increment of the pattern, and assembling the plates together in various ways to form a master.

Retroreflective articles made by means of this technique are expected to provide superior performance when used in pavement markers, highway signs and other applications.

FIG. 1

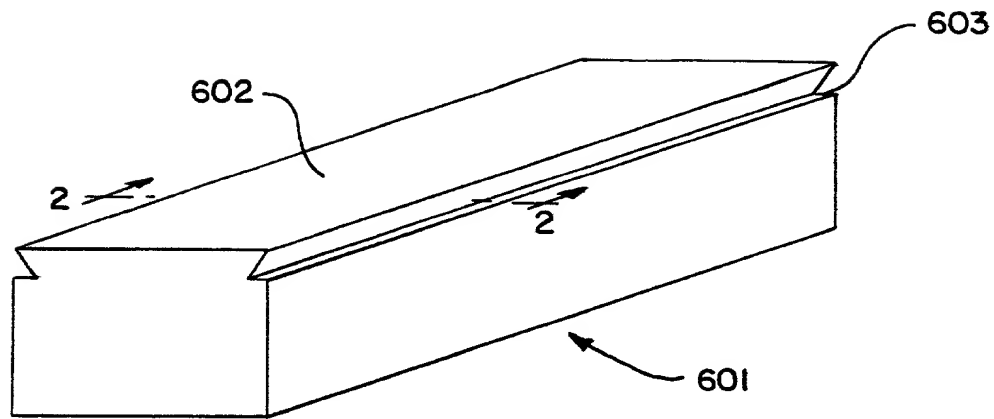


FIG. 2A

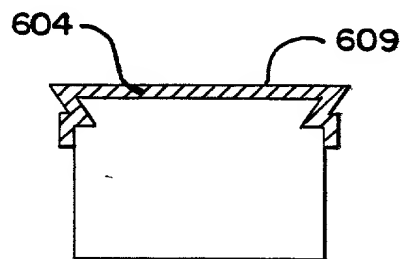


FIG. 2B

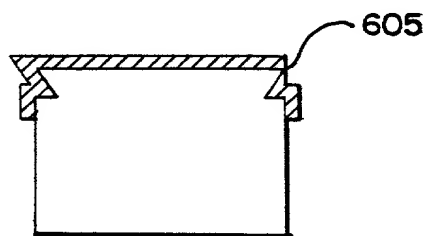


FIG. 2C

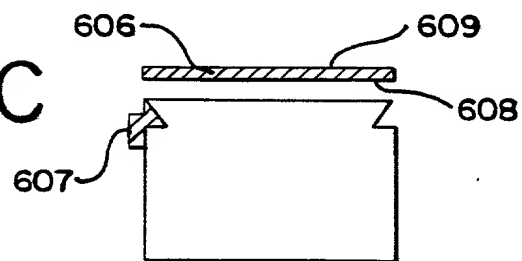


FIG. 3

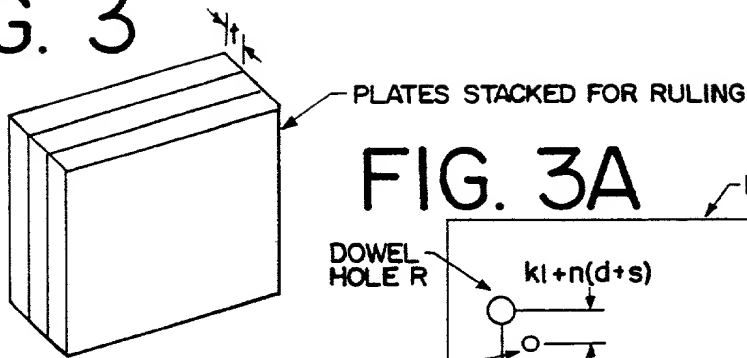


FIG. 3A

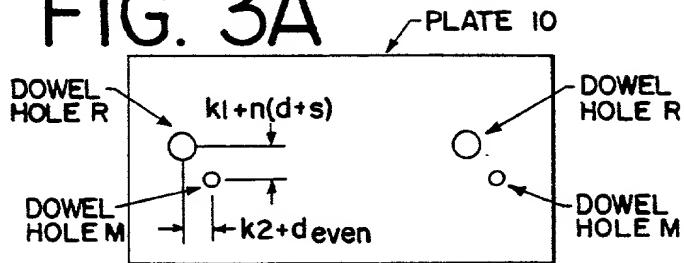


FIG. 4

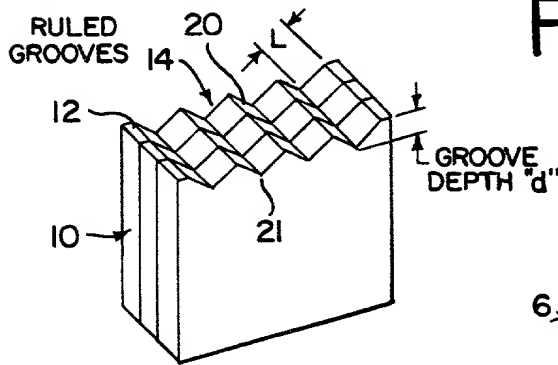


FIG. 5

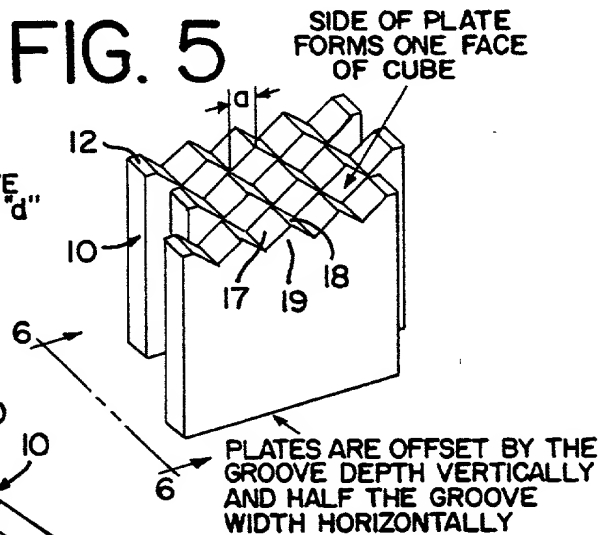


FIG. 6A

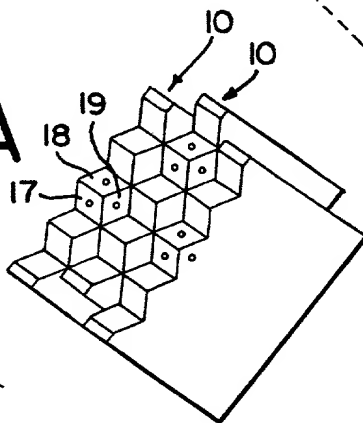


FIG. 6

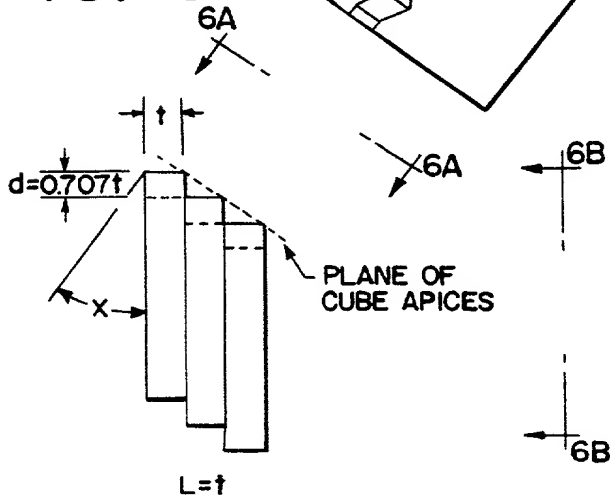


FIG. 6B

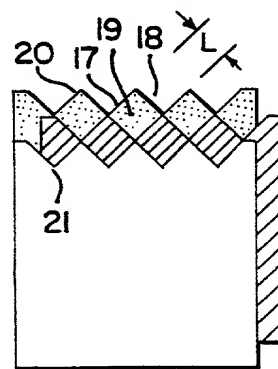


FIG. 7A




FIG. 7B



FIG. 9

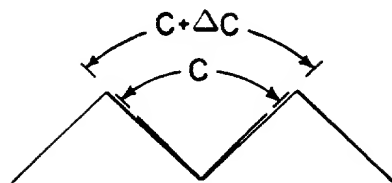


FIG. 8A




FIG. 8B

TOOL DIRECTION DURING CUTTING





FIG. 10A

PROJECTION ALONG CUBE DIAGONAL

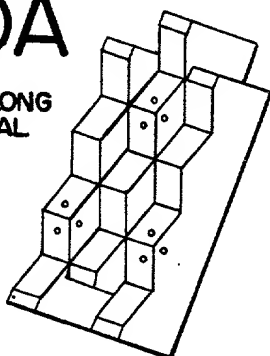

PROJECTION PERPENDICULAR TO THE PLANE OF THE CUBE APICES

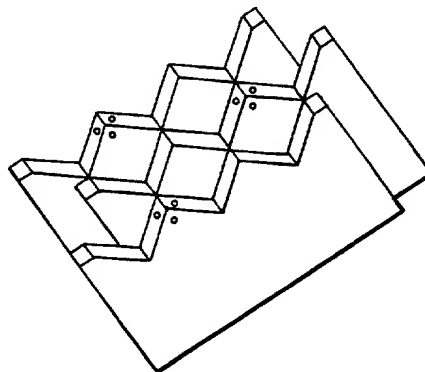


FIG. 10

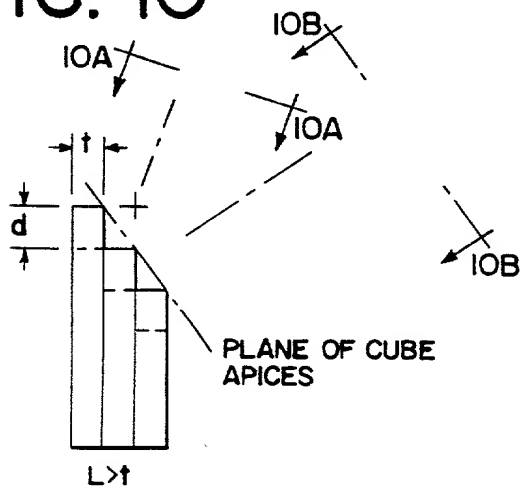


FIG. 10C

PROJECTION PERPENDICULAR TO FACE OF PLATE

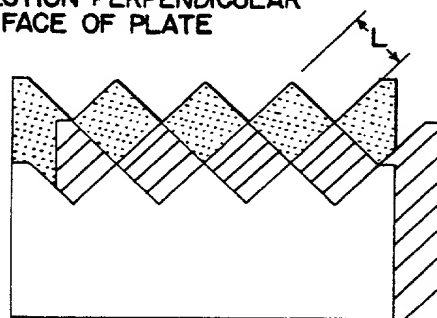


FIG. 11A

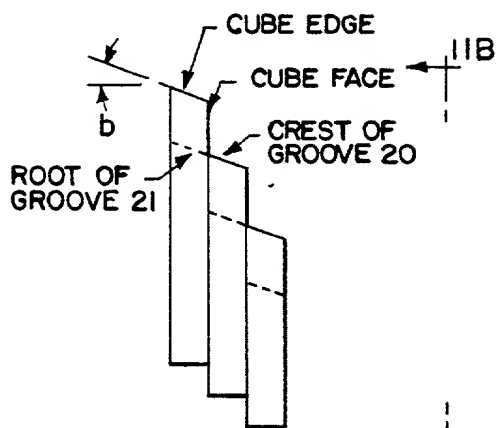


FIG. 11B

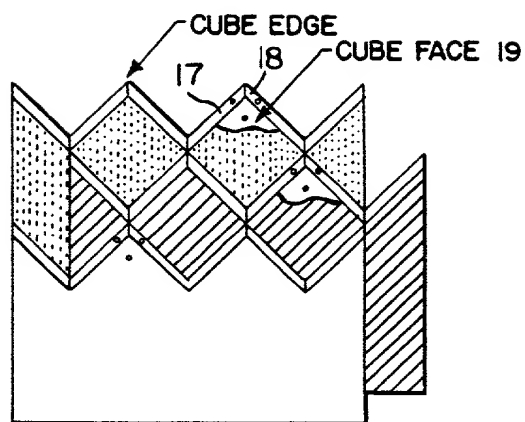


FIG. 11

PLATE ANGLE HIGHLY EXAGGERATED

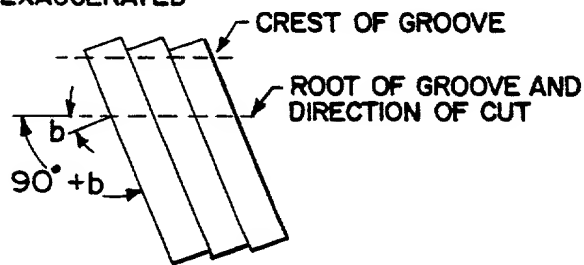


FIG. 12A

PROJECTION ALONG CUBE DIAGONAL



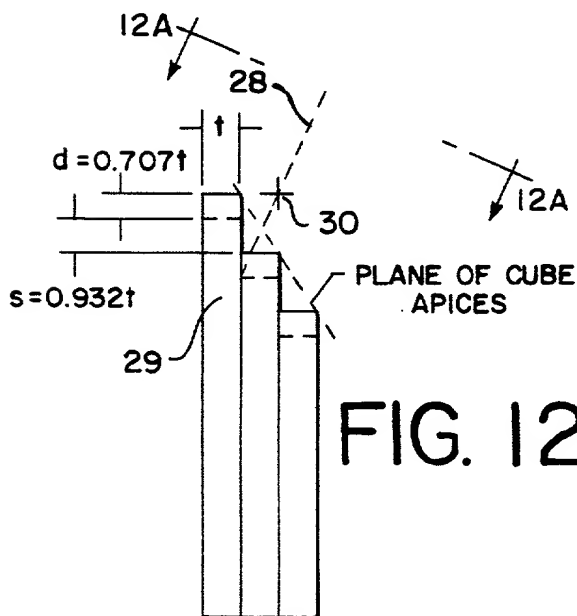


FIG. 12B

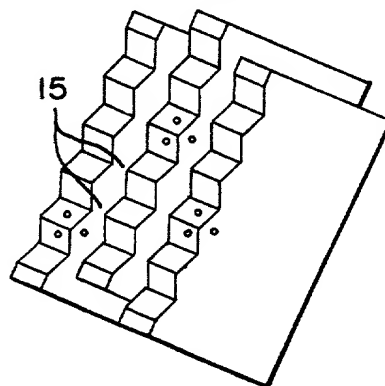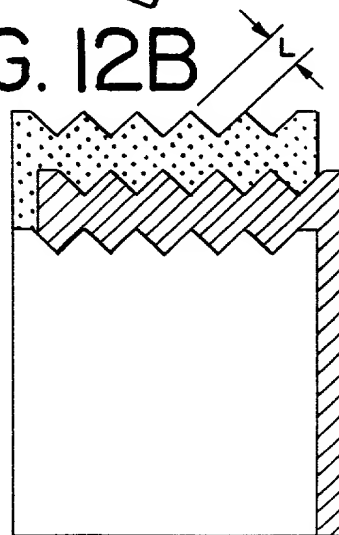

PLATES DISPLACED SO GROOVE
EDGE DOES NOT MEET GROOVE
ROOT OF ADJACENT PLATE $L=t$

PROJECTION PERPENDICULAR
TO FACE PLATE

FIG. 12C

INTERRELATIONSHIP OF
d, s, t, I AND I'
FOR NEGATIVE VALUES OF I

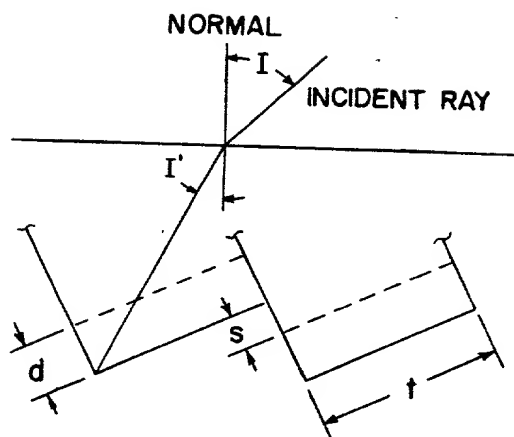


FIG. 12D

INTERRELATIONSHIP OF
d, s, t, I AND I'
FOR POSITIVE VALUES OF I

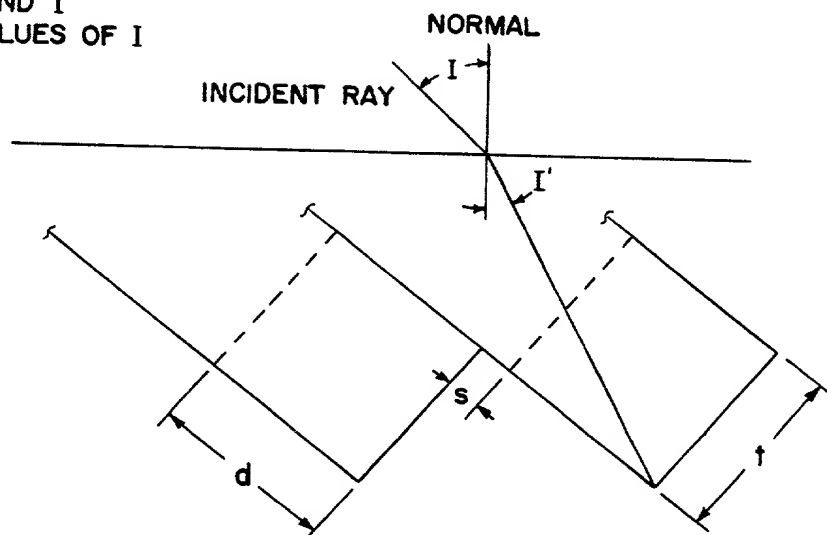


FIG. 13

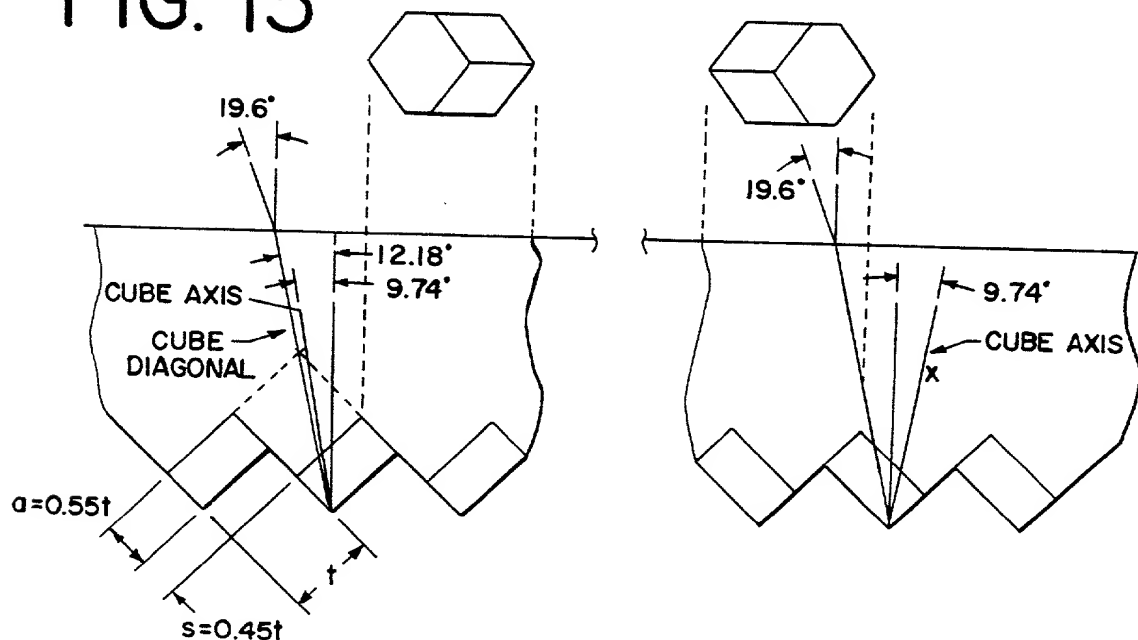




FIG. 14A

FIG. 14B




FIG. 15

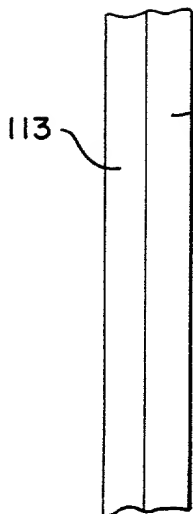
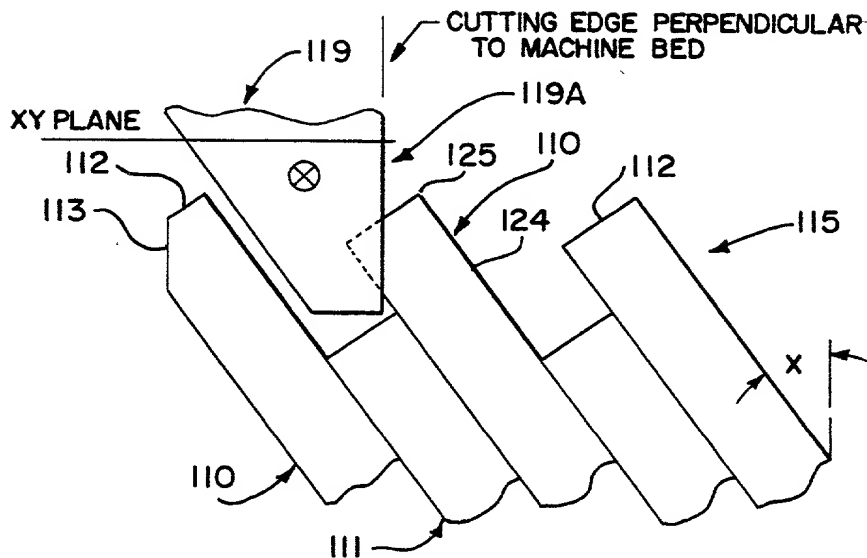


FIG. 16A

FIG. 16B

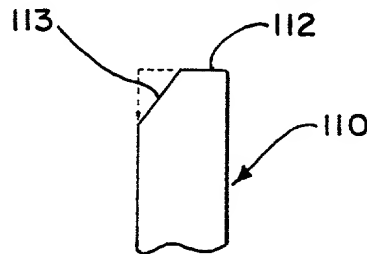


FIG. 17

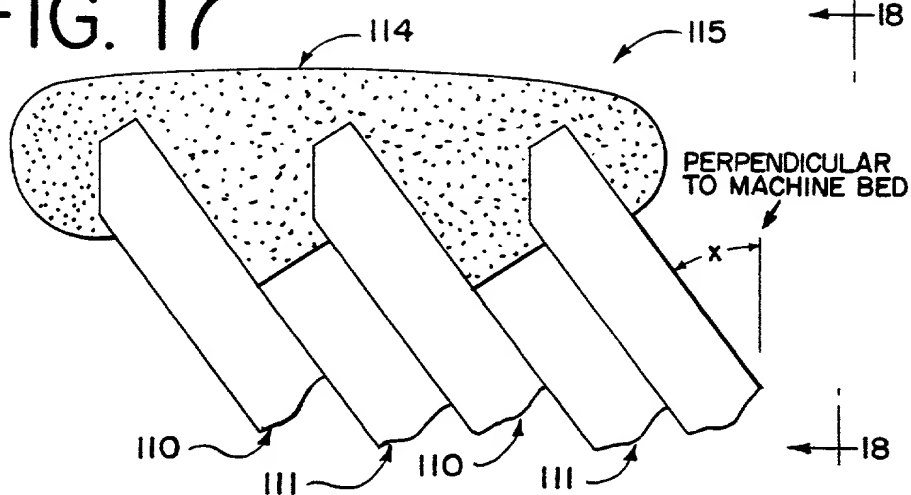


FIG. 18

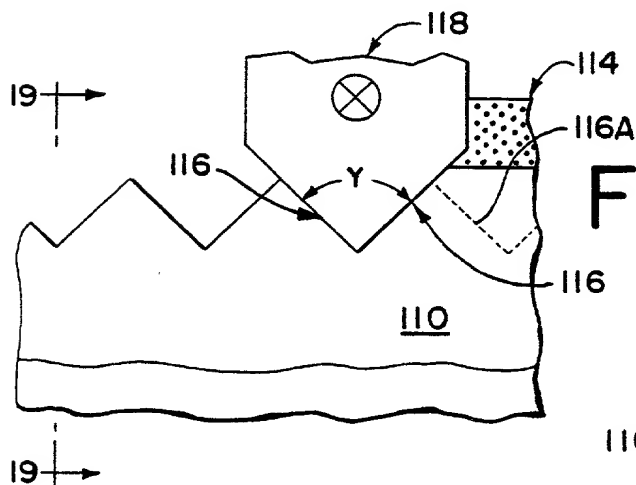


FIG. 21

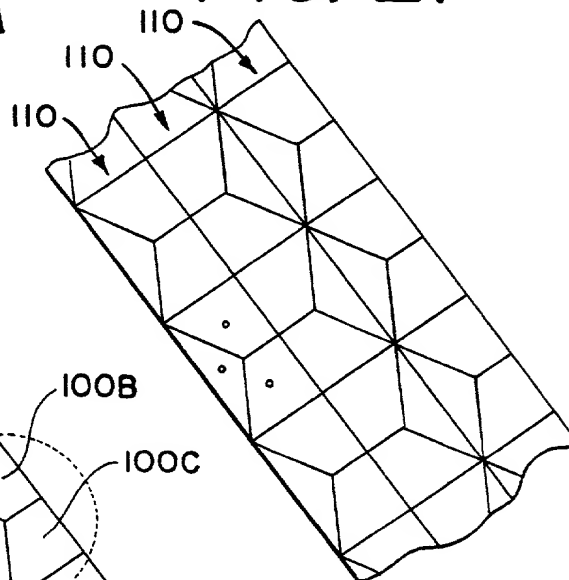


FIG. 20

FIG. 19

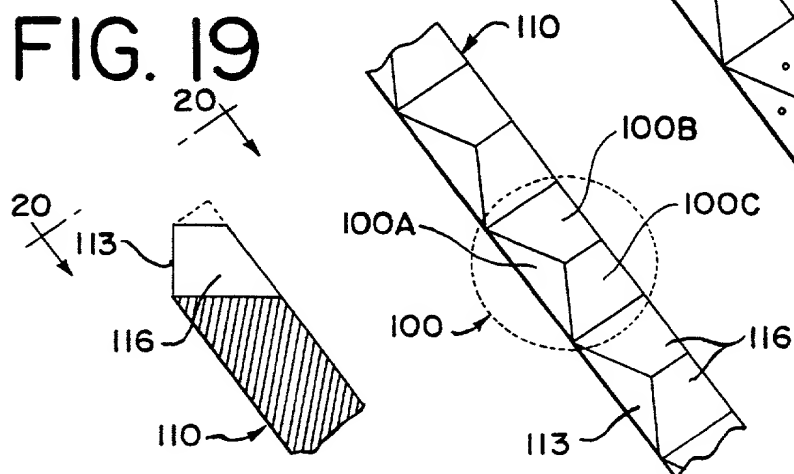


FIG. 22A

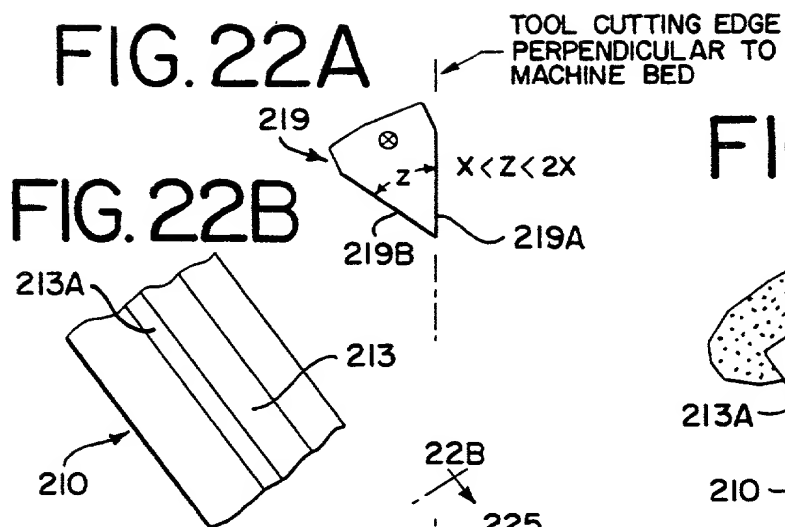


FIG. 22C

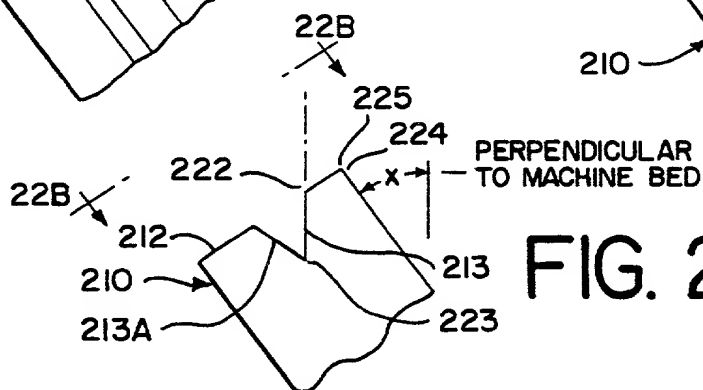
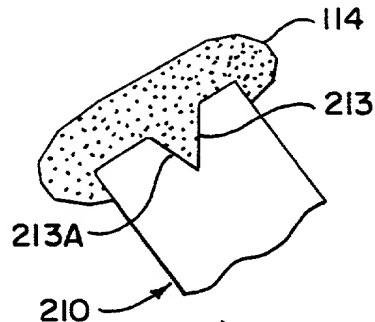


FIG. 22

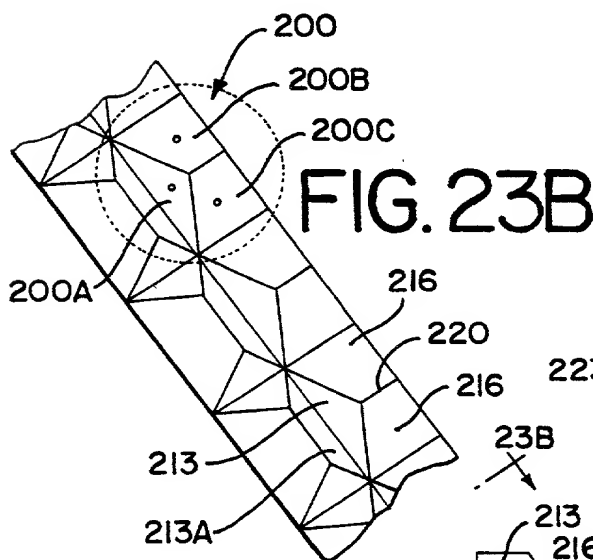


FIG. 23

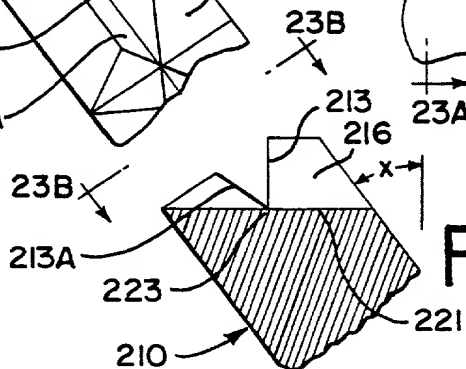
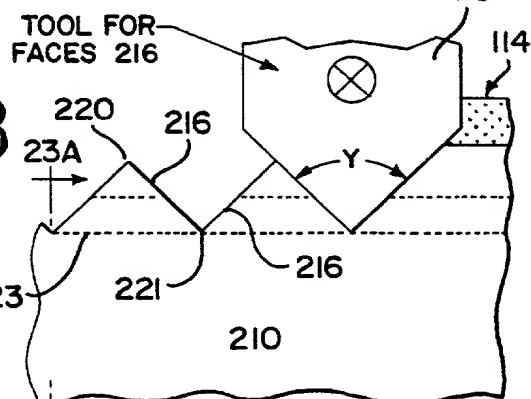


FIG. 23A

FIG. 25B

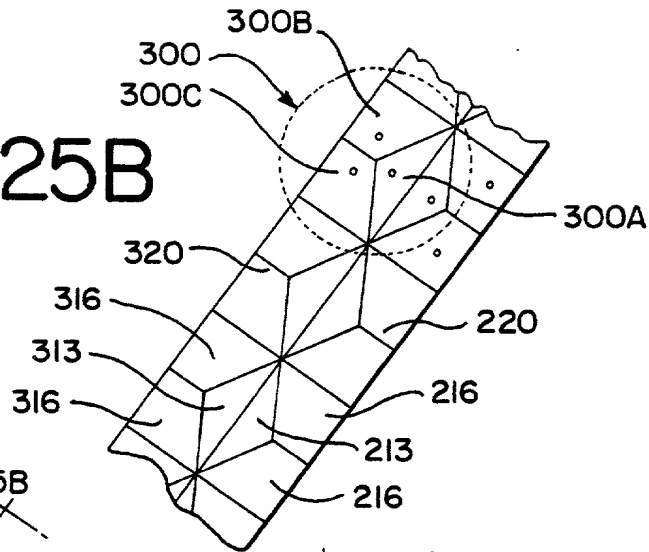


FIG. 25A

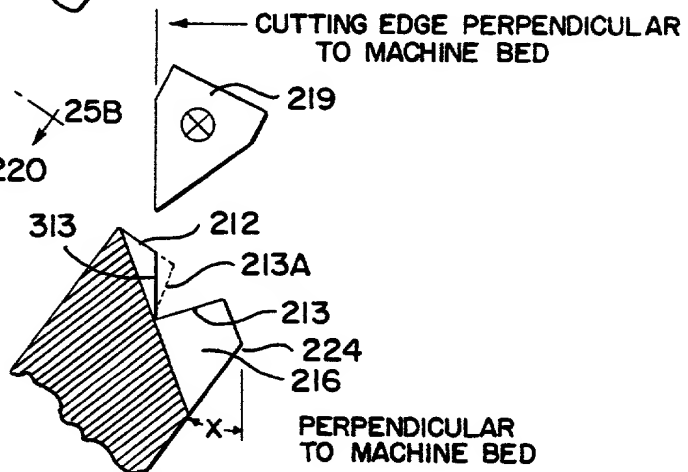
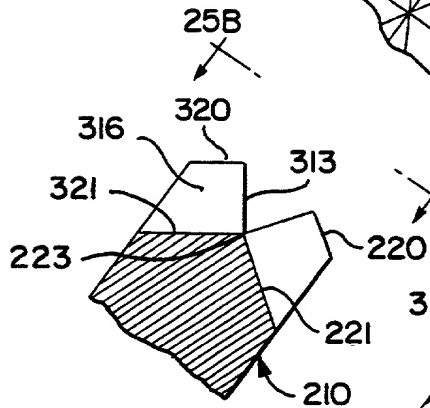


FIG. 24

FIG. 25

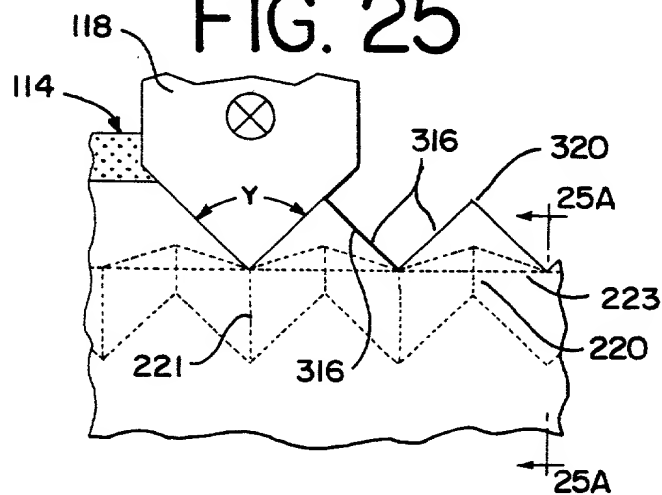


FIG. 26

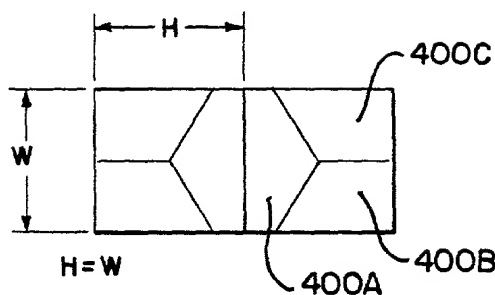


FIG. 27B

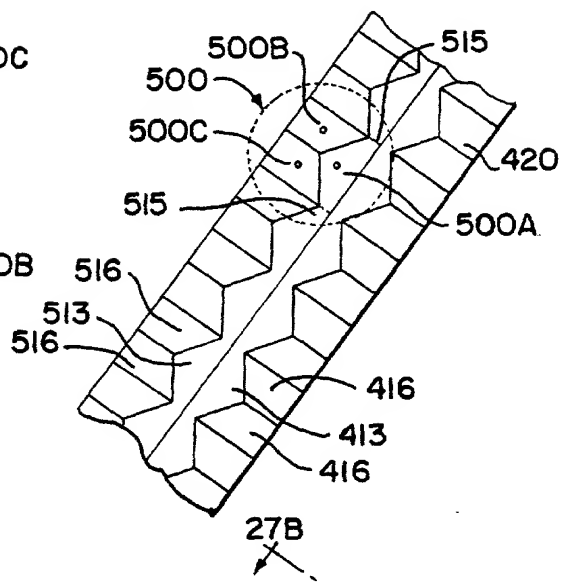


FIG. 27

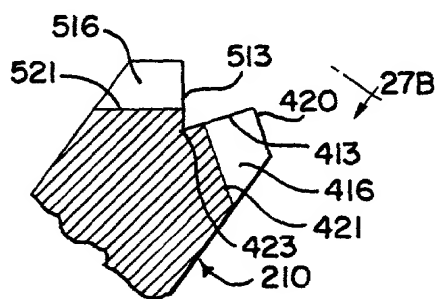
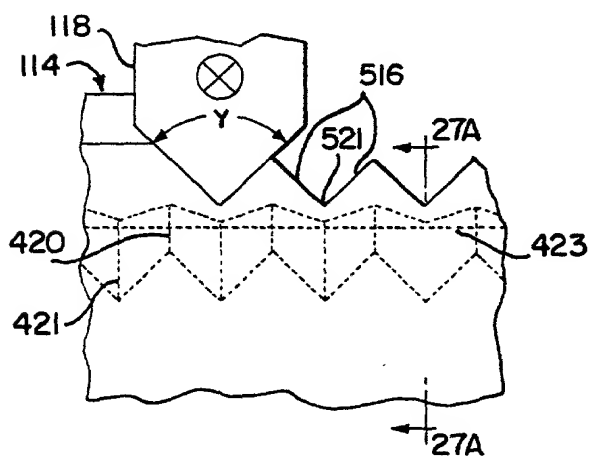


FIG. 27A

FIG. 27C



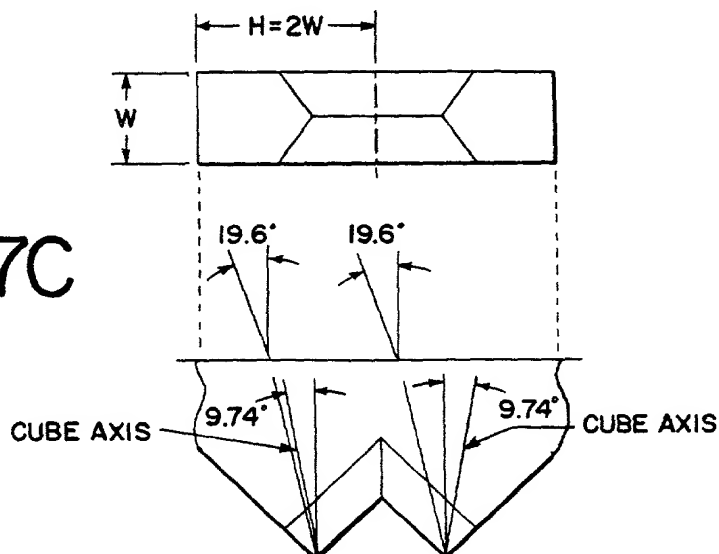


FIG. 28


APEX
DECENTRATION



TOWARDS FACE,
58% ACTIVE




CENTERED,
100% ACTIVE




TOWARD EDGE,
58% ACTIVE


BOUNDARY
PROPORTIONS

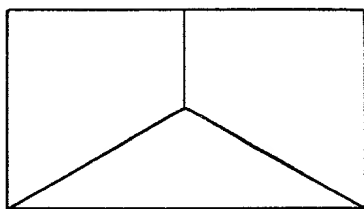

1.73:1




SQUARE




1:2


AXIS
CANT



CANT = -9.74°



UNCANTED



CANT = $+15^{\circ}$

FIG. 29A

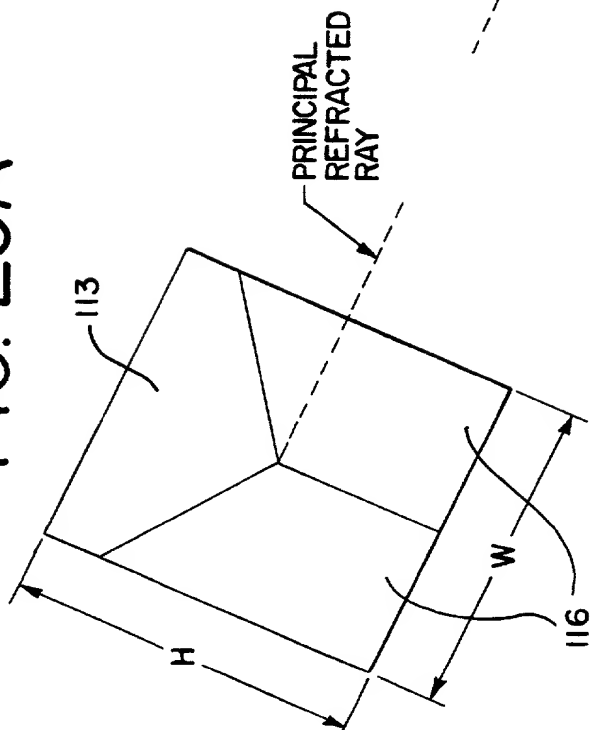


FIG. 29

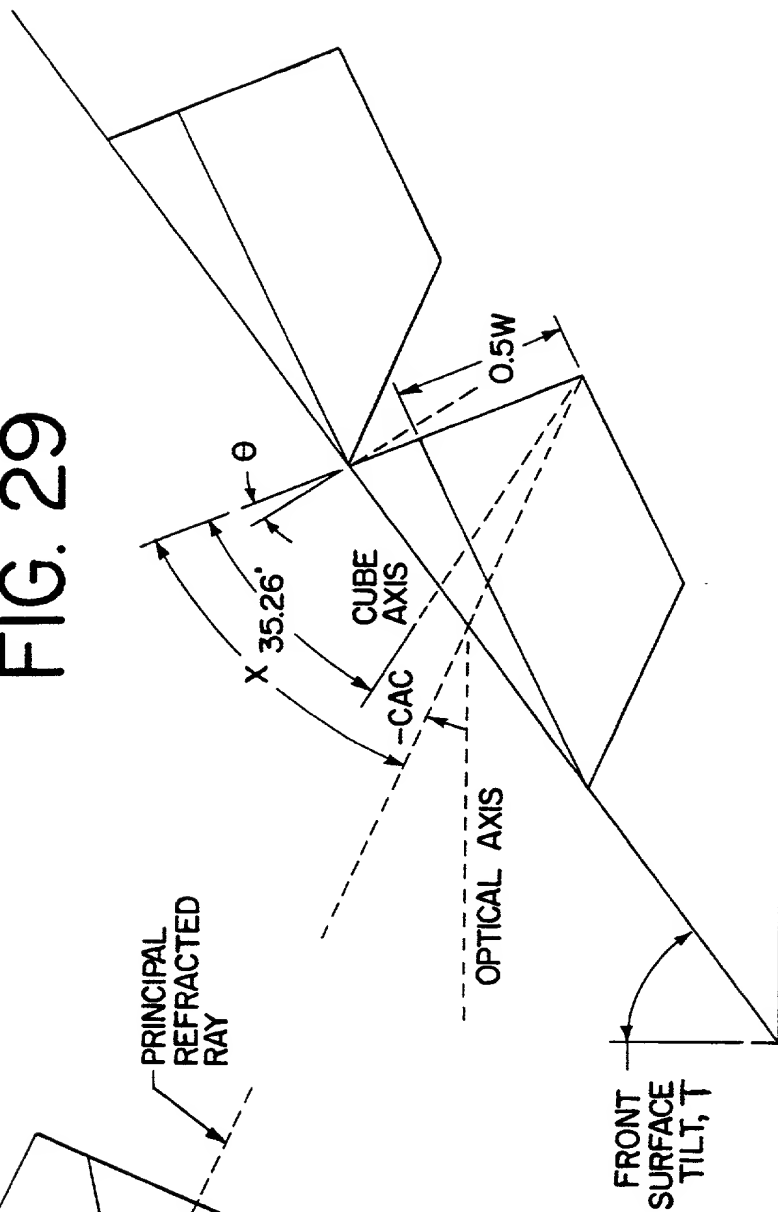


FIG. 30

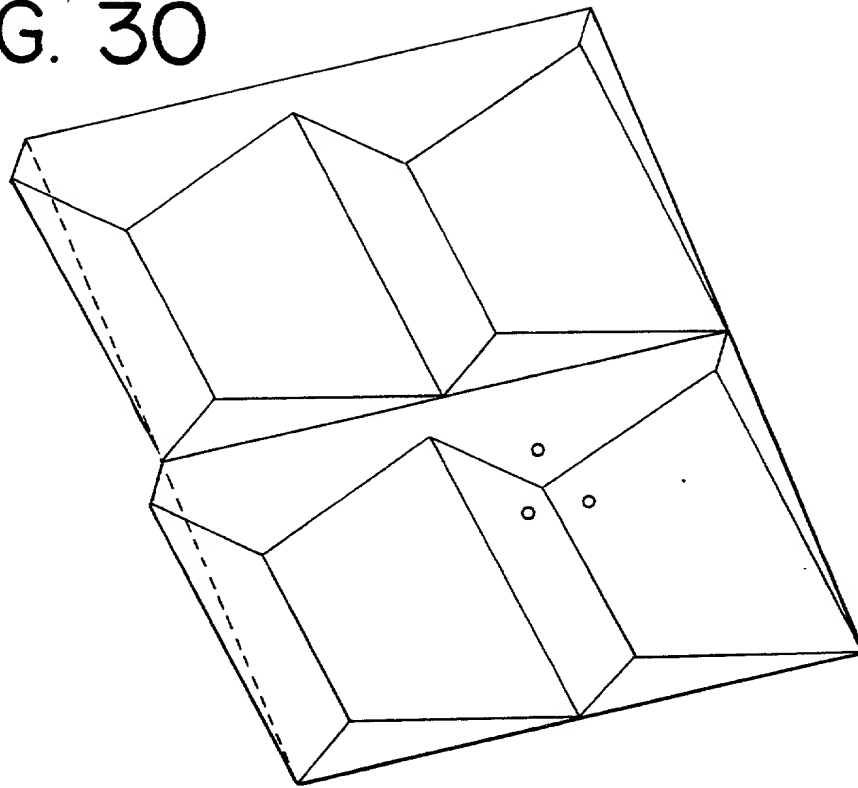


FIG. 31

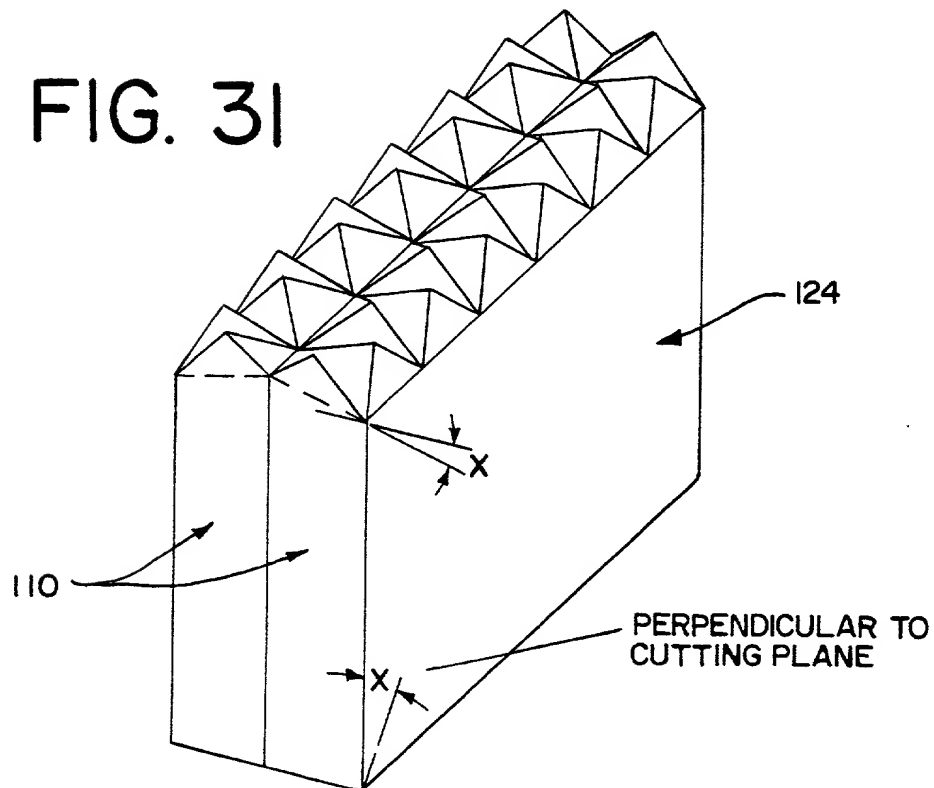


FIG. 32




FIG. 33

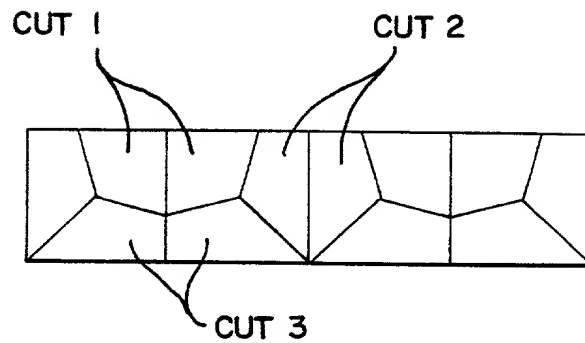


FIG. 34A

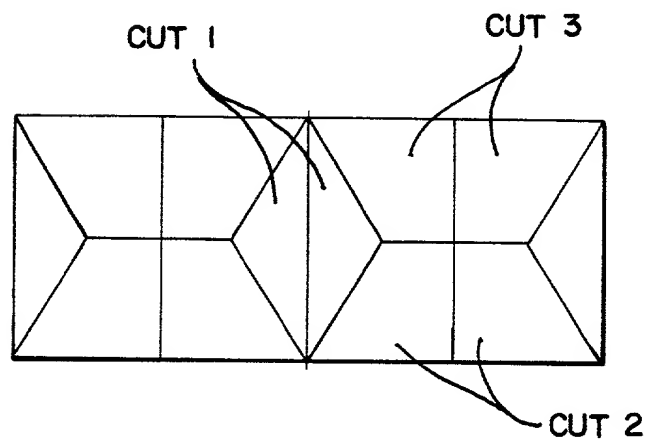


FIG. 34B

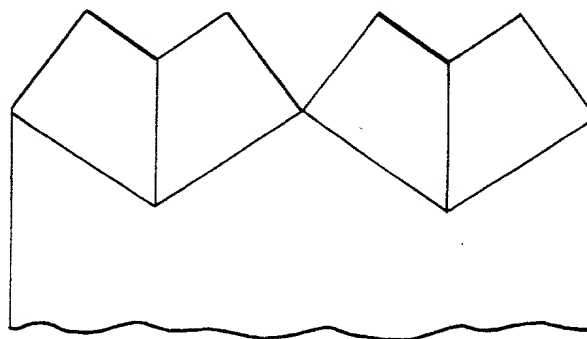


FIG. 35 ARRAY OF PENTA-FACE HEXAGONAL CUBES SHOWING A PLATE HIGHLIGHTED

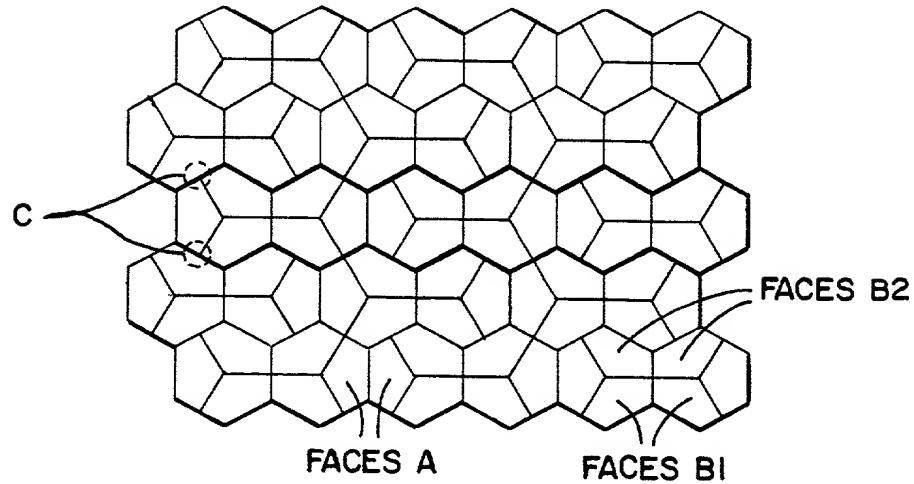


FIG. 36

ARRAY OF PENTAGONAL CUBES WITH
+8.7° AXIS TILT AND 89.8% AREA EFFICIENCY


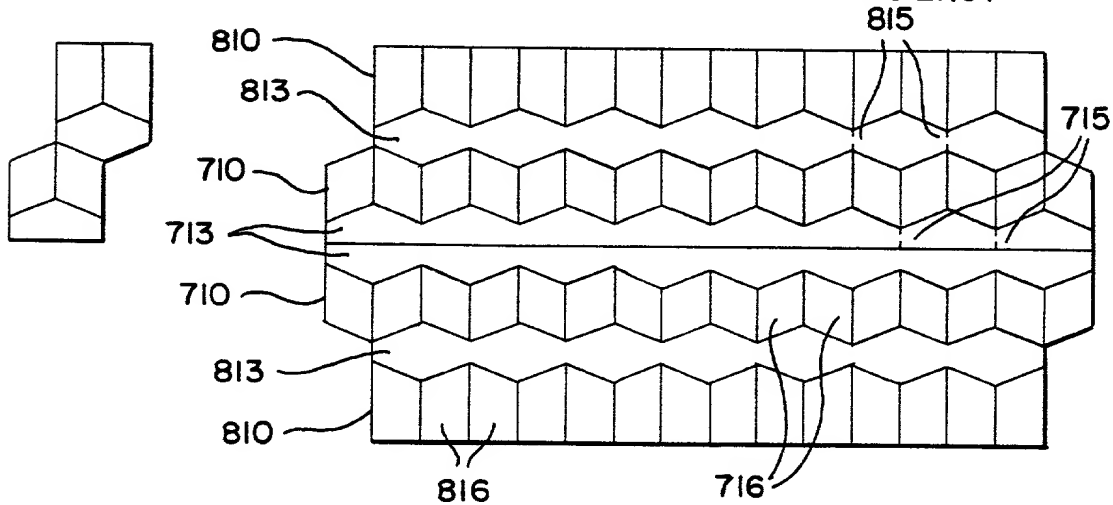


FIG. 36A



$$g = 2 \arctan \frac{\sqrt{3} \cos(v-u)}{\cos(v) - \sqrt{2} \sin(v)}$$

FIG. 37

PERFORMANCE OF SIMPLEST HEXBLADE ARRAY ($d/\lambda = 0.707$, $s/\lambda = 0$, NOT PAIRED)
FORMED IN MATERIALS OF DIFFERENT REFRACTIVE INDICES

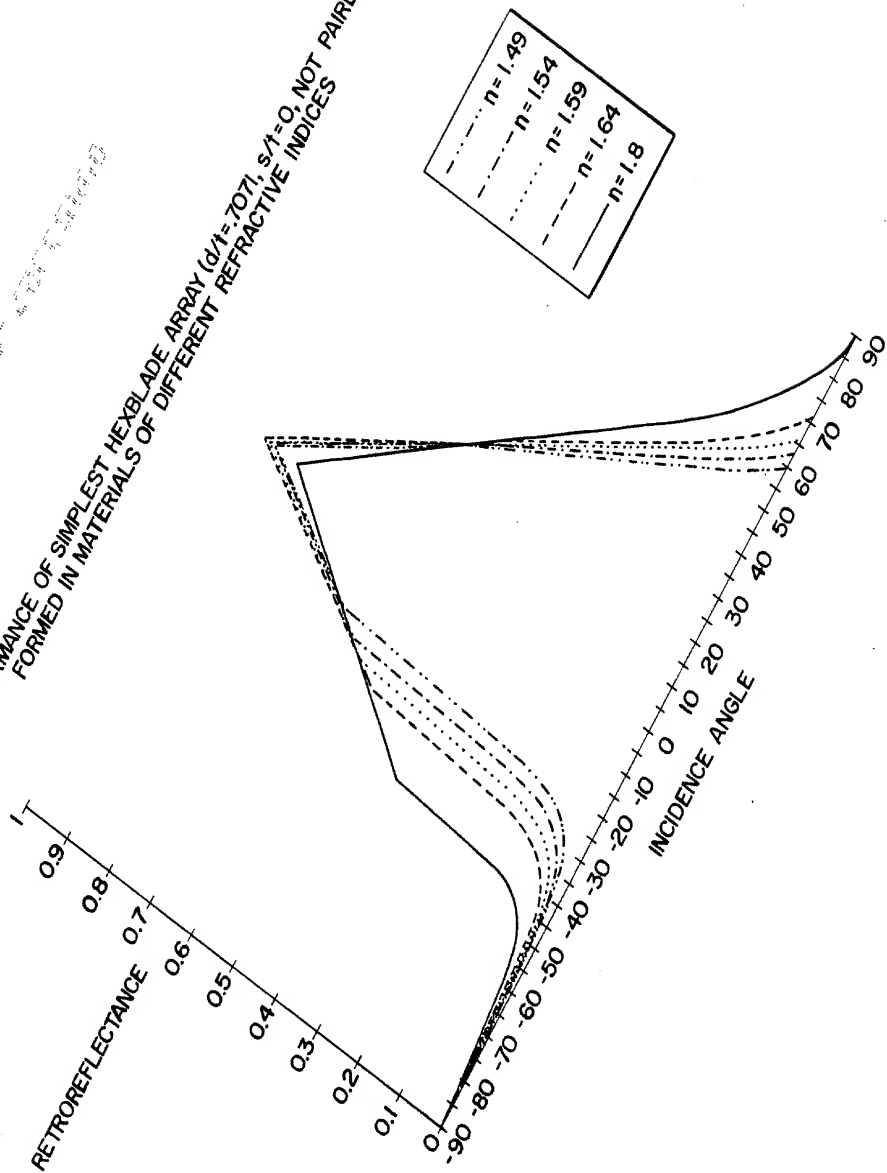


FIG. 38

PERFORMANCE OF HEXBLADE ARRAYS ($n=1.49$, $s/t=0$, NOT PAIRED)
OPTIMIZED FOR DIFFERENT INCIDENCE ANGLES

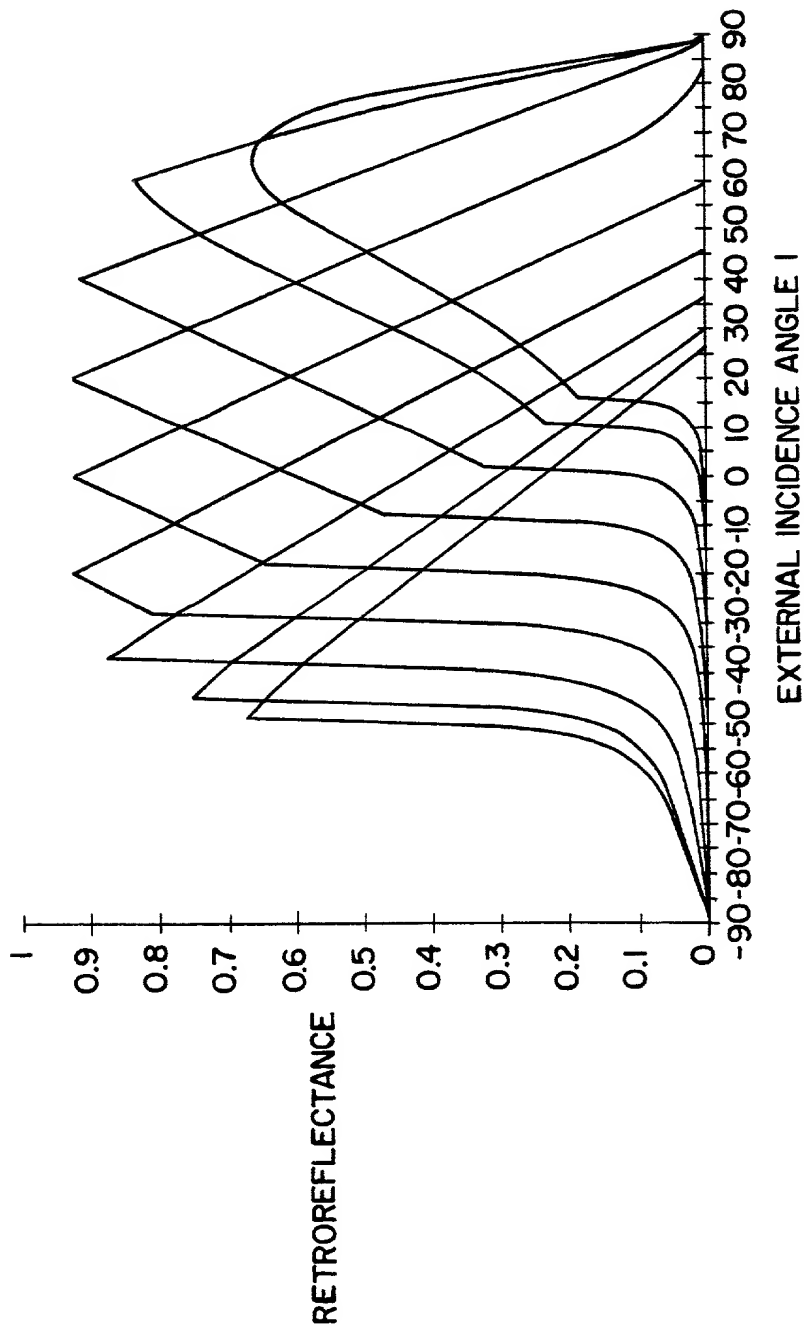


FIG. 39

PERFORMANCE OF HEXBLADE ARRAYS ($n=1.49$, $s/t=0$, NOT PAIRED) OPTIMIZED FOR DIFFERENT INCIDENCE ANGLES

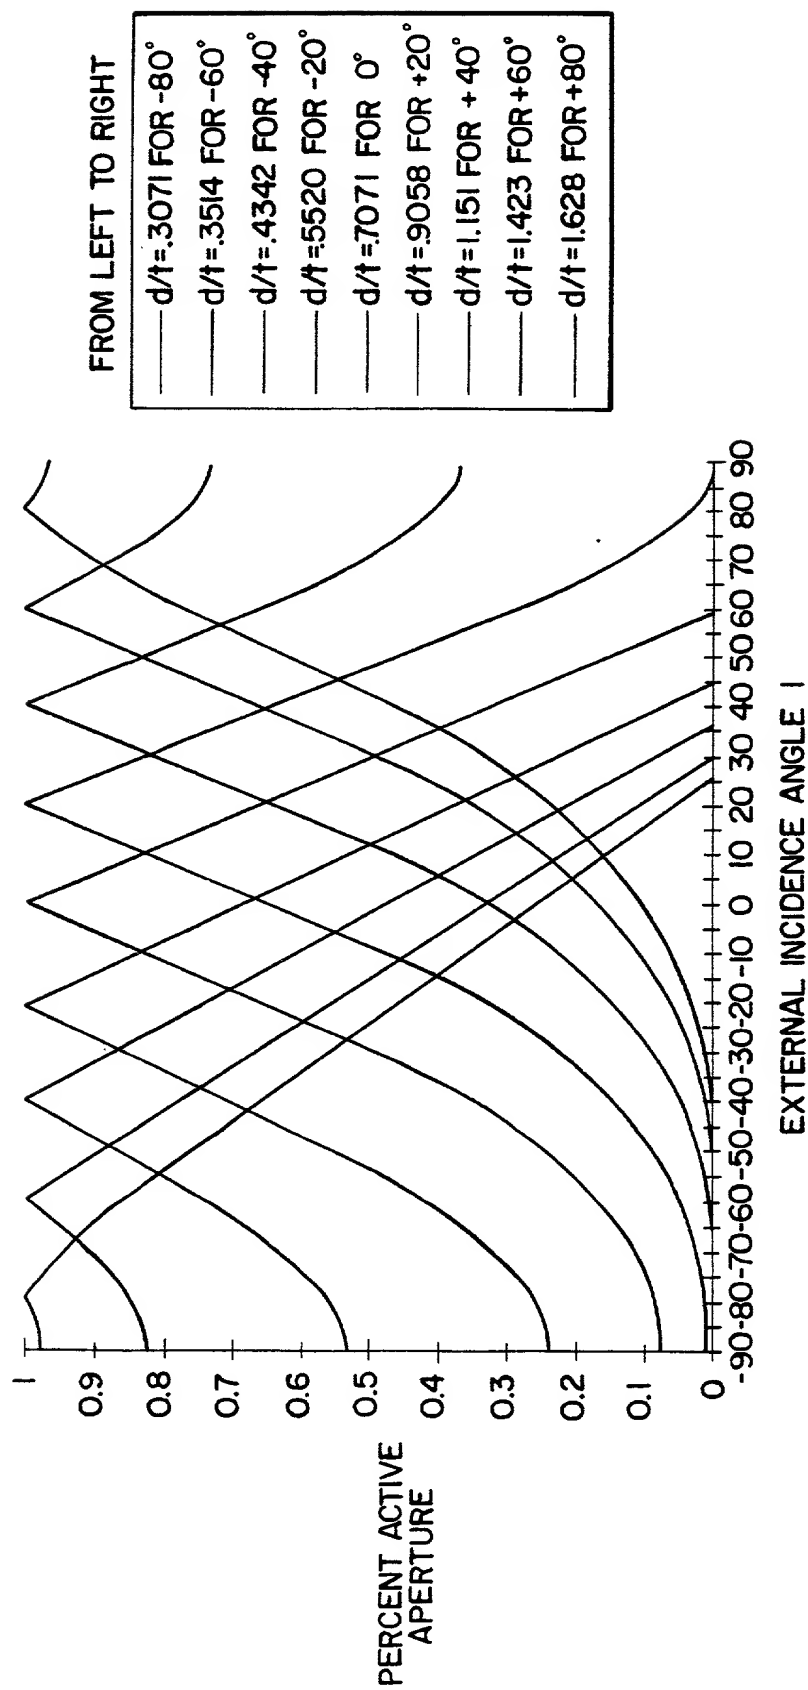


FIG. 40

RECTANGLE AND HEXAGON MICROCUBES OF EXAMPLE 1 (REFRACTIVE INDEX = 1.59)

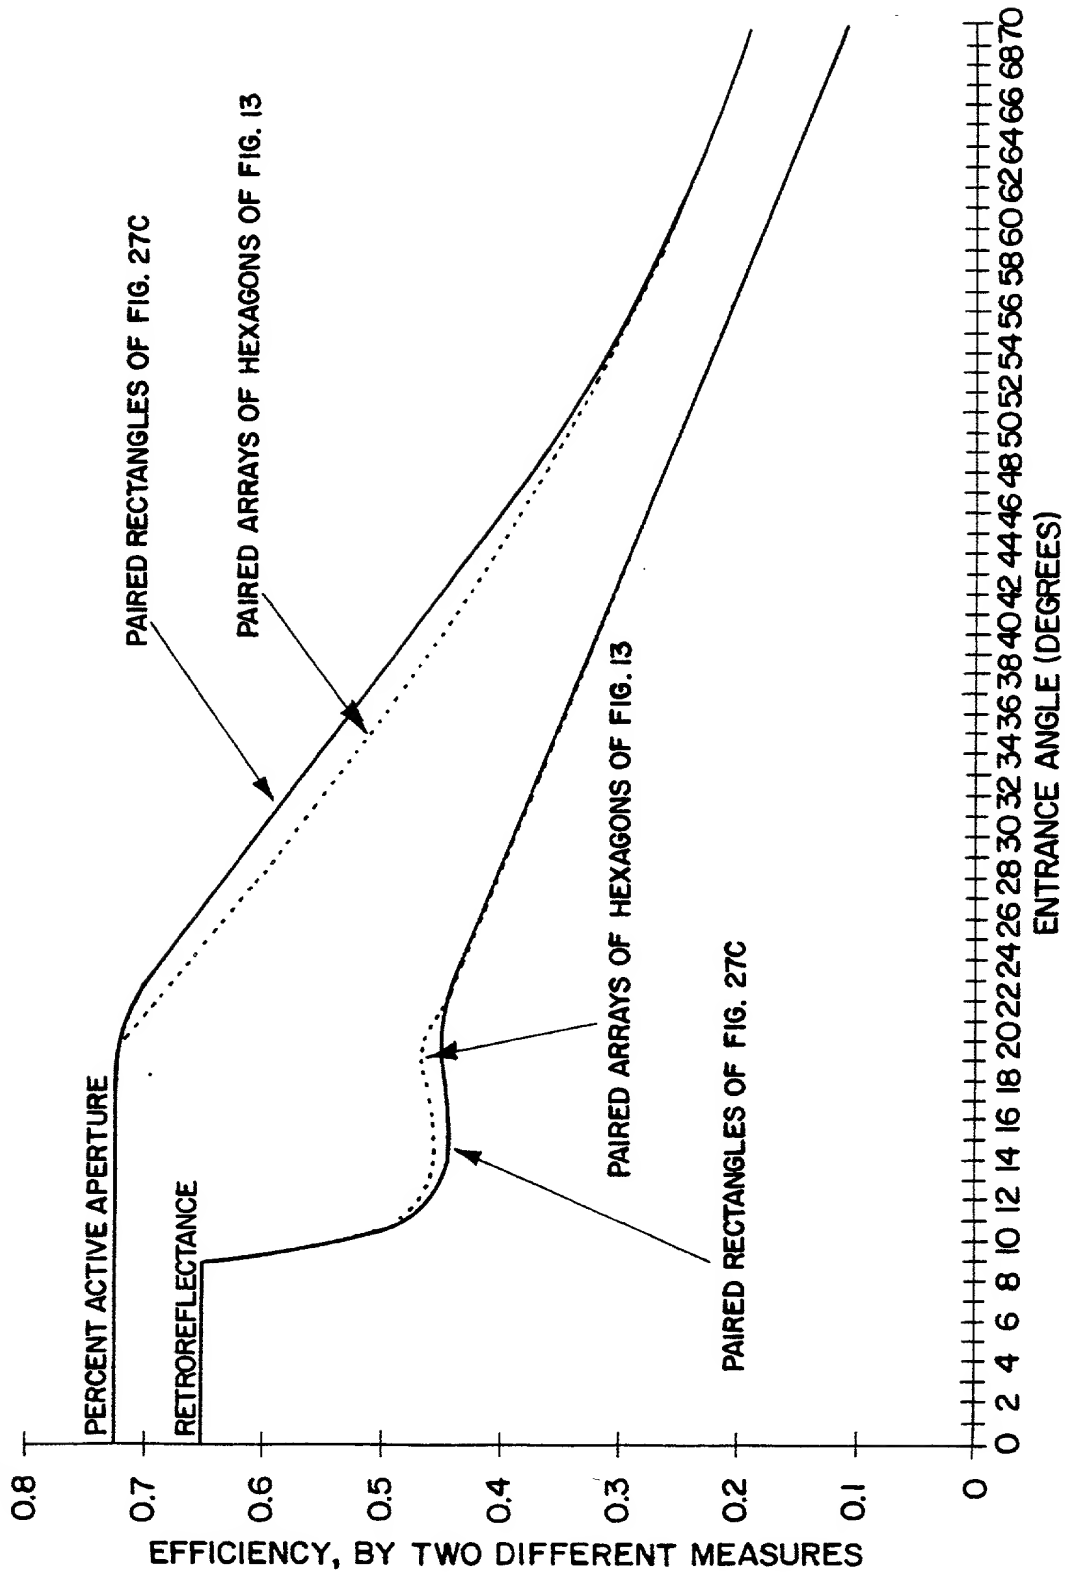


FIG. 41

PERFORMANCE OF RECTANGLE CUBES ($n=1.49$) IN A RAISED PAVEMENT MARKER (FRONT FACE 55 DEG. TO VERTICAL)

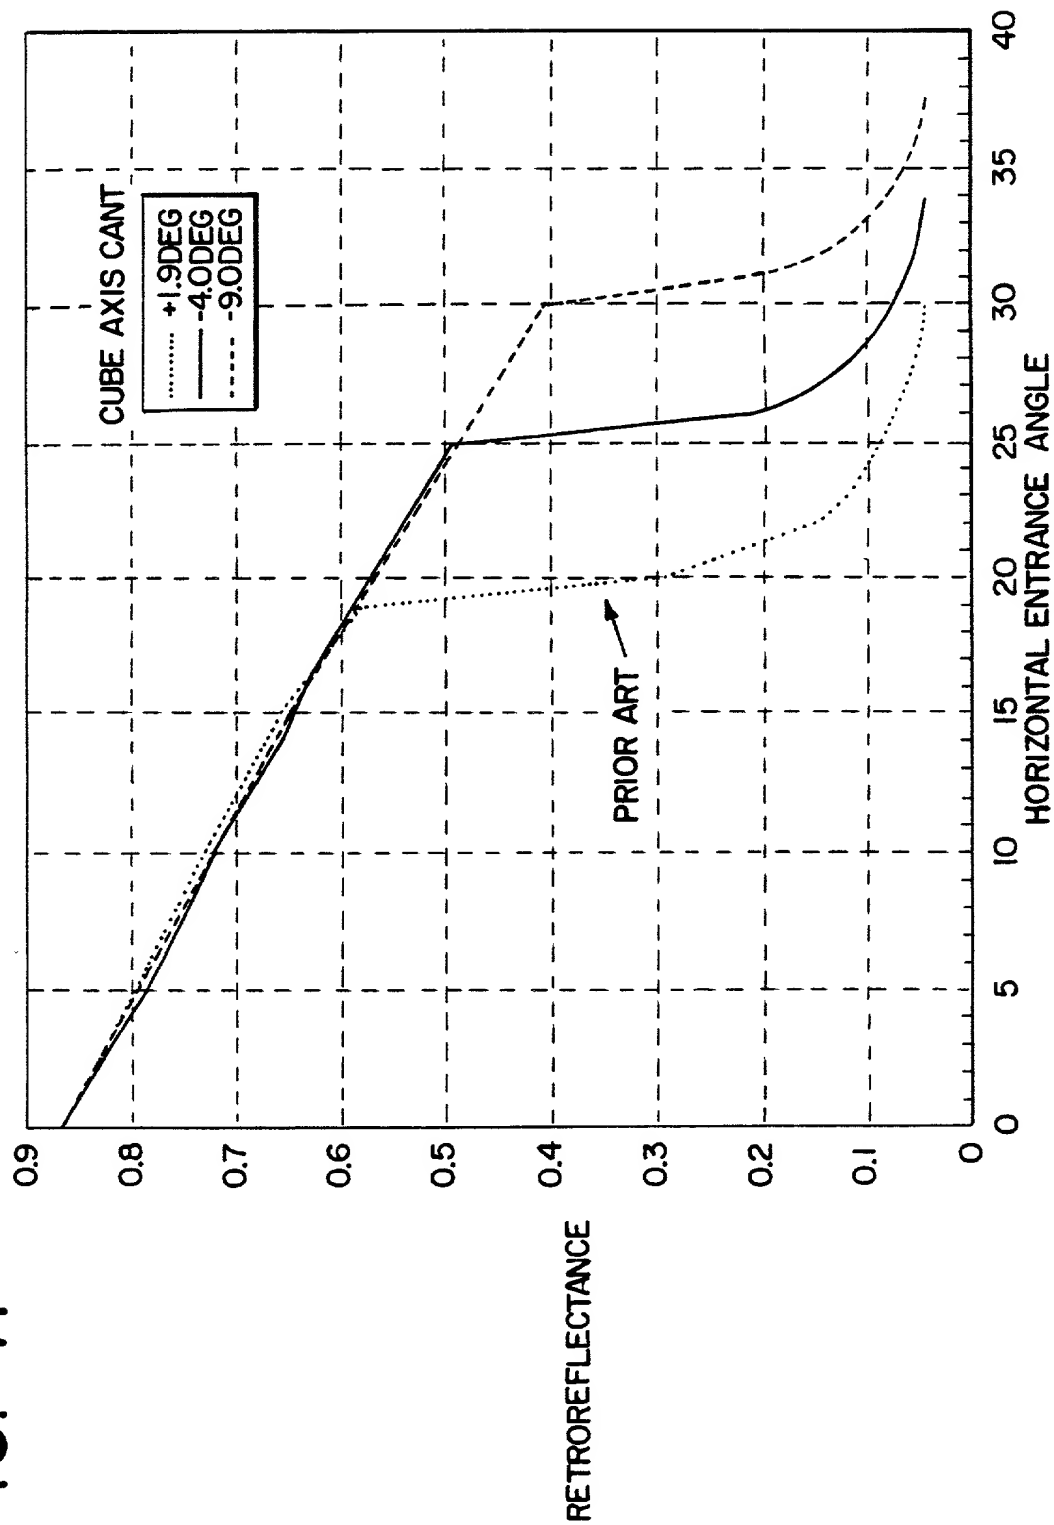


FIG. 42A

RETROREFLECTANCE VERSUS ENTRANCE
ANGLE FOR PAIRED ARRAYS 0

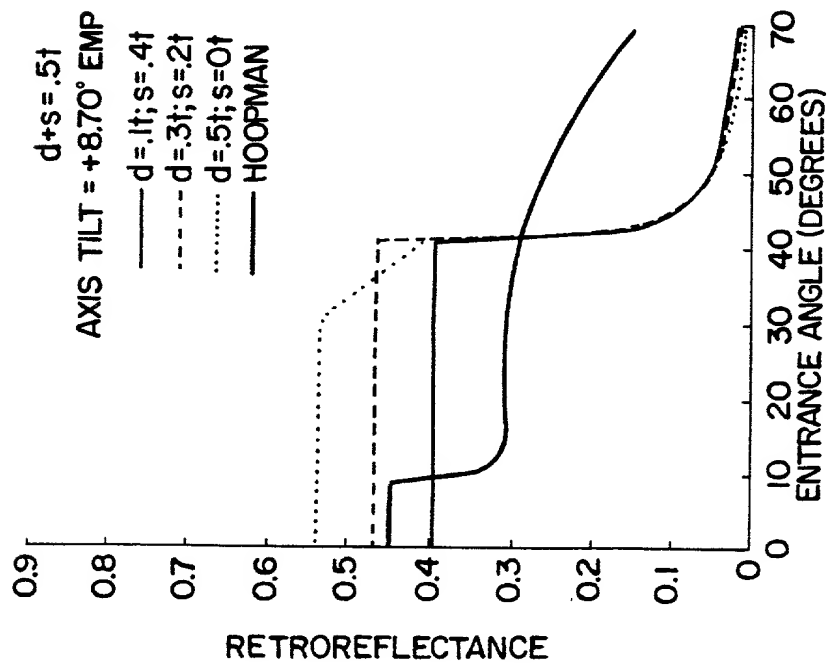


FIG. 42B

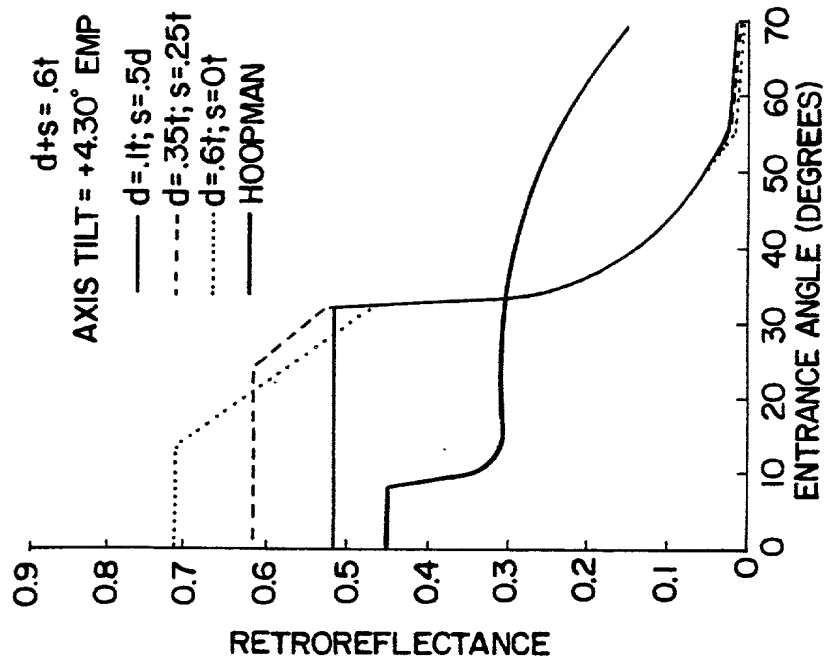


FIG. 42C

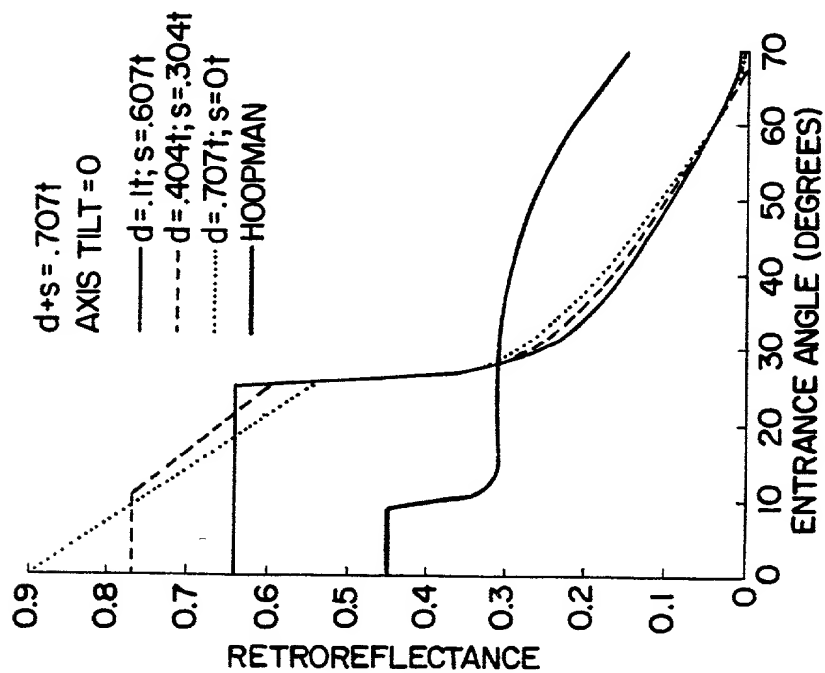


FIG. 42D

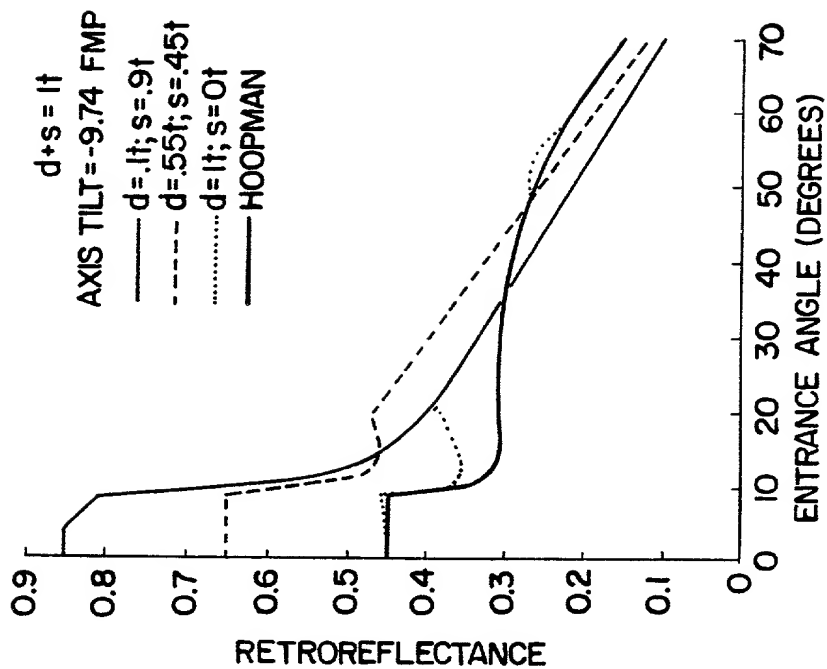


FIG. 42E

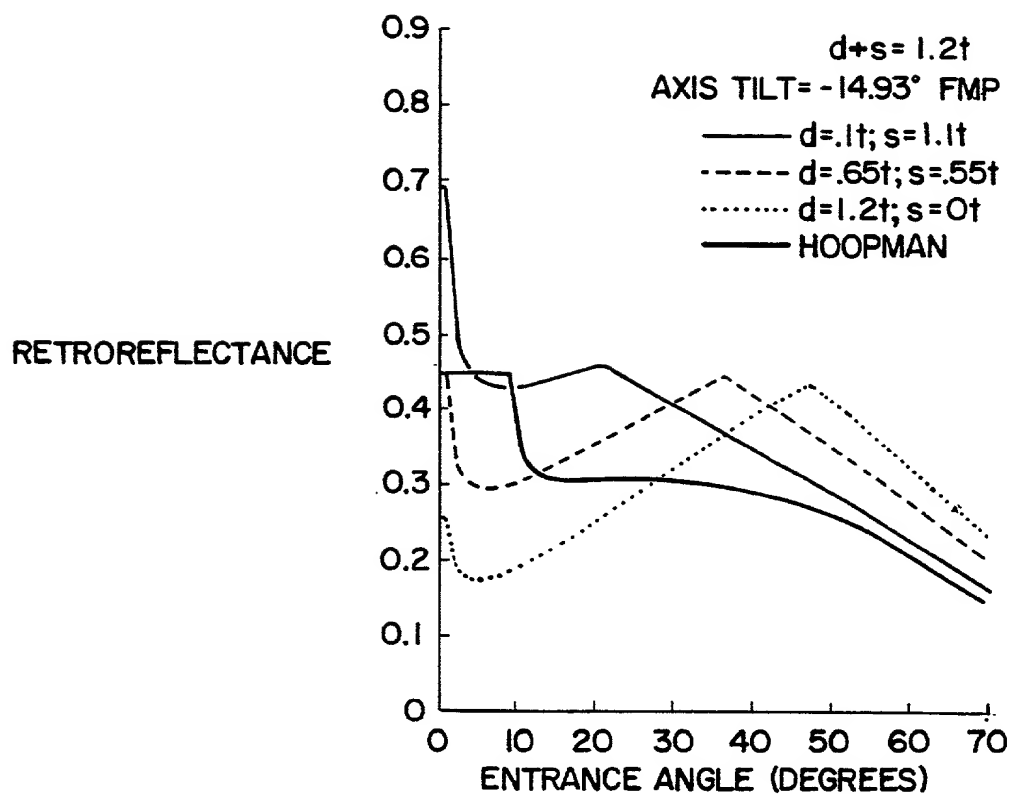


FIG. 43

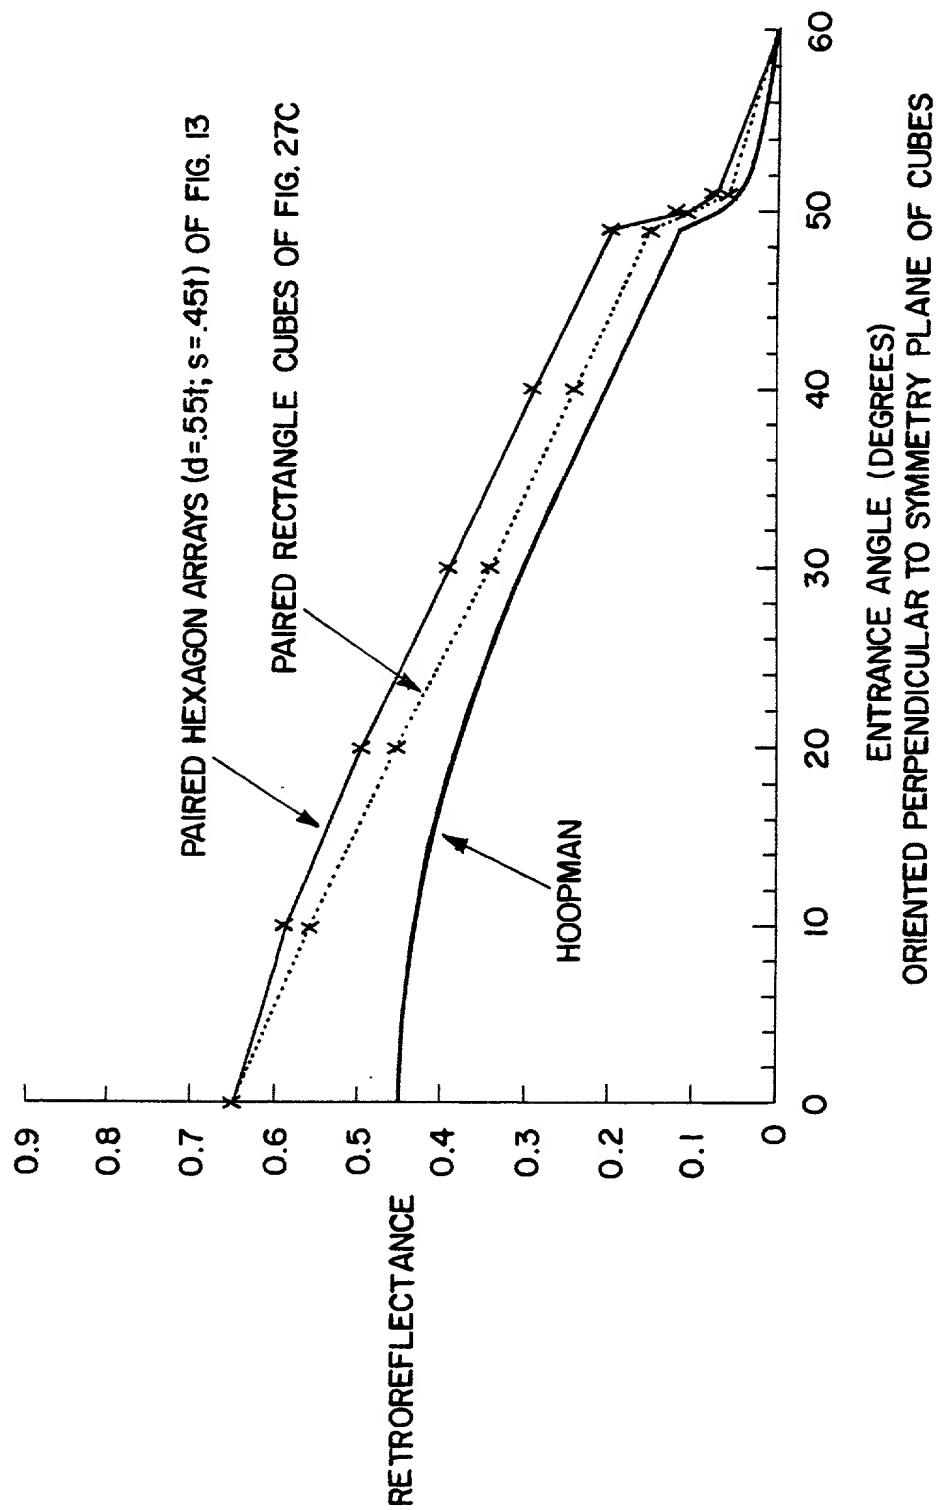


FIG. 44

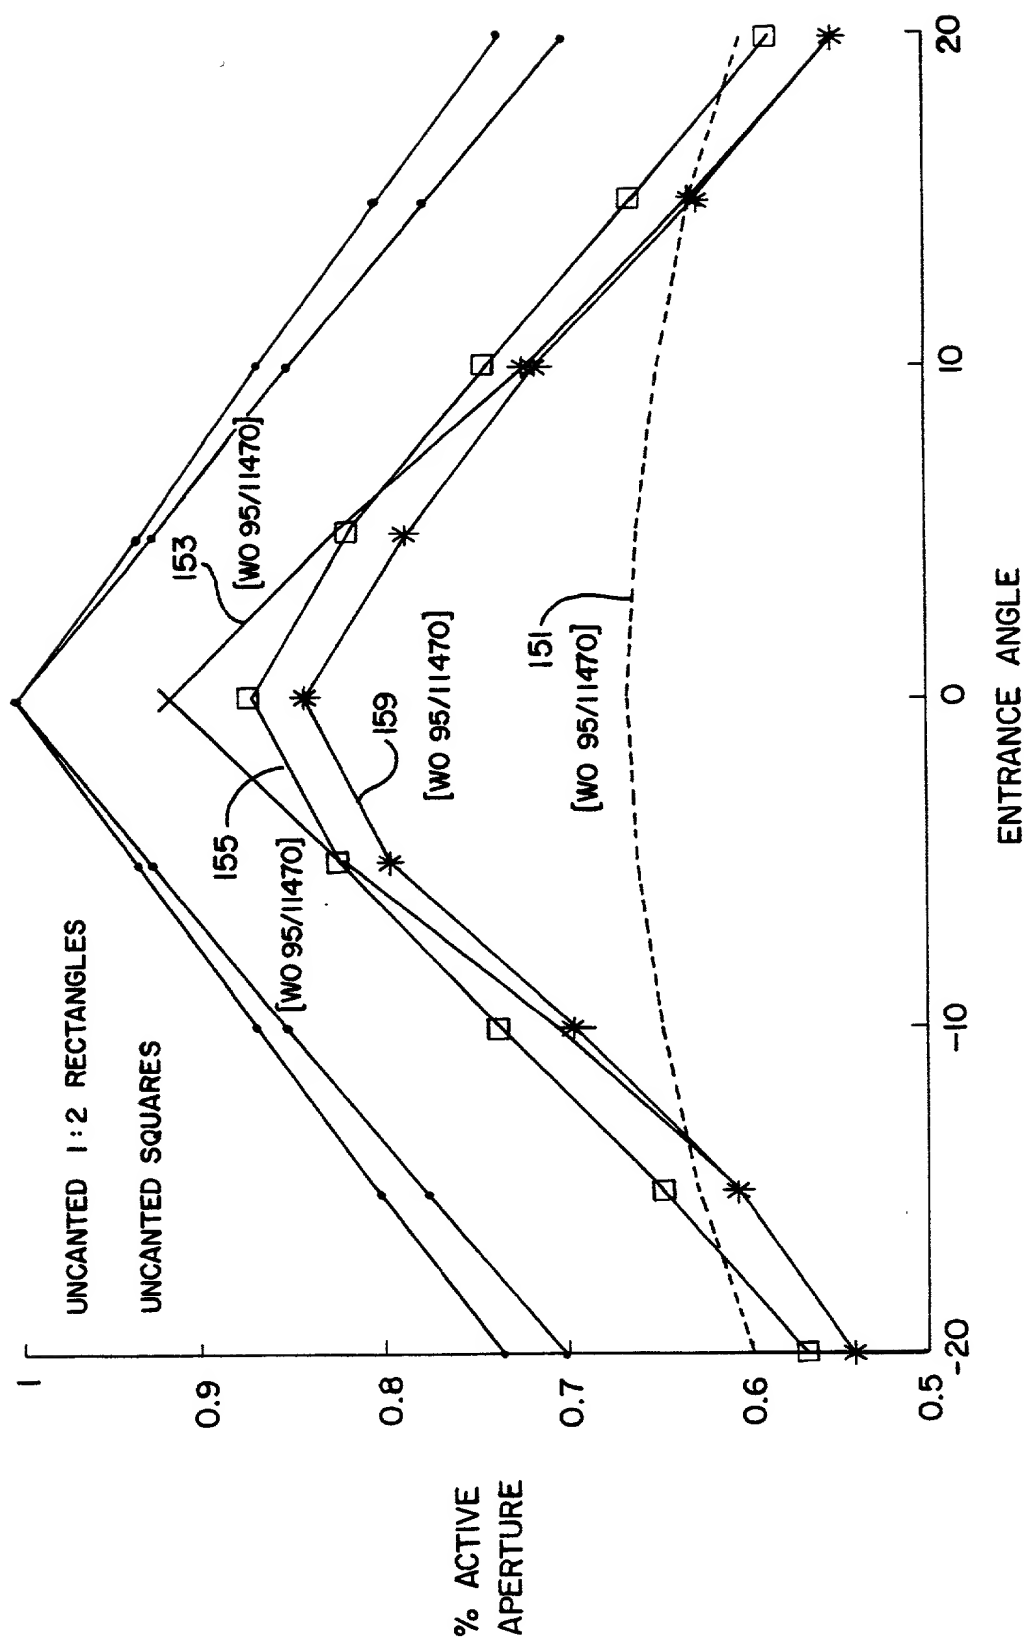
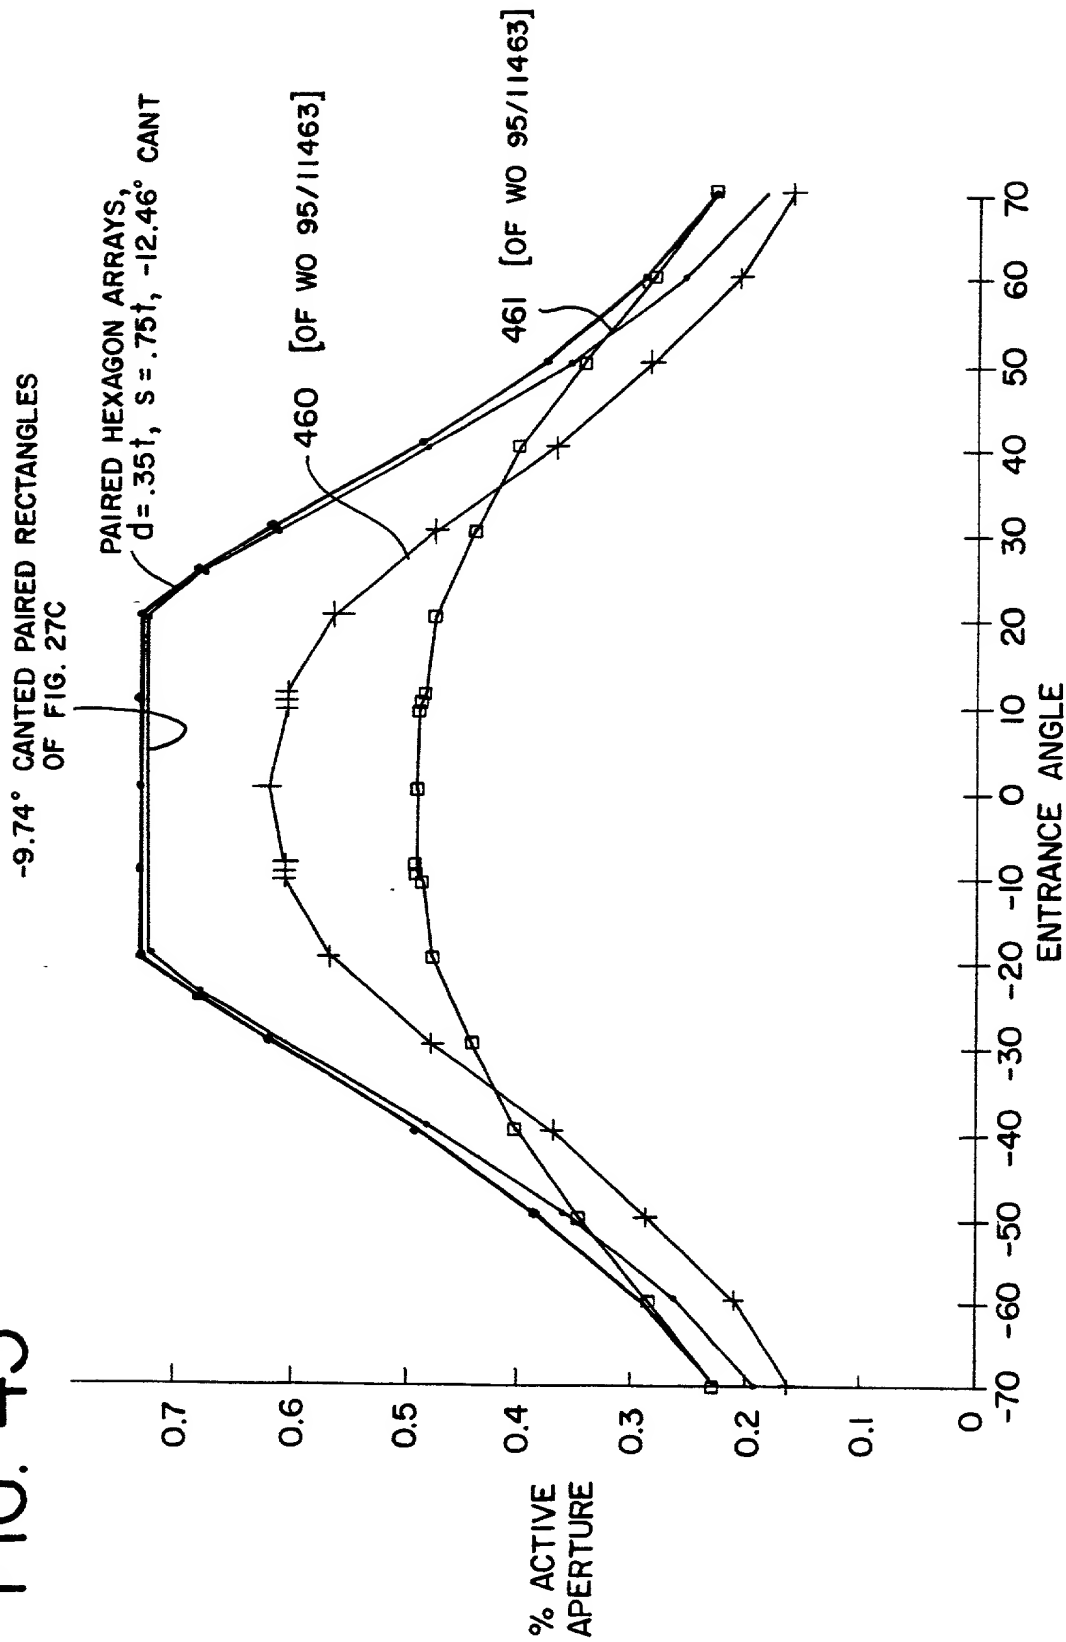


FIG. 45



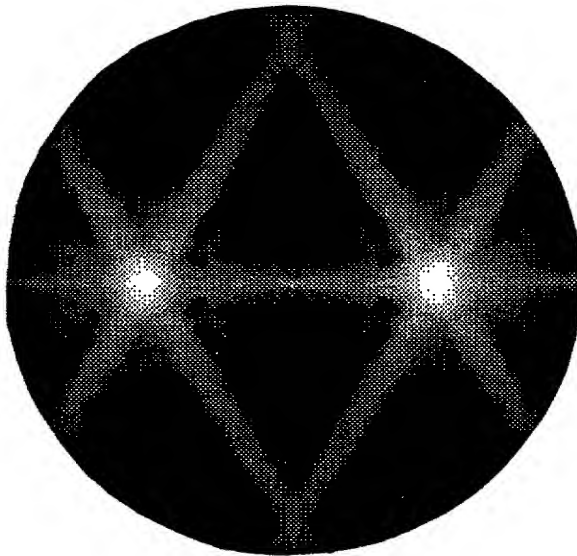


FIG. 46b

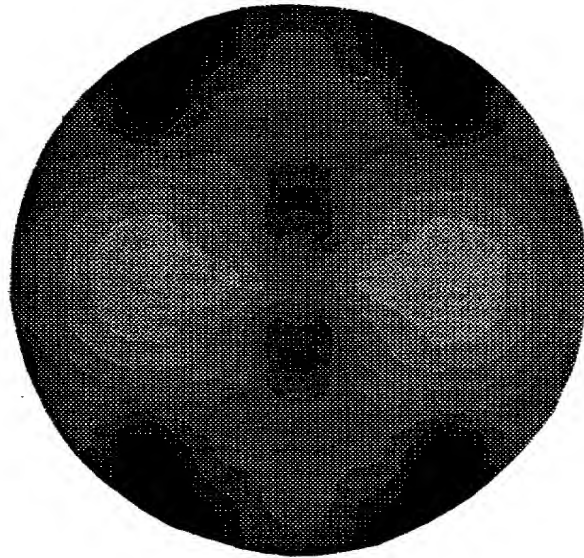


FIG. 46C

